

Vacuum Valves

Manually Operated
Electropneumatically Operated
Electromagnetically Operated
Special Valves
Gate Valves

Contents

General

The Oerlikon Leybold Vacuum Valve Program	C14.03
---	--------

Products

Small Valves of the “micro” Range

Overview	C14.07
Right-Angle and Straight-Through Valves, Bellows-Sealed, Various Drives	C14.08

Valves with ISO-KF Flanges

Overview	C14.11
----------	--------

Nominal Width DN 16 ISO-KF to DN 50 ISO-KF

Right-Angle and Straight-Through Valves, Bellows-Sealed, Manually Operated	C14.12
Right-Angle Valves, Bellows-Sealed, Electropneumatically Operated	C14.14
Straight-Through Valves, Bellows-Sealed, Electropneumatically Operated	C14.16
Right-Angle Valves, Bellows-Sealed, Electromagnetically Operated	C14.18

Valves with ISO-K Flanges

Overview	C14.20
----------	--------

Nominal Width DN 63 ISO-K to DN 160 ISO-K

Right-Angle Valves, Bellows-Sealed, Manually Operated	C14.21
Right-Angle Valves, Bellows-Sealed, Electropneumatically Operated	C14.22

Nominal Width DN 250 ISO-K Right-Angle Valves, Bellows-Sealed, Electropneumatically Operated

Special Valves with ISO-KF / ISO-K / CF Flange

Overview	C14.26
----------	--------

Nominal Width DN 10 ISO-KF to DN 40 ISO-KF or ISO-K

SECUVAC Vacuum Safety Valves	C14.27
Safety Valve	C14.30
Power Failure Venting Valves, Electromagnetically Actuated	C14.31
(Coarse) Variable-Leak Valves with and without Isolation Valve	C14.32
Venting Valves, Various Drives	C14.34
Vacuum Locks and Sealing Valves	C14.36
Ball Valves	C14.38
Right-Angle Valve for Mobile Systems according to DOT	C14.39
Accessories for the Electropneumatically Operated Valves, Valves with ISO-KF / ISO-K Flange	C14.40
Special Valves for Turbomolecular Pumps	C14.42

Nominal Width DN 16 CF to DN 63 CF

UHV Valves

All-Metal Right-Angle Valves	C14.43
All-Metal Variable Leak Valves	C14.44


Gate Valves with ISO-KF / CF / ISO-F Flange

Overview	C14.45
Miniature UHV Gate Valves, ISO-KF and CF Flange	
Manually Operated,	C14.46
Electropneumatically Operated,	C14.50
HV Gate Valves, ISO-F Flange	
Manually Operated	C14.52
Electropneumatically Operated	C14.54
UHV Gate Valves, Manually Operated, CF Flange	C14.56
UHV Gate Valves, Electropneumatically Operated	
ISO-F Flange	C14.58
CF Flange	C14.60

The Oerlikon Leybold Vacuum Valve Program

The long-standing experience of Oerlikon Leybold Vacuum in the area of vacuum engineering is reflected in the selection and the design of the valves and vacuum protection components for a wide variety of applications. The range of products is such that a reliable solution can be offered for every vacuum engineering application. Many years of service and the reliability of the valves is ensured by design. Oerlikon Leybold Vacuum valves are well-proven in many widely varying areas of research and industry.

The Design of a Vacuum Valve Scope of the Range of Valves

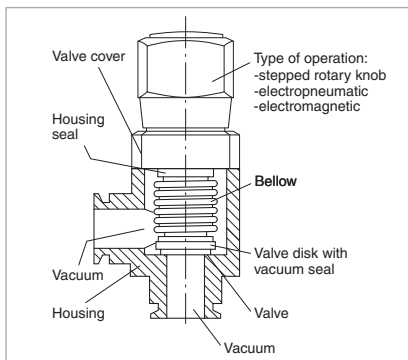

The range of Oerlikon Leybold Vacuum valves comprises:

- Small valves **micro**
- Right-angle and straight-through valves (no slanted seat valve) with a nominal width of DN 16 to DN 40 with ISO-KF flanges
- Right-angle valves with a nominal width of DN 63 to DN 250 with ISO-K flanges
- Gate valves with a nominal width of DN 16 to DN 250 with various flanges
- Ball valves
- Special valves

It is the aim of Oerlikon Leybold Vacuum to meet, through the offered range of isolation components and valves, the customers requirements regarding the design of such components. For this reason all valves are available with different driving systems.

With the exception of the special valves you may select between a stepped rotary knob manual drive, an electropneumatic drive or an electro-magnetic drive system.

Right-angle valves DN 16 ISO-KF to DN 40 ISO-KF as well as DN 63 ISO-K to DN 160 ISO-K are either available with an aluminium or stainless steel body (the latter up to DN 100 ISO-K only).

The special characteristics of the application in each case result in special requirements concerning features of the valves, for example:

- Coating
 - Short switching cycles (e.g. 1.5 s)
 - Very high number of opening and switching cycles (e.g. over 10 million cycles)
- Analytical engineering
 - High conductance (similar to the corresponding flange components, like bends, for example)
 - High integral leak tightness for the valves (leak rates below 10^{-9} mbar l/s)
- Lamps and tubes manufacture
 - Temperature resistant
 - Permissible ambient temperatures, 50 °C max.
- Accelerator technology
 - Materials capable of resisting radiation, high temperatures and corrosion at the same time
- Metallurgy and furnace manufacture
 - Rugged and insensitive to contamination
- Chemistry
 - Choice of materials in contact with the medium for the valve body

All applications have the following requirements in common:

- Quiet opening action with very little vibration
- Compact design, low weight
- Highly visible, unambiguous position indicator
- For use within the pressure range from 10^{-8} to 2500 mbar, if not stated otherwise
- Fully operational within the entire specified pressure range

Oerlikon Leybold Vacuum valves meet these requirements, unless otherwise stated by the technical data.

Quality Assurance

The various markets, like Analytical or Coating, for example are very demanding regarding certain important features for the valves which are to be used in the new generation of instruments currently under development. Demanded are, among other things, high reliability during the entire service life, high integral leak tightness, a high number of opening/closing cycles as well as a fast response.

The valves from Oerlikon Leybold Vacuum meet all these demanding requirements!

For further information on flange connections and flange components please refer to Product Section C13 "Vacuum Fittings ISO-KF, ISO-K, ISO-F, CF and Feedthroughs".

Flange Designations

The flange designations used in this Product Section are in line with the international standards and the nomenclature used in practice:

Flange Type	Standard	Designation with standardized nominal width ¹⁾ (DN)
Small flanges	ISO 2861/1	"ISO-KF"
	DIN 28 403	e.g. DN 40 ISO-KF
Clamp flanges	ISO 1609	"ISO-K"
	DIN 28 404	e.g. DN 100 ISO-K
Fixed flanges/ collar flanges with retaining ring	ISO 1609	"ISO-F"
	DIN 28 404	"F" for fixed flange e.g. DN 250 ISO-F

In the case of gate valves equipped with CF flanges the following must be noted:

The designation DN 35 CF for UHV flanges has been changed to DN 40 CF with the sealing parameters remaining unchanged; the same applies to DN 150 CF which has changed to DN 160 CF.

Advantages to the User

- Compact design
- Integral leak rate less than 10^{-8} mbar l x s⁻¹
- FPM (FKM) sealed
- For pressures up to 2000 mbar
- Seal in both directions ²⁾
- Principal dimensions comparable to Oerlikon Leybold Vacuum flange components of the same nominal width
- Reliable operation ensured regardless of the valve's orientation
- Optical valve position indicator as standard (not for valves of the "micro" range)
- Electrical valve position indicator as standard (not for valves of the "micro" range)
- Operation of electromagnetic ISO-KF valves off supply voltages ranging from 100 to 230 V AC

- The inside of the housing in contact with the medium is sealed off against the atmosphere by a bellows type seal which is absolutely free of any lubricants.

All further technical data as well possible deviations from the general specifications stated here can be found along with the descriptions for the individual valve types.

For various applications and special design requirements Oerlikon Leybold Vacuum offers a range of special valves:

- SECUVAC vacuum safety valves (DN 16 ISO-KF to DN 100 ISO-K)
- Venting valves / power failure venting valves
- Vacuum locks / sealing valves
- Variable leak valves
- Ball valves (straight-through valve)
- Right-angle valves for mobile systems which comply with the American standard of the Department of Transportation (DOT)

Accessories

All connecting components like centering rings, clamps or clamping rings needed to connect the valves must be ordered separately (see Product Section C13 "Vacuum Fittings ISO-KF, ISO-K, ISO-F, CF and Feedthroughs").

Materials

The valve bodies and the inside parts are made of selected, vacuum compatible materials, like wrought aluminum or cast stainless steel.

The raw components are subjected to a 100% test before they are further processed.

The materials which are used are described in the tables at the end of the section "General".

Gaskets

Shown in the table at the end of the section "General" are the types of gasket used in the valves together with their brief or chemical designations and their thermal ratings.

Other Materials

Plastic:	Polyamide 6 (PA 6)
Grey cast iron:	GG 20 (0.6020)
Brass:	Ms 58
Brass	
(nickel-plated):	CuZn39Pb3
Nimonic	
Bronze	
Spring steel	

¹⁾ The standardized nominal width (DN) corresponds approximately to the inside diameter, but need not necessarily be identical to the inside diameter.

²⁾ High vacuum systems are very demanding as to the leak tightness of the vacuum components used. For this reason each individual Oerlikon Leybold Vacuum valve is subjected to a helium leak test before delivery. The valves are only considered as leak tight, if a leak rate of less than 10^{-9} mbar x l x s⁻¹ can be measured for the body and the valve seat.

In the case of our high vacuum valves with ISO-KF and ISO-K flanges a leak rate of less than 10^{-9} mbar x l x s⁻¹ is maintained also during actuation.

This means that in the case of a gas flow of the mentioned order of magnitude the pressure would increase only by 3 mbar in a vessel of 1 liter and in 100 years.

Materials

Aluminum Alloys

Material No.		Brief Designation
DIN	AA	DIN
3.0615	–	AlMgSiPbF28
3.2153	–	G AlSi7Cu3
3.2315	6081	AlMgSi1F28
3.2341	–	G AlSi5Mg wa
3.2371	–	G AlSi7Mg06
3.2373	–	G AlSi9Mg
3.2381	–	G AlSi10Mg wa
3.3527	–	AlMg2Mn0,8F20

Stainless Steels

Material No.		Brief Designation
DIN	AISI	DIN
1.4034	420	X 46 Cr 13
1.4301	304	X5 CrNi 18 10
1.4305	303	X10 CrNi 51 89
1.4306	304 L	X2 CrNi 18 10
1.4308	–	G-X6 CrNi 18 1
1.4310	301	X12 CrNi 17 7
1.4404	316 L	X2 CrNiMo 17 13 3
1.4435	316 L	X2 CrNiMo 18 14 3
1.4541	321	X10 CrNiTi 18 10
1.4571	316 Ti	X6 CrNiMoTi 17 12 2

Standard Steels

Material No.	Brief Designation
DIN	DIN
1.0388	St4/St14
1.0425	H II

Materials used for the Gaskets

Brief Designation	Chemical Designation	Typical Trade Name	Degassing Temperature
FPM (FKM)	Fluor caoutchouc	Viton	up to 150 °C
NBR	Acrylonitrile-butadiene rubber	Perbunan	up to 80 °C
PTFE	Polytetrafluor ethylene	Teflon	up to 250 °C
EPDM	Ethylene-propylenedien caoutchouc	–	up to 150 °C


Abbreviations used in the valve designations

Brief Designation	Valve Type
EMD	Solenoid straight-through valve
EME	Solenoid right-angle valve
EPD	Electropneumatic straight-through valve
EPE	Electropneumatic right-angle valve
MAN	Manual operation
PD	Pneumatic straight-through valve
PE	Pneumatic right-angle valve

Products

Small Valves of the “micro” Range

Overview

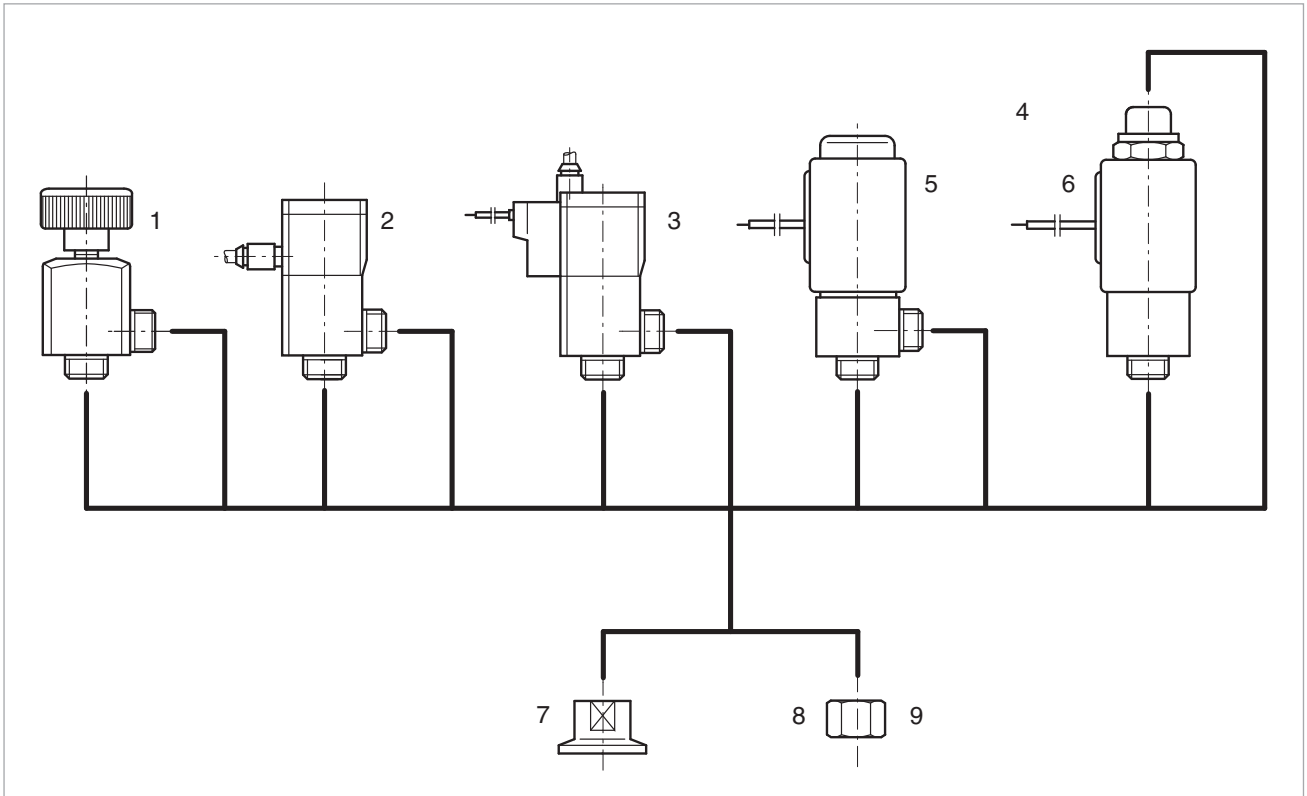

Oerlikon Leybold Vacuum small valves **micro** are available with any of four drive systems, two types of body and three adapters.

Types of drive


- Manual (1)
- Pneumatic (2)
- Electropneumatic (3)
- Electromagnetic (4)

Types of valve body


- Right-angle valve (5)
- Straight-through valve (6)

as well as adapter

- DN 10 ISO-KF flange (7)
- 1/4" tube (8)
- 6 mm tube (9)

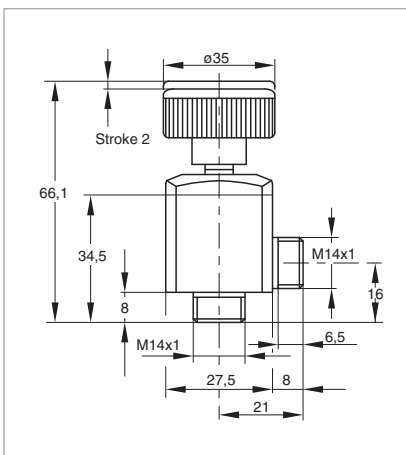

Dimensional drawing for the **micro MAN**

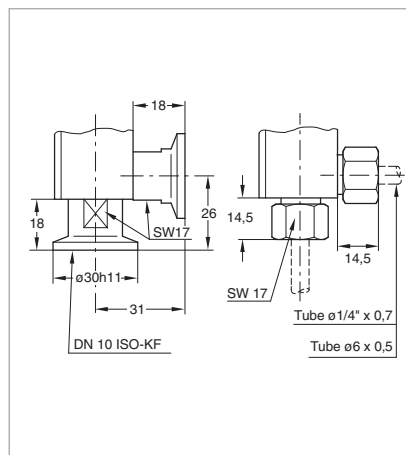


Connection dimensions for small valves **micro**

Technical Information


micro valves are supplied without adaptor.

The adaptors must be ordered additionally.


Right-Angle and Straight-Through Valves, Bellows-Sealed, Various Drives

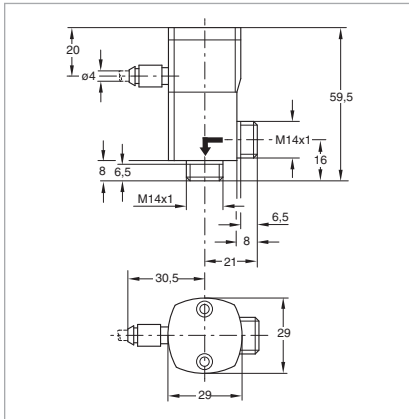

Dimensional drawing for the pneumatically actuated small valves **micro**

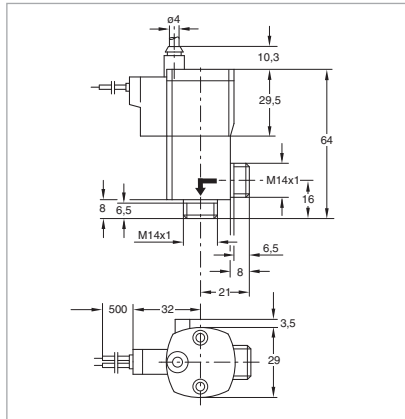

Dimensional drawing for the electropneumatically actuated small valves **micro**

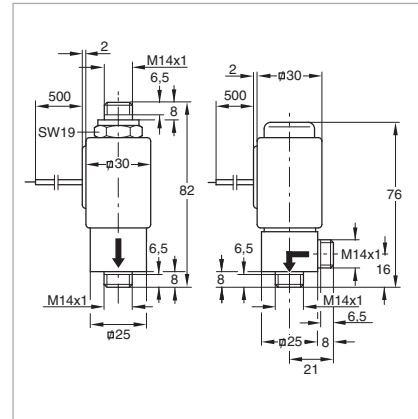

Dimensional drawing for the electromagnetic actuated small valves **micro**

Advantages to the User

- Small size
- High conductance in the molecular flow range
- Long service life of over 2 million switching cycles
- High switching frequency
- Protection class IP 50

Typical Applications

- Gas handling systems in production machines
- Latest generation analytical equipment

Technical Data

Small Valves "micro"

		Manual	Electropneumatic	Pneumatic	Electromagnetic
Nominal width	mm	5	5	5	5
Integral leak rate	mbar x l/s	10 ⁻⁹	10 ⁻⁹	10 ⁻⁹	10 ⁻⁹
Switching cycles		-	5 mio.	5 mio.	2 mio.
Max. pressure differential	bar abs.	4	3	3	1
Closure time	ms	-	35	35	7
Opening time	ms	-	35	35	30
Max. switching frequency	min ⁻¹	-	150	150	300
Conductance, molecular	l/s	0.4	0.4	0.4	0.3
Supply voltage	V DC	-	24 (with pilot valve)	-	24
Max. power consumption	W	-	1	-	10
Material					
Valve body		stainless steel (1.4301)	stainless steel (1.4301)	stainless steel (1.4301)	stainless steel (1.4301)
Inside section		stainless steel (1.4301)	stainless steel (1.4301)	stainless steel (1.4301)	stainless steel (1.4301)
Gaskets		O-rings of FPM (FKM)	O-rings of FPM (FKM)	O-rings of FPM (FKM)	O-rings of FPM (FKM)
Drive		aluminum/plastic	aluminum anodized	aluminum anodized	stainless steel 1.4105

Ordering Information

Small Valves "micro"

		Manual	Electropneumatic	Pneumatic	Electromagnetic
Right-Angle Valves		Type			
Manual	MAN	Part No. 284 48	-	-	-
Without pilot valve, normally closed	PE	-	-	Part No. 284 40	-
With pilot valve, normally closed	EPE	-	Part No. 284 41	-	-
With pilot valve, normally open	EPE	-	Part No. 284 42	-	-
With pilot valve, normally closed, with flanges	PE DN 10 ISO-KF	-	-	Part No. 284 47	-
Electromagnetic, normally closed	EME	-	-	-	Part No. 284 44
Straight-Through Valves					
Electromagnetic, normally closed	EMD	-	-	-	Part No. 284 45
Electromagnetic, normally open	EMD	-	-	-	Part No. 284 46
Adapter (1 piece)					
Flange DN 10 ISO-KF		Part No. 284 50	Part No. 284 50	Part No. 284 50	Part No. 284 50
Tube 1/4"		Part No. 284 51	Part No. 284 51	Part No. 284 51	Part No. 284 51
Tube 6 mm		Part No. 284 52	Part No. 284 52	Part No. 284 52	Part No. 284 52
Spare parts					
Seal kit		-	Part No. 105 81	Part No. 105 81	Part No. 108 82
Spare part kit		Part No. 105 85	Part No. 105 82	Part No. 105 82	-
EME		-	-	-	Part No. 105 83
EMD		-	-	-	Part No. 105 84

Valves with ISO-KF Flanges

Overview



Oerlikon Leybold Vacuum ISO-KF valves are available with any of four drive systems and four types of body having a nominal width of DN 16, 25, 40 and 50 ISO-KF.

Abbreviations used in connection with bellows sealed valves:

B Bellows sealed

A Angle (valve)

I Inline (valve)

V Valve

M Rotary knob

P Pneumatically actuated
(without pilot valve)

EP Electropneumatically actuated
(with pilot valve)

EM Electromechanically actuated

AL Aluminum body

SS Stainless steel body

BAV ... EP AL ...

Types of drive

- Rotary knob **1** with bellows seal
- Pneumatic **2** with bellows seal
- Electropneumatic **3** with bellows seal
- Solenoid with bellows seal **4**

Types of valve body

- Right-angle valve, aluminum body **5**
- Right-angle valve, stainless steel body **6**
- Straight-through valve, stainless steel body **7**
- Straight-through valve, aluminum body **8**


Materials Used

	Aluminum version	Stainless steel version
Housing	Aluminum (AlMgSi) EN-AW 6060 ¹⁾	Stainless steel (AISI 304)
Inner section ¹⁾	Aluminum (AlMgSi)	Stainless steel (AISI 304)
Drive unit ²⁾	Aluminum	Aluminum
Valve disk	AISI 316L	AISI 316L
Bellows	AISI 316L (1.4404)	AISI 316L (1.4404)
Head and disk O-ring	Viton	Viton
Rotary knob	Plastic	Plastic
Position indicating cover ²⁾	Plastic	Plastic
Housing cover ¹⁾	Plastic	Plastic

¹⁾ For the solenoid version only

²⁾ For pneumatic and electro-pneumatic version only

Right-Angle Valves, Bellows-Sealed, Manually Operated

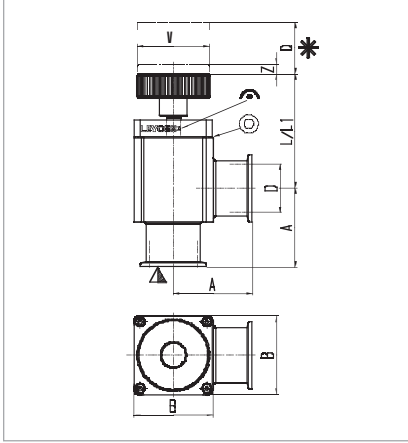

Dimensional drawing for the manually operated, bellows-sealed, right-angle valves

Dimension Table

DN	ISO-KF	16	25	40	50
A	mm	40	50	65	70
B	mm	40	48	65	77
D	mm	16	25	40	50
L ¹⁾	mm	64.9	60.9	94.3	101.1
L1 ²⁾	mm	67.4	64.3	97.3	104.1
Q	mm	46.0	44.0	73.5	85.5
V	mm	40	40	60	60
Z ³⁾	mm	3.6	4.7	7.9	9.3

1) Aluminum version

2) Stainless steel version

3) Disk stroke is greater due to the transmission

Advantages to the User

Valves with Rotary Knob

- Allow also for reduced venting of systems
- Suited as a manually operated variable leak valve to roughly control gas flows
- Leak tight in both directions up to a pressure of 2.0 etc. 1.5 bar and easy to open
- Installation in any orientation

Connection Icons

▽ Side of the valve seat

* Required clearance

⤴ Mechanical position indicator

⊙ Leak detection bore


Technical Data

		DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF	
		Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel
Service life	cycles	20,000	20,000	20,000	20,000	20,000	20,000	20,000	20,000
Conductance at molecular flow	$l \times s^{-1}$	5	5	14	14	45	45	50	50
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}
Operating pressure range	mbar	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000
Differential pressure, closing and opening direction	bar	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2
Ambient / operating temperature, max.	°C	80	80	80	80	80	80	80	80
Seal		FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)
Weight	kg	0.24	0.30	0.36	0.47	0.92	1.08	1.34	1.52

Ordering Information

	DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF	
	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel
Right-Angle Valve, rotary knob								
BAV ... M AL	Part No. 215 375	-	Part No. 215 376	-	Part No. 215 377	-	Part No. 215 378	-
BAV ... M SS	-	Part No. 215 383	-	Part No. 215 385	-	Part No. 215 386	-	Part No. 215 387
Spare parts								
Bellows feedthrough	Part No. 242 292	Part No. 242 292	Part No. 233 014	Part No. 233 014	Part No. 229 542	Part No. 229 542	Part No. 244 980	Part No. 244 980
Knob	Part No. 245 912	Part No. 245 912	Part No. 245 912	Part No. 245 912	Part No. 245 913	Part No. 245 913	Part No. 245 913	Part No. 245 913
Seal kit consisting of disc seal (O-ring) and head seal (O-ring)	Part No. 242 324	Part No. 242 324	Part No. 241 077	Part No. 241 077	Part No. 241 079	Part No. 241 079	Part No. 245 556	Part No. 245 556

Straight-Through Valves, Bellows-Sealed, Manually Operated

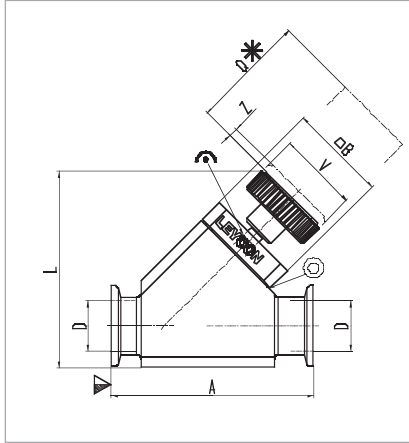

Dimensional drawing for the manually operated, bellows-sealed straight-through valves

Dimension Table

DN	ISO-KF	16	25	40	50
A	mm	87.6	100.0	130.0	178.0
B	mm	40	48	65	77
D	mm	16	25	40	50
L	mm	90.6	97.0	140.6	166.8
Q	mm	46.0	44.0	73.5	85.5
V	mm	40	40	60	60
Z ¹⁾	mm	3.6	4.7	7.9	9.3

¹⁾ Aluminum version

²⁾ Stainless steel version

³⁾ Disk stroke is greater due to the transmission

Advantages to the User

Valves with Rotary Knob

- Allow also for reduced venting of systems
- Suited as a manually operated variable leak valve to roughly control gas flows
- Leak tight in both directions up to a pressure of 2.0 etc. 1.5 bar and easy to open
- Installation in any orientation

Connection Icons

▽ Side of the valve seat

* Required clearance

⌚ Mechanical position indicator

⊕ Leak detection bore


Technical Data

		DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF
		Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum
Service life	cycles	20,000	20,000	20,000	20,000	20,000	20,000	20,000
Conductance at molecular flow	$l \times s^{-1}$	5	5	14	14	45	45	50
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}
Operating pressure range	mbar	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000
Differential pressure, closing and opening direction	bar	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2
Ambient / operating temperature, max.	°C	80	80	80	80	80	80	80
Seal		FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)
Weight	kg	0.32	0.74	0.49	0.47	1.30	1.16	2.19

Ordering Information

	DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF
	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum
Straight-Through Valve, rotary knob BAV ... M AL	Part No. 215 313	-	Part No. 215 388	-	Part No. 215 389	-	Part No. 215 390
	-	Part No. 215 379	-	Part No. 215 374	-	Part No. 215 381	-
Spare parts Bellows feedthrough	Part No. 242 292	Part No. 242 292	Part No. 233 014	Part No. 233 014	Part No. 229 542	Part No. 229 542	Part No. 244 980
	Part No. 245 912	Part No. 245 912	Part No. 245 912	Part No. 245 912	Part No. 245 913	Part No. 245 913	Part No. 245 913
Seal kit consisting of disc seal (O-ring) and head seal (O-ring)	Part No. 242 324	Part No. 242 324	Part No. 241 077	Part No. 241 077	Part No. 241 079	Part No. 241 079	Part No. 245 556

Right-Angle Valves, Bellows-Sealed, (Electro)pneumatically Operated

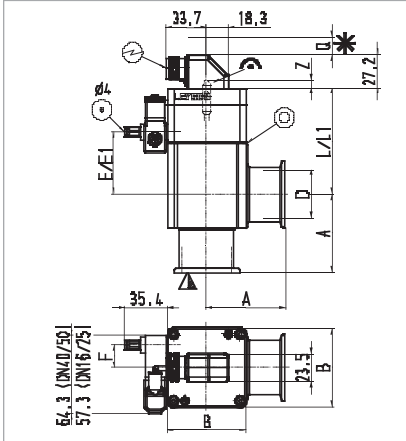

Dimensional drawing right-angle valves,
with fitted pilot valve







Dimension Table

DN	ISO-KF	16	25	40	50
A	mm	40	50	65	70
B	mm	40	48	65	77
D	mm	16	25	40	50
L ¹⁾	mm	65.2	60.6	87.7	96.0
L1 ²⁾	mm	67.7	64.0	90.7	99.0
Q	mm	46.0	44.0	73.5	85.5
F	mm	9	13	19	20
Z ¹⁾	mm	2.0	4.0	9.5	10.0
E	mm	35.6	30.6	51.6	58.4
E1	mm	38.1	34.0	54.6	61.4

¹⁾ Aluminum version

²⁾ Stainless steel version

Connection Icons

-  Side of the valve seat
-  Required clearance
-  Mechanical position indicator
-  Leak detection bore
-  Electrical connection
-  Compressed air connection

Advantages to the User

- Quiet opening and closing action with very little vibration
- Short opening and closing times
- Optical valve position indicator as standard
- Very low leak rate and insensitive to particles owing to bellows seal. Always closed in case the compressed air supply fails
- Electric position indicator is standard
- With and without pilot valve as standard
- Standard electrical and compressed air connections
- Protection class IP 50
- The valves are closed by the restoring force of a spring
- Installation in any orientation and no restrictions as to the direction of flow


Technical Data

		DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF	
		Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel
Service life	cycles	10 mio.	10 mio.	10 mio.	10 mio.	10 mio.	10 mio.	10 mio.	10 mio.
Conductance at molecular flow	$l \times s^{-1}$	5	5	14	14	45	45	80	80
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}
Operating pressure range	mbar	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000
Differential pressure. closing and opening direction	bar	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2
Ambient / Operating temperature, max.	°C	80	80	80	80	80	80	80	80
Seal		FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)
Closing time / opening time	ms	100 / 100	100 / 100	210 / 120	210 / 120	550 / 250	550 / 250	650 / 400	650 / 400
Switching frequency	1/min	100	100	100	100	100	100	50	50
Position indicator, switching capacity									
Voltage	V AC / V DC	≤ 50	≤ 50	≤ 50	≤ 50	≤ 50	≤ 50	≤ 50	≤ 50
Current	A	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
Power	W	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Control valve	V DC / W	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5
Compressed air, overpressure	bar	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8
Air cylinder, volume	cm ³	0.004	0.004	0.011	0.011	0.035	0.035	0.047	0.047
Compressed air connection	mm	4 and 6	4 and 6	4 and 6	4 and 6	4 and 6	4 and 6	4 and 6	4 and 6
Weight, with pilot valve	kg	0.24	0.30	0.36	0.47	0.92	1.08	1.34	1.52

Ordering Information

		DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF	
		Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel
Right-angle valves, bellows sealed									
BAV ... P AL	Part No.	215 315	-	215 316	-	215 317	-	215 318	-
BAV ... P SS	Part No.	-	215 335	-	215 336	-	215 337	-	215 338
BAV ... EP AL 24 V AC	Part No.	215 319	-	215 320	-	215 321	-	215 322	-
BAV ... EP SS 24 V AC	Part No.	-	215 339	-	215 340	-	215 341	-	215 342
BAV ... EP AL 24 V DC	Part No.	215 323	-	215 324	-	215 325	-	215 326	-
BAV ... EP SS 24 V DC	Part No.	-	215 347	-	215 348	-	215 349	-	215 350
BAV ... EP AL 115 V AC	Part No.	215 327	-	215 328	-	215 329	-	215 330	-
BAV ... EP SS 115 V AC	Part No.	-	215 351	-	215 352	-	215 353	-	215 354
BAV ... EP AL 230 V AC	Part No.	215 331	-	215 332	-	215 333	-	215 334	-
BAV ... EP SS 230 V AC	Part No.	-	215 343	-	215 344	-	215 345	-	215 346
Spare parts									
Bellows feedthrough	Part No.	242 292	242 292	233 014	233 014	229 542	229 542	244 980	244 980
Seal kit consisting of disc seal (O-ring) and head seal (O-ring)	Part No.	242 324	242 324	241 077	241 077	241 079	241 079	245 556	245 556

Straight-Through Valves, Bellows-Sealed, (Electro)pneumatically Operated

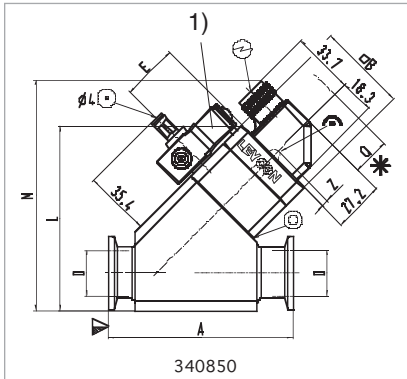







Dimensional drawing
for the straight-through valves
with fitted pilot valve (EP)
without pilot valve (P)
1) pilot valve

Dimension Table

DN	ISO-KF	16	25	40	50
A	mm	80	100	130	178
B	mm	40	48	65	77
D	mm	16	25	40	50
L	mm	91.5	100.3	140.9	170.1
Q	mm	46.0	44.0	73.5	85.5
E	mm	29.6	30.0	36.1	37.6
Z	mm	2.0	4.0	9.5	10.0
M	mm	120	125	160	185

Connection Icons

-  Side of the valve seat
-  Required clearance
-  Mechanical position indicator
-  Leak detection bore
-  Electrical connection
-  Compressed air connection


Advantages to the User

- Quiet opening and closing action with very little vibration
- Short opening and closing times
- Optical valve position indicator as standard
- Very low leak rate and insensitive to particles owing to bellows seal – thus always closed in case the compressed air supply fails
- Electric position indicator is standard
- With and without pilot valve as standard
- Protection class IP 50
- Standard electrical and compressed air connections
- The valves are closed by the restoring force of a spring

Technical Data		DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF
		Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum
Service life	cycles	10 mio.	10 mio.	10 mio.	10 mio.	10 mio.	10 mio.	10 mio.
Conductance at molecular flow	$l \times s^{-1}$	5	5	14	14	45	45	80
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}	1×10^{-9}
Operating pressure range	mbar	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000	10^{-8} - 5000
Differential pressure, closing and opening direction	bar	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2	5 / 2
Ambient / Operating temperature, max.	°C	80	80	80	80	80	80	80
Seal		FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)	FPM (FKM)
Closing time / opening time	ms	100 / 100	100 / 100	210 / 120	210 / 120	550 / 250	550 / 250	650 / 400
Switching frequency	1/min	100	100	100	100	100	100	100
Position indicator, switching capacity								
Voltage	V AC / V DC	≤ 50	≤ 50	≤ 50	≤ 50	≤ 50	≤ 50	≤ 50
Current	A	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
Power	W	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Pilot valve	V DC / W	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5	24 / 2.5
Compressed air, overpressure	bar	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8	4 to 8
Air cylinder, volume	cm ³	0.004	0.004	0.011	0.011	0.035	0.035	0.047
Compressed air connection	mm	4 and 6	4 and 6	4 and 6	4 and 6	4 and 6	4 and 6	4 and 6
Weight, with pilot valve	kg	0.32	0.74	0.49	0.47	1.30	1.16	2.19

Ordering Information		DN 16 ISO-KF		DN 25 ISO-KF		DN 40 ISO-KF		DN 50 ISO-KF
		Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum	Stainl. Steel	Aluminum
Straight-through valve, bellows sealed								
BIV ... P SS		-	Part No. 215 355	-	Part No. 215 356	-	Part No. 215 357	-
BIV ... EP SS 24 V AC		-	Part No. 215 359	-	Part No. 215 360	-	Part No. 215 361	-
BIV ... EP AL 24 V DC		Part No. 215 314	-	Part No. 215 391	-	Part No. 215 392	-	Part No. 215 393
BIV ... EP SS 24 V DC		-	Part No. 215 367	-	Part No. 215 368	-	Part No. 215 369	-
BIV ... EP SS 115 V AC		-	Part No. 215 371	-	Part No. 215 372	-	Part No. 215 373	-
BIV ... EP SS 230 V AC		-	Part No. 215 363	-	Part No. 215 364	-	Part No. 215 365	-
Spare parts								
Bellows feedthrough		Part No. 242 292	Part No. 242 292	Part No. 233 014	Part No. 233 014	Part No. 229 542	Part No. 229 542	Part No. 244 980
Seal kit consisting of disc seal (O-ring) and head seal (O-ring)		Part No. 242 324	Part No. 242 324	Part No. 241 077	Part No. 241 077	Part No. 241 079	Part No. 241 079	Part No. 245 556

Right-Angle Valves, Bellows-Sealed, Electromagnetically Operated

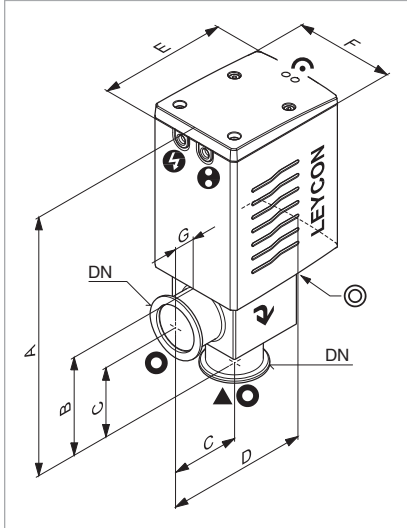

Dimensional drawing for the bellows-sealed right-angle valves

Dimension Table

DN	ISO-KF	16	25	40
A	mm	170.9	193.0	246.0
B	mm	51.4	64.9	92.9
C	mm	40	50	65
D	mm	96.0	112.7	139.0
E	mm	86.0	97.3	119.5
F	mm	59	70	90
G	mm	10.0	15.4	19.5

Electromagnetic valves are particularly well suited for vacuum systems in which the valves need to be remotely controlled and where compressed air is not readily available.

Connection Icons

- Protection cap
- ▼ Side of the valve seat
- ⚡ Required clearance
- ⊕ Position sensor connection
- ↻ Flow direction
- ⊙ Leak detection bore
- ⦿ Position indicator

Advantages to the User

- Selectable operating mode:
 - Remote control via programmable control or personal computer
 - direct operation by switching the supply voltage on and off
- Well visible, unambiguous optical position indicator: open (green LED) and closed (red LED)
- Integrated electrically floating position indicator (opto-coupler for 24 V DC)
- Optical overload indicator (red flashing LED)
- Protection class IP 54
- Spring action closure, thus closed when the power fails
- Low operating temperature
- Inverting operation of the remote control logic
- Installation in any orientation and no restrictions as to the direction of flow


Technical Data**DN 16 ISO-KF****DN 25 ISO-KF****DN 40 ISO-KF**

Service life	cycles	2 mio.	2 mio.	2 mio.
Conductance at molecular flow	$l \times s^{-1}$	4	16	40
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}	1×10^{-9}	1×10^{-9}
Operating pressure range	mbar	10^{-8} - 1300	10^{-8} - 1300	10^{-8} - 1300
Differential pressure, closing and opening direction	bar	1.3	1.3	1.3
Ambient / operating temperature, max.	°C	50	50	50
Opening / closing time	ms	100 / 240	120 / 240	230 / 700
Switching frequency at ambient temperature	1/min °C	30, 20 40, 50	30, 20 40, 50	30, 20 40, 50
Switch-off delay	ms	50	170	500
Rating for the valve position indicator	V DC / mA	15 - 30 / 100	15 - 30 / 100	15 - 30 / 100
Power consumption, max.	W	400	400	400
Actuation and holding current	A	5.2 / 0.7	5.3 / 0.7	4.8 / 0.7
Supply voltage, max.	V AC	90 - 264	90 - 264	90 - 264
Frequency	Hz	50/60	50/60	50/60
Protection class		54	54	54
Weight				
Aluminum body	kg	1.3	2.2	4.0
Stainless steel body	kg	1.5	2.9	5.4

Ordering Information**DN 16 ISO-KF****DN 25 ISO-KF****DN 40 ISO-KF**

Right-angle valve, bellows-sealed, electromagnetic actuator, microprocessor controlled BAV ... EM AL 240 V AC BAV ... EM SS 240 V AC	Part No. 215 004 Part No. 215 006	Part No. 215 064 Part No. 215 079	Part No. 215 124 Part No. 215 134
Spare parts Seal kit Bellows feedthrough	Part No. EK 299 001 Part No. EK 299 002	Part No. EK 299 006 Part No. EK 299 007	Part No. EK 299 011 Part No. EK 299 012

Valves with ISO-K Flanges Overview

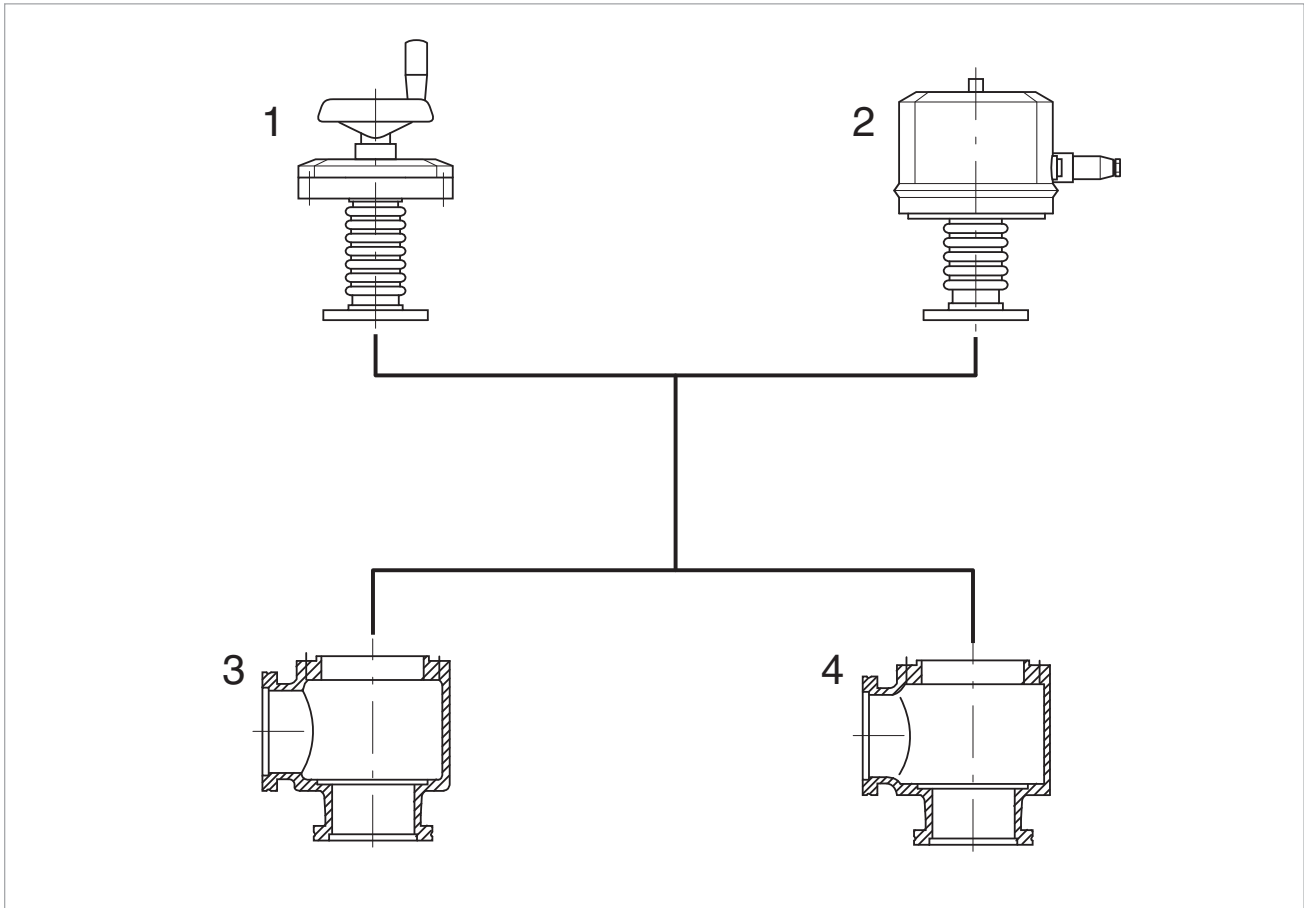

Oerlikon Leybold Vacuum valves with ISO-K flanges are available with any of two drives and either of two bodies.

Types of drive

- Handwheel (1)
- Electropneumatic drive, bellows-sealed (2)

Body types

- Right-angle valve with aluminum body (3)
- Right-angle valve with stainless steel body (4)

From DN 63 ISO-K only right-angle valves are available.

Nominal widths DN 63 ISO-K and DN 100 ISO-K are available in aluminum and stainless steel, DN 160 ISO-K in aluminum only.


Advantages to the User

- Full exchangeability of the subassemblies
- Three types of drive
- Two body options
- Standard nominal widths to DIN 28 404 and ISO 1609
- Simplified stocking of spare parts

Connection Pictograms

- Position indicator connection
- ⓘ Compressed air connection
- ⚡ Power connection
- Position indicator

Right-Angle Valves, Bellows-Sealed, Manually Operated

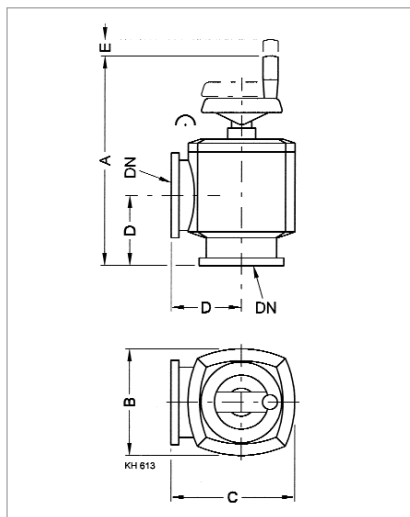

Dimensional drawing for the right-angle valves, bellows-sealed, manually operated

These universal valves are ideal especially for smaller systems, where remote control is not essential. They may be also installed in larger systems, where backing pumps or condensate separators or similar units are to be cut off at longer intervals for maintenance purposes by maintenance personnel.

Dimension Table

DN	ISO-K	63	100
A	mm	266	320
B	mm	124	164
C	mm	150	190
D	mm	88	108
E	mm	20	25

Advantages to the User

- Gentle venting of systems
- Seal in both directions up to a pressure difference of 1.5 bar
- Easy manual operation, for an effortless vacuum-tight seal
- May also be used as a variable leak valve to roughly control gas flows
- Installation in any orientation and no restrictions as to the direction of flow

Technical Data

DN 63 ISO-K

DN 100 ISO-K

Service life	cycles	10.000	10.000
Conductance at molecular flow	$l \times s^{-1}$	140	330
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}	1×10^{-9}
Operating pressure range	mbar	$10^{-8} - 1500$	$10^{-8} - 1500$
Differential pressure, closing and opening direction	bar	1.5	1.5
Opening against differential pressure at the valve disk	bar	1.5	1.5
Ambient / Operating temperature, max.	°C	60	60
Seal		FPM (FKM)	FPM (FKM)
Weight			
Aluminum body	kg	3.6	6.1
Stainless steel body	kg	6.5	11.1
Material			
Valve body		aluminum alloy (3.2373.63) or stainless steel (1.4305)	aluminum alloy (3.2373.63) or stainless steel (1.4305)
Inside section		stainless steel (1.4541/1.4301)	stainless steel (1.4541/1.4301)
Lid		grey cast iron (GG 20)	grey cast iron (GG 20)
Gaskets		O-rings made of FPM (FKM)	O-rings made of FPM (FKM)


Ordering Information

DN 63 ISO-K

DN 100 ISO-K

Right-angle valve, bellows-sealed, manually operated		
Aluminum body	Part No. 107 80	Part No. 107 81
Stainless steel body	Part No. 107 83	Part No. 107 84
Spare parts		
Seal kit	Part No. 215 251	Part No. 215 271
Inside section	Part No. 215 254	Part No. 215 274

Right-Angle Valves, Bellows-Sealed, Electropneumatically Operated

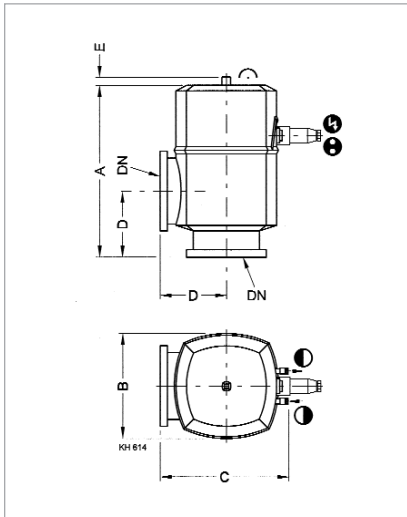

Dimensional drawing for the electropneumatically actuated right-angle valves

Electropneumatically actuated right-angle valves are used in automated vacuum systems which need to be controlled electrically.

Dimension Table

DN	ISO-K	63	100	160
A	mm	250	282	366
B	mm	130	170	221
C	mm	168	208	264
D	mm	88	108	138
E	mm	14	14	14
●	mm	6	6	6

Advantages to the User

- Pneumatic or electropneumatic opening
- Short opening and closing times
- Optical position indicator
- Electric position indicator
- With and without pilot valve IP 54
- Protection class IP 54
- The valves are closed by the restoring force of a spring
- Installation in any orientation and no restrictions as to the direction of flow


Technical Data**DN 63 ISO-K****DN 100 ISO-K****DN 160 ISO-K**

Service life, cycles	Million	1.5	1.5	1.5
Conductance for molecular flow	$l \times s^{-1}$	140	330	800
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}	1×10^{-9}	1×10^{-9}
Operating pressure range	mbar	$1 \times 10^{-8} - 1500$	$1 \times 10^{-8} - 1500$	$1 \times 10^{-8} - 1500$
Differential pressure, closing and opening direction	bar	1.5	1.5	1.5
Opening against differential pressure at the valve disk	bar	1.5	1.5	1.5
Ambient / operating temperature, max.	°C	60	60	60
Seal		FPM (FKM)	FPM (FKM)	FPM (FKM)
Closing time / opening time	ms	250 / 300	300 / 450	550 / 450
Switching frequency	1/min	60	60	40
Position indicator, rating	V AC / A V DC / A	250 / 0.125 50 / 0.25	250 / 0.125 50 / 0.25	250 / 0.125 50 / 0.25
Compressed air, overpressure	bar	4 to 8	4 to 8	4 to 8
Compressed air volume	cm ³	75	195	570
Compressed air connection	mm	6	6	6
Weight with pilot valve				
Aluminum housing	kg	4.0	6.7	11.4
Stainless steel housing	kg	6.8	11.7	-

Ordering Information**DN 63 ISO-K****DN 100 ISO-K****DN 160 ISO-K**

Right-angle valve, bellows-sealed, electropneumatic drive without solenoid coil Aluminum body Stainless steel body	Part No. 107 90 Part No. 107 93	Part No. 107 91 Part No. 107 94	Part No. 107 92 -
Valve with pilot valve 24 V DC Aluminum body Stainless steel body	Part No. 108 00 Part No. 108 10	Part No. 108 01 Part No. 108 11	Part No. 108 02 -
Valve with pilot valve 24 V AC Aluminum body Stainless steel body	Part No. 108 03 Part No. 108 13	Part No. 108 04 Part No. 108 14	Part No. 108 05 -
Valve with pilot valve 100 - 115 V AC Aluminum body Stainless steel body	Part No. 108 20 -	Part No. 108 21 -	Part No. 108 22 -
Valve with pilot valve 200 - 240 V AC Aluminum body Stainless steel body	Part No. 108 25 Part No. 108 35	Part No. 108 26 Part No. 108 36	Part No. 108 27 -
Pilot valve 24 V DC 24 V AC 200 - 240 V AC	Part No. 215 301 Part No. 215 300 Part No. 215 302	Part No. 215 301 Part No. 215 300 Part No. 215 302	Part No. 215 311 Part No. 215 310 Part No. 215 312
Spare parts Seal kit Inside section	Part No. 215 251 Part No. 215 253	Part No. 215 271 Part No. 215 273	Part No. 215 291 Part No. 215 293

Right-Angle Valves, Bellows-Sealed, Electropneumatically Operated

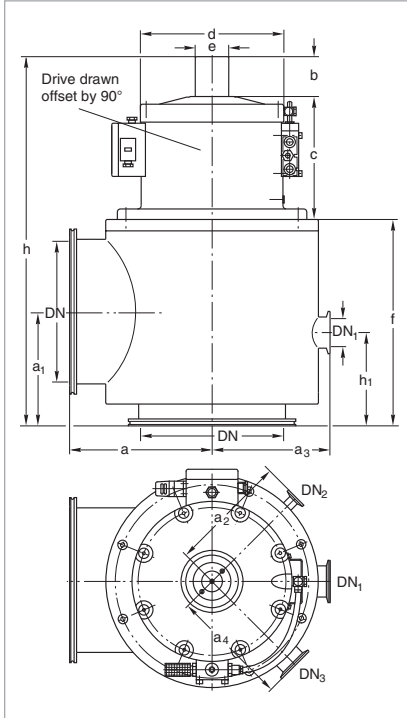

Dimensional drawing for the right-angle valves with bellows

Right-angle valves of this size are used, for example in metallurgy, large coaters, in the area of space simulation.

Dimension Table

	DN	250 ISO-K
DN	mm	261
h, ca.	mm	650
a	mm	250
a ₁	mm	200
a ₂ , a ₄	mm	208
a ₃	mm	205
h ₁	mm	163
DN ₁ , for bypass 1		50 ISO-KF
DN ₂ , for bypass 2		40 ISO-KF
DN ₃ , for meas. conn.		16 ISO-KF
b	mm	69.5
c	mm	218
d	mm	250
e	mm	58
f	mm	363
Travel	mm	62.5
Travel/DN ¹⁾	mm	1/4

¹⁾ For example travel = 1/4 DN

Advantages to the User

- No vibrations when the valve open or closes
- Low leak rate ($< 10^{-9}$ mbar x l x s⁻¹) – drive system basically insensitive to particles
- Non-contact valve position indicator for reliable indication of the valve's position (open/closed)
- Wide range of different solenoid coils for all commonly used control voltages
- Additional flange for bypass lines and for connecting vacuum gauges (see Product Section C16 "Total Pressure Gauges")

Technical Data

DN 250 ISO-K

Service life, vertical	cycles, approx.	1 x 10 ⁶
Conductance at molecular flow	l x s ⁻¹	2700
Leak rate	mbar x l x s ⁻¹	1 x 10 ⁻⁹
Opening / closing time, at 6 bar compr. air pressure	s	6 / 6
Compressed air, overpressure	bar	4 to 8
Hose diameter	mm	6 x 1
Compressed air cylinder, volume	cm ³	2100
Max. ambient temperature	°C	40
Weight	kg	66
Supply voltage	V	Various voltages are possible; see section "Special Valves with ISO-KF / ISO-K / CF Flanges", para. "Accessories for the Electropneumatically Operated Valves", product "Solenoid Coils"
Material		
Body, valve disk		stainless steel
Drive / Compressed air cylinder		aluminum / cast aluminum (3.2153)
Piston rod, Intermediate flange		stainless steel (1.4305)
Gaskets		FPM (FKM)
Lid		aluminum (3.2341)
Hood		plastic (PA 6)

Ordering Information

DN 250 ISO-K

Right-angle valve, bellows-sealed, electropneumatic drive without solenoid coil Stainless steel body	Part No. 281 84
Solenoid coil for various supply voltages	X
Interference suppression kits for different voltages	Y
Spare parts Seal kit Inside section	Part No. ES 105 65 Part No. ES 105 75

X = Part Nos. see section "Special Valves with ISO-KF / ISO-K / CF Flanges",
para. "Accessories for the Electropneumatically Operated Valves", product "Solenoid Coil"
Y = Part Nos. see section "Special Valves with ISO-KF / ISO-K / CF Flanges",
para. "Accessories for the Electropneumatically Operated Valves", product "Pilot Valves"

Special Valves with ISO-KF/ISO-K/CF Flange

Overview



Oerlikon Leybold Vacuum offers a range of special valves for a variety of different applications and to meet special design requirements of customers.


Among these are:

- SECUVAC vacuum safety valves (DN 16 ISO-KF to DN 100 ISO-K) **1**
- Venting Valves **2**
- Power failure venting valves **3**
- Vacuum Locks **4**


- Sealing Valves **4**
- Variable leak valves **5**
- Ball Valves **6**
- Right-angle valves for mobile systems in accordance with the American standard of the Department of Transportation (DOT) **7**

These valves ideally supplement our range of ISO-KF and ISO-K valves.

SECUVAC Vacuum Safety Valves

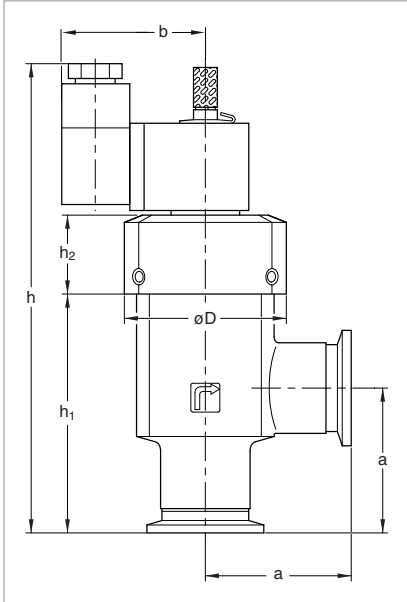

Dimensional drawing for the SECUVAC valves with ISO-KF small flanges

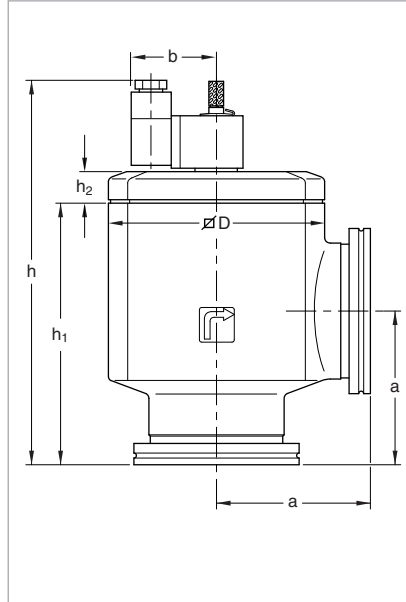

Dimensional drawing for the SECUVAC valves with ISO-K clamp flanges

These solenoid right-angle valves were specially developed for use with rotary vacuum pumps which are not equipped with a built-in anti-suckback valve. The SECUVAC safety valve protects the vacuum system against unplanned venting via the backing pump in case of a power failure **and** it ensures that the vacuum system remains sealed until the backing pump, after it has restarted, has evacuated the connecting lines.

Dimension Table Special Valves (ISO-KF)

	DN	16 ISO-KF	25 ISO-KF	40 ISO-KF
a	mm	40	50	65
b	mm	49	49	49
D	mm	44	56	82
h	mm	138.6	161.8	178.3
h₁	mm	62.3	82.5	100.0
h₂	mm	24	27	26

Advantages to the User

Two valve functions in one:

- Fast-closing high vacuum isolation valve for separating the vacuum chamber or a vapor jet pump (a diffusion pump, for example) from the backing pump
- Venting valve for venting of the valve's chamber and thus the pump (backing pump)
- Immediate closing action upon power failure
- Opening action only after the intake line has been evacuated
- Delayed isolation of the vacuum chamber and venting the vacuum pump (negligible "gulp")

Dimension Table Special Valves (ISO-K)

	DN	63 ISO-K	100 ISO-K
a	mm	88	108
b	mm	49	49
D	mm	124	164
h	mm	220.5	263.5
h₁	mm	150	175
h₂	mm	18.2	36.2

Typical Applications

- Safety isolation valve between backing pump and vacuum chamber or vapor jet pumps (protection of the vacuum chamber against venting in the event of a power failure)

Technical Data**DN 16 ISO-KF****SECUVAC Valve
DN 25 ISO-KF****DN 40 ISO-KF**

Conductance at molecular flow	$l \times s^{-1}$	3.8	11.0	30.5
Current consumption DC	W	2.5	2.5	2.5
Actuation / holding AC	VA	5.0 / 3.7	5.0 / 3.7	5.0 / 3.7
Leak tightness, body	$mbar \times l \times s^{-1}$	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$
Leak tightness, valve disk	$mbar \times l \times s^{-1}$	$< 1 \times 10^{-5}$	$< 1 \times 10^{-5}$	$< 1 \times 10^{-5}$
Installation orientation		any	any	any
Operating pressure range	mbar	$1 \times 10^{-8} - 1000$	$1 \times 10^{-8} - 1000$	$1 \times 10^{-8} - 1000$
Differential pressure for opening	mbar	150	150	150
for closing	mbar	150	150	150
Opening time	s	< 15	< 15	< 15
Closing time / reaction time	ms	< 100 / < 50	< 100 / < 50	< 100 / < 50
Ambient temperature	°C	+5 to +50	+5 to +50	+5 to +50
Protection	IP	65	65	65
Weight	kg	0.3	0.5	0.9
Material Body Gaskets		aluminum FPM (FKM)	aluminum FPM (FKM)	aluminum FPM (FKM)

Technical Data**DN 63 ISO-K****SECUVAC Valve****DN 100 ISO-K**

Conductance at molecular flow	$l \times s^{-1}$	126	300
Current consumption DC	W	2.5	2.5
Actuation / holding AC	VA	5.0 / 3.7	5.0 / 3.7
Leak tightness, body	$mbar \times l \times s^{-1}$	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$
Leak tightness, valve disk	$mbar \times l \times s^{-1}$	$< 1 \times 10^{-5}$	$< 1 \times 10^{-5}$
Installation orientation		any	any
Operating pressure range	mbar	$1 \times 10^{-8} - 1000$	$1 \times 10^{-8} - 1000$
Differential pressure for opening	mbar	150	150
for closing	mbar	150	150
Opening time	s	< 30	< 30
Closing time / reaction time	ms	< 100 / < 50	< 100 / < 50
Ambient temperature	°C	5 to 50	5 to 50
Protection	IP	65	65
Weight	kg	2.4	5.1
Material Body Gaskets		aluminum FPM (FKM)	aluminum FPM (FKM)


Ordering Information

	DN 16 ISO-KF	SECUVAC Valve DN 25 ISO-KF	DN 40 ISO-KF
SECUVAC valve			
24 V DC	Part No. 215 015	Part No. 215 065	Part No. 215 135
100 - 115 V AC	Part No. 215 016	Part No. 215 066	Part No. 215 136
200 - 230 V AC	Part No. 215 017	Part No. 215 067	Part No. 215 137
Spare parts			
Seal kit	Part No. E 105 02	Part No. E 105 04	Part E No. 105 05
Solenoid coils for SECUVAC valves and power failure venting valves			
24 V DC	Part No. E 215 242	Part No. E 215 242	Part No. E 215 242
100 - 115 V AC / 50/60 Hz	Part No. E 215 241	Part No. E 215 241	Part No. E 215 241
200 - 230 V AC / 50/60 Hz	Part No. E 215 240	Part No. E 215 240	Part No. E 215 240
Filter for SECUVAC valves and power failure venting valves (set of 5 pcs.)	Part No. 215 701	Part No. 215 701	Part No. 215 701

Ordering Information

	DN 63 ISO-K	SECUVAC Valve DN 100 ISO-K
SECUVAC valve		
24 V DC	Part No. 215 205	Part No. 215 225
100 - 115 V AC	Part No. 215 206	Part No. 215 226
200 - 230 V AC	Part No. 215 207	Part No. 215 227
Spare parts		
Seal kit	Part No. E 105 07	Part No. E 105 08
Solenoid coils for SECUVAC valves and power failure venting valves		
24 V DC	Part No. E 215 242	Part No. E 215 242
100 - 115 V AC / 50/60 Hz	Part No. E 215 241	Part No. E 215 241
200 - 230 V AC / 50/60 Hz	Part No. E 215 240	Part No. E 215 240
Filter for SECUVAC valves and power failure venting valves (set of 5 pcs.)	Part No. 215 701	Part No. 215 701

Interference Suppression Kit - Illuminated

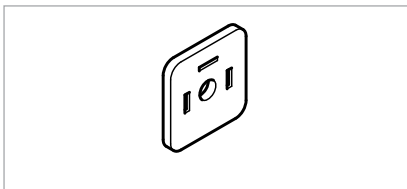


As an option for the solenoid coil, an interference suppression kit is offered which reliably prevents any interferences from affecting other equipment operating in the vicinity.

Ordering Information

	Interference Suppression Kit
Interference suppression kit	
24 V DC	Part No. 104 96
110 - 230 V AC	Part No. 104 95

Safety Valve

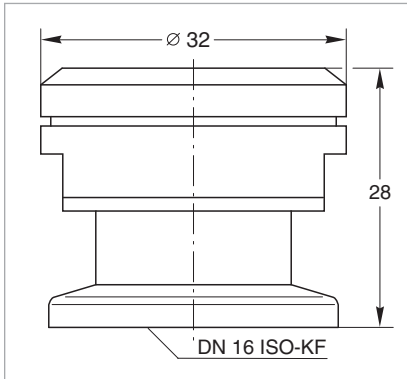

Dimensional drawing for the safety valve

Typical Applications

- Protecting sealed vacuum systems like cryopumps, cryostats, lifting devices, for example against internal overpressures
- Mandatory for systems which are separated when cold, as a means of protection against overpressures

Technical Data

Safety Valve


Responding pressure	mbar	150 ±40, over-pressure
Flow at 140 mbar	l x h ⁻¹	500
Valve disk		Spring loaded, with O-ring seal
Leak rate in the closed state mbar x l x s ⁻¹ (Torr x l x s ⁻¹)		< 1 x 10 ⁻⁸ (< 0.75 x 10 ⁻⁸)
Connection	DN	16 ISO-KF
Diameter	mm	32
Overall height	mm	28
Weight	kg	0.3

Ordering Information

Safety Valve

Safety valve on DN 16 ISO-KF flange	Part No. 890 39
-------------------------------------	------------------------

Power Failure Venting Valves, Electromagnetically Actuated

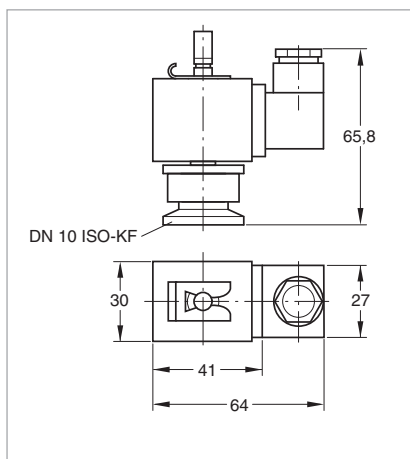

Dimensional drawing for the power failure venting valve

Power failure venting valves are open when de-energised and are used to automatically vent pumps, systems or vacuum vessels in the event of a power failure.

Permissible pressure difference < 2.5 bar (0 bar on the vacuum side).

Advantages to the User

- Can be installed in any orientation
- Protection against being contaminated by filtering of the inflowing air
- Easy to install
- Simple filter exchange

Technical Data

Power Failure Venting Valves electromagnetically actuated

Leak tightness	mbar x l x s ⁻¹	< 1 x 10 ⁻⁷
Venting time for a 50 l vessel	s	270
Opening time / closing time ¹⁾	ms	30 / 30
Protection class to DIN 40 050	IP	65
Permissible ambient temperature	°C	50
Weight	kg	0.1
Dimensions (W x H x D)	mm	64 x 66 x 30
Material		
Body		aluminum
Seal		NBR
Armature		brass
Filter		bronze


Ordering Information

Power Failure Venting Valves electromagnetically actuated

Power failure venting valve DN 10 ISO-KF, electromagnetically actuated, with inlet filter 230 V / 50/60 Hz 24 V DC	Part No. 174 26 Part No. 174 46
Centering ring DN 10 ISO-KF with sinter filter	Part No. 883 50
Spare solenoid valves	see SECUVAC valves
Filter for SECUVAC valves and power failure venting valves (set of 5 pcs.)	Part No. 215 701

¹⁾ at a differential pressure of = 0 bar

Coarse Variable Leak Valve without Isolation Valve

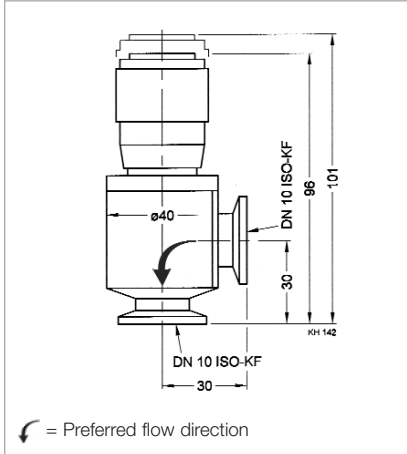


Dimensional drawing for the coarse variable leak valve without isolation valve

With coarse variable leak valves without isolation valve precisely defined quantities of gas may be admitted within a controllable period of time into evacuated vessels.

Applications

- Gas admission rates of 40 to 1700 mbar x l x s⁻¹ allow coarse variable leak valves to be used in almost all applications

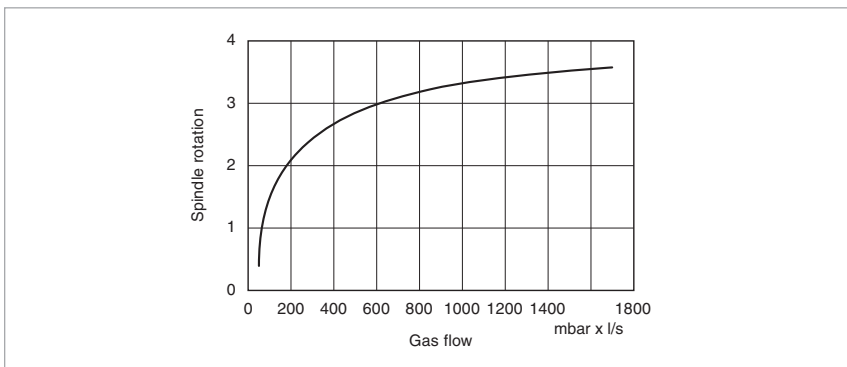

Variable leak characteristic for the coarse variable leak valve without isolation valve

Technical Data

Coarse Variable Leak Valve without Isolation Valve


Gas flow controllable	mbar x l x s ⁻¹	40 - 1700
Tightness	mbar x l x s ⁻¹	1 x 10 ⁻⁹
Differential pressure	bar	3
Operating temperature	°C	100
Material (housing / valve disk)		aluminum / stainless steel
Seal		FPM (FKM)
Weight	kg	0.2

Ordering Information

Coarse Variable Leak Valve without Isolation Valve

Coarse variable leak valve without isolation valve, DN 10 ISO-KF	Part No. 215 020
--	-------------------------

Variable Leak Valve with Isolation Valve

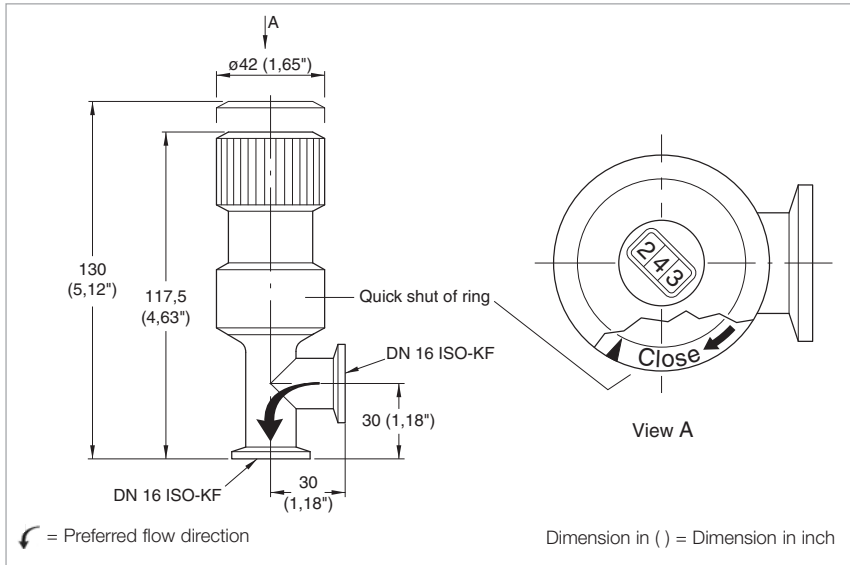

Dimensional drawing for the variable leak valve with isolation valve


Variable leak valves with a isolation valve permit an interruption of the gas supply without changing the gas admission rate setting.

Applications

- Gas admission rates of 1000 to $5 \times 10^{-6} \text{ mbar} \times \text{l} \times \text{s}^{-1}$ allow variable leak valves to be used in almost all applications
- Through the integrated digital display, the opening point may be accurately set at any time or a certain gas flow may be defined
- Blocking valve

Technical Note

When using helium as the process gas, it must be taken into account that the needle sleeve made of modified PTFE is to a certain extent permeable to helium.

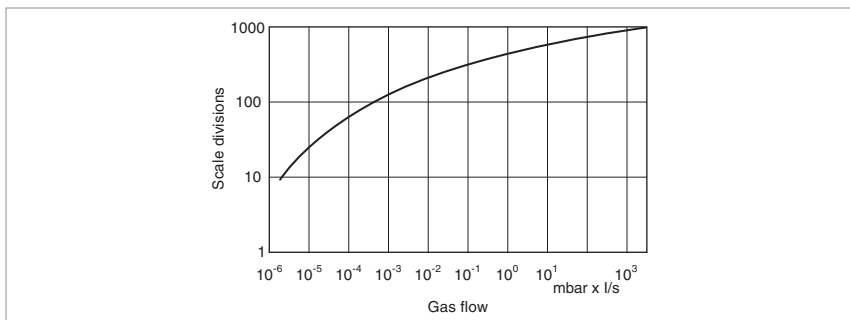

Variable leak characteristic for the variable leak valve with isolation valve

Technical Data

Variable Leak Valve with Isolation Valve


Gas flow controllable	$\text{mbar} \times \text{l} \times \text{s}^{-1}$	$5 \times 10^{-6} - 1000$
Tightness	$\text{mbar} \times \text{l} \times \text{s}^{-1}$	1×10^{-9}
Differential pressure	bar	2.5
Dead volume	cm^3	0.032
Operating temperature	$^{\circ}\text{C}$	80
Bakeout temperature, flanges	$^{\circ}\text{C}$	150
Material (housing, needle, filter)		stainless steel
Material (needle sleeve)		fluorplastomer
Seal		FPM (FKM)
Weight	kg	0.4

Ordering Information

Variable Leak Valve with Isolation Valve

Variable leak valve with isolation valve, DN 16 ISO-KF	Part No. 215 010
--	-------------------------

Venting Valves, Manually Operated

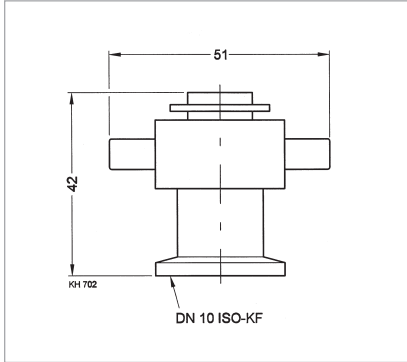

Dimensional drawing for the venting valve, manually operated

Venting valves are used to vent small vacuum systems.

Advantages to the User

- Simple opening and closing of the valve by loosening or tightening the screw cap

Technical Data

Venting Valve manually operated


Tightness	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹
Weight	kg	0.15
Dimensions (W x H x D)	mm	51 x 42 x 30
Material		
Body		aluminum (3.0615), stainless steel (1.4301)
Inside section		aluminum (3.0615), stainless steel (1.4301)
Seal		FPM (FKM)
Screw cap		brass (nickel-plated)

Ordering Information

Venting Valve manually operated

Venting valve DN 10 ISO-KF, manually operated (screw cap)	
Aluminum	Part No. 173 24
Stainless steel	Part No. 173 37

Venting Valves, Electromagnetically Actuated

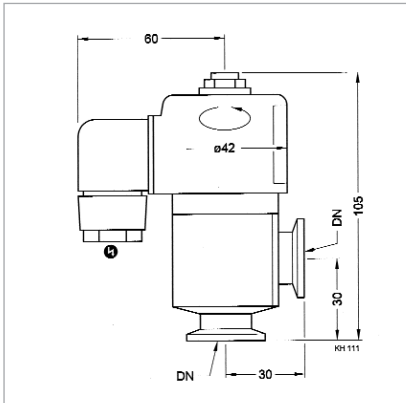

Dimensional drawing for the venting valve, electromagnetically actuated

Venting valves are used to vent small vacuum systems and are closed when no power is applied.

Advantages to the User

- Open when power is applied, closed with no power
- Seals on one side against atmospheric pressure
- Protected against dirt by a filter

Technical Data

Venting Valve electromagnetically actuated


Leak rate	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹
Venting time for a 100 l chamber	s	23
Mains connection	V / Hz V / Hz V DC	230 / 50/60 115 / 50/60 24
Power consumption, actuation / holding	VA	35 / 15
Differential pressure in closing / opening direction	bar	10 / 1
Can be opened to a pressure difference of	bar	2
Service life	cycles	1.5 Mio.
Switching frequency	1/min	50
Opening / closing time	ms	60 / 45
Conductance for molecular flow	l x s ⁻¹	1
Weight	kg	0.46
Dimensions (W x H x D)	mm	105 x 120 x 42
Material		
Valve body		aluminum
Gasket		FPM (FKM)

Ordering Information

Venting Valve electromagnetically actuated

Venting valve DN 10 ISO-KF, electromagnetically actuated 24 V DC 115 V AC 230 V AC	Part No. 215 021 Part No. 215 023 Part No. 215 024
Spare coil for 24 V DC for 230 V AC	Part No. 215 011 Part No. 215 014
Centering ring with sintered metal filter, DN 10 ISO-KF	Part No. 883 50
Seal kit	Part No. 215 208

Vacuum Locks and Sealing Valves

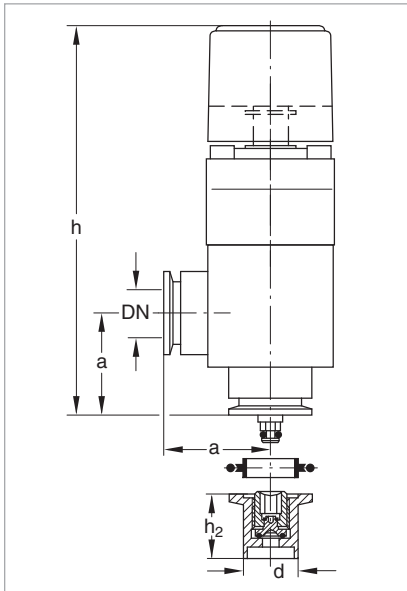

Dimensional drawing for the sealing valves

Dimension Table

	DN	16 ISO-KF	25 ISO-KF	40 ISO-KF
a	mm	40	50	65
d	mm	16	25	38
h	mm	124	160	190
h₂	mm	30	30	40

A screw-in sealing element with a hex. socket into which the spindle of the gas lock is inserted for actuation has been integrated within the tubulation.

After having filled in the gas or evacuated the chamber, the gas lock is detached from the small flange and may thus be reused for an unlimited number of times on other sealing valves.

Advantages to the User

- Simple to use, handy knob
- Compact, low weight
- Also well-suited for operating older types of sealing valves from Oerlikon Leybold Vacuum
- Long travel and high conductance, thus short pumpdown times
- Spindle can be arrested in its end position
- Double O-ring seal offering a very low leak rate ($< 1 \times 10^{-7}$ mbar $\times l \times s^{-1}$) and a long service life

- May be used in the entire rough and medium vacuum range
- Long service life
- Secured against inadvertent opening
- Temperature resistant

Vacuum lock	60 °C
Blocking valve	100 °C
- May be protected by a standard blank flange against becoming dirty

Typical Applications

- Sealing of evacuated or gas-filled chambers
- Post-evacuation of vessels
- Topping up and exchanging the gas filling in vessels
- Sealing valves with stainless steel ISO-KF connection and stainless steel tubulation for welding to the chamber


Technical Data**Vacuum Lock / Sealing Valve**

		DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF
Leak rate				
Sealing valve	mbar x l x s ⁻¹	1 x 10 ⁻⁷	1 x 10 ⁻⁷	1 x 10 ⁻⁷
Vacuum lock	mbar x l x s ⁻¹	1 x 10 ⁻⁹	1 x 10 ⁻⁹	1 x 10 ⁻⁹
Travel for the vacuum lock	mm	56	76	108
Free passage in the sealing valve	mm	3	8	18
Absolute pressure	bar	2.5	2.5	2.5
Weight				
Vacuum lock	kg	0.5	1.0	1.8
Sealing valve	kg	0.04	0.1	0.12
Material				
Vacuum lock		aluminum	aluminum	aluminum
Seal		FPM (FKM)	FPM (FKM)	FPM (FKM)

Ordering Information**Vacuum Lock / Sealing Valve**

	DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF
Vacuum lock, aluminum body	Part No. 283 25	Part No. 283 26	Part No. 283 27
Sealing valve with tubulation, stainless steel body	Part No. 283 21	Part No. 283 22	Part No. 283 23
Clamping ring	Part No. 183 41	Part No. 183 42	Part No. 183 43
Centering ring	Part No. 883 46	Part No. 883 47	Part No. 883 48
Repair kit			
Vacuum lock	Part No. 215 055	Part No. 215 056	Part No. 215 057
Sealing valve	Part No. 107 70	Part No. 107 71	Part No. 107 72

Ball Valves

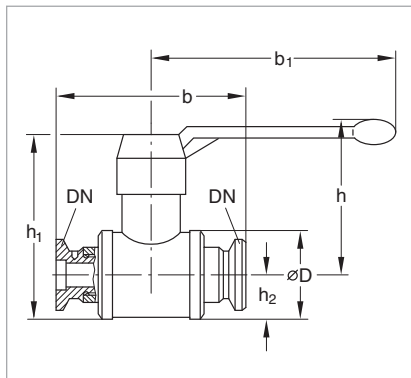

Dimensional drawing for the ball valves

Dimension Table

	DN	10 ISO-KF	16 ISO-KF	25 ISO-KF	40 ISO-KF
b	mm	75	100	130	160
b₁	mm	80	80	110	138
h	mm	55	55	62	90
h₁	mm	55	58	80	110
h₂	mm	15.0	15.0	20.0	27.5
D	mm	26	30	42	60

Ball valves are rugged and cost-effective straight-through valves of small size, which are opened or closed simply by operating a lever. The valve position (OPEN/CLOSED) can be determined from the lever's position. The lever may be detached.

Ball valves are provided with lubricated gaskets and when open they permit an unobstructed passage.

Advantages to the User

- Leak tight on both sides against the atmosphere; can be opened against atmospheric pressure

Technical Data

Ball Valve


		DN 10 ISO-KF	DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF
Leak rate	mbar x l x s ⁻¹	< 1 x 10 ⁻⁶	< 1 x 10 ⁻⁶	< 1 x 10 ⁻⁶	< 1 x 10 ⁻⁶
Conductance for molecular flow	l x s ⁻¹	1.5	3	9	30
Pressure absolute, min. / max.	mbar / bar	10 ⁻⁵ / 5	10 ⁻⁵ / 5	10 ⁻⁵ / 5	10 ⁻⁵ / 5
Weight	kg	0.35	0.4	0.75	2.6
Material					
Body		brass (nickel-plated)	brass (nickel-plated)	brass (nickel-plated)	brass (nickel-plated)
Gaskets		PTFE	PTFE	PTFE	PTFE
Ball		brass (hard chromium-plated)	brass (hard chromium-plated)	brass (hard chromium-plated)	brass (hard chromium-plated)
ISO-KF flanges		aluminum (3.0615)	aluminum (3.0615)	aluminum (3.0615)	aluminum (3.0615)

Ordering Information

Ball Valve

	DN 10 ISO-KF	DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF
Ball valve Brass body (nickel-plated)	Part No. 174 94	Part No. 174 95	Part No. 174 96	Part No. 174 97

Right-Angle Valve for Mobile Systems according to DOT (Departement of Transportation)

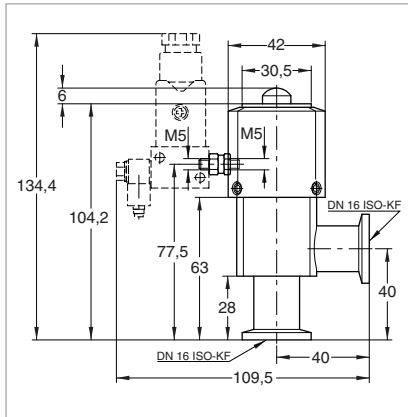

Dimensional drawing for the stainless steel right-angle valves with pilot valve

This valve was especially developed for applications which involve brake fluid (in accordance with DOT) and with special attention regarding safety in the presence of increased differential pressures.

Advantages to the User

- High degree of reliability and safety due to EPDM gaskets at the valve disk as well as within the body

- Stronger spring action on the valve disk
- Long service life
- Pilot valves for adaptation to all common control voltages and the interference suppression kit can be retrofitted
- Visual valve position indicator is standard
- Installation in any orientation and no restrictions as to the direction of flow

Technical Data

Right-Angle Valves for Mobile Systems according to DOT

Service life	cycles	10 mio.
Conductance at molecular flow	$l \times s^{-1}$	4.5
Leak rate	$mbar \times l \times s^{-1}$	1×10^{-9}
Operating pressure range	mbar	$10^{-8} - 5000$
Differential pressure, closing and opening direction	bar	5 / 5
Opening against differential pressure	bar	5
Ambient / Operating temperature, max.	°C	50
Protection class	IP	65
Opening / closing time for compressed air at 6 bar	ms	100 / 100
Switching frequency	1/min	100
Compressed air, overpressure	bar	4 - 8
Compressed air volume	cm^3	5.5
Compressed air connection	mm	4 and 6
Weight with pilot valve		0.3
Material		
Body		aluminum alloy (3.2381)
Inside section		stainless steel (1.4541 / 1.4301)
Gaskets		EPDM

Ordering Information


Right-Angle Valves for Mobile Systems according to DOT

Right-angle valve, without pilot valve, aluminum body	Part No. 215 009
Pilot valves	X
Interference suppression kits for different voltages	X
Seal kit EPDM	Part No. 215 012

X = Part Nos. see section "Valves with ISO-KF/ISO-K flanges", para "Accessories for the Electropneumatically Operated Valves"

Accessories for the Electropneumatically Operated Valves

Pilot Valves

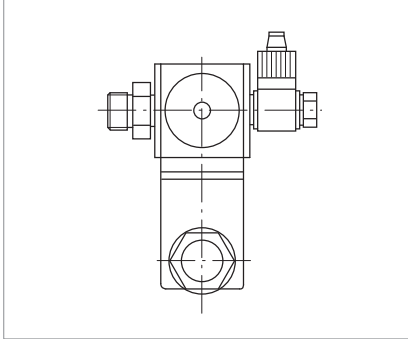

Pilot valve

A range of pilot valves is available for actuation of the electropneumatic ISO-KF valves, which cover all commonly used control voltages.

Advantages to the User

- Easy to fit to the pneumatic cylinder, adapter is included with the DOT valve

Supplied Equipment

- Hose connection and gasket for connection to the compressed air supply

Ordering Information

ISO-KF Pilot Valves for DOT Valves (incl. Solenoid Coil)

ISO-KF pilot valve for DOT valves, incl. solenoid coil 230 V AC / 50/60 Hz (normally closed)	Part No. 280 70
110 - 120 V AC / 50/60 Hz (normally closed)	Part No. 280 72
24 V DC (normally closed)	Part No. 280 74

Ordering Information

Spare Pilot Valve for ISO-K valves from DN 250 without coil

Spare pilot valve for DN 250 ISO-K to DN 630 ISO-K	Part No. 200 07 927
---	----------------------------

Interference Suppression Kit - Illuminated


As an option for the solenoid coil and the pilot valves an interference suppression kit is offered so as to reliably prevent any pick-up of interference by sensitive equipment in the vicinity of the solenoid coils.

Ordering Information

Interference Suppression Kit for different voltages

Interference Suppression Kit 24 V DC/AC 110 V AC 230 V AC	Part No. 287 84 upon request Part No. 287 83
--	--

Solenoid Coils for DN 250 ISO-K

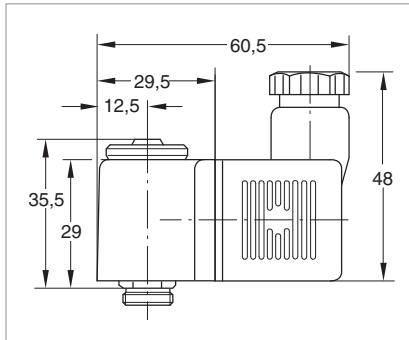

Dimensional drawing for the solenoid coils

Oerlikon Leybold Vacuum is offering a range of solenoid coils for the purpose of adapting the electropneumatically operated valve to different commonly used control voltages.

Advantages to the User

- Easy to fit (plug on and tighten with a knurled screw)

Technical Data

Solenoid Coils for Pilot Valves

		V=	V≈
Voltage	V	24 DC	24/110/230 AC; 50/60 Hz
Permissible voltage variation	%	±10	±10 at nominal frequency
Permissible frequency variation	%	-	±10 at nominal frequency
Power consumption at nominal operating voltage	W	4.1 at 12 V / 4.5 at 24 V	Actuate: 7.5 VA / Hold: 6.0 VA
Operating time		100 % ED	100 % ED
Type of protection to DIN 40 050	IP	65	65
Hose connection		Pg 9	Pg 9
Class of insulation material to VDE 0580		F	F
Test mark		VDE	VDE
Max. response time	ms	10	10
Weight	kg	0.065	0.055
Torque for the knurled screw, min. / max	Ncm	100 / 150	100 / 150

Ordering Information


Solenoid Coils for Pilot Valves

Solenoid coils for pilot valves
 230 V AC / 50/60 Hz
 110 - 120 V AC / 50/60 Hz
 24 V AC / 50/60 Hz
 24 V DC

Part No. 280 77
upon request
Part No. 280 79
Part No. 280 80

Special Valves for Turbomolecular Pumps

Solenoid Venting Valve

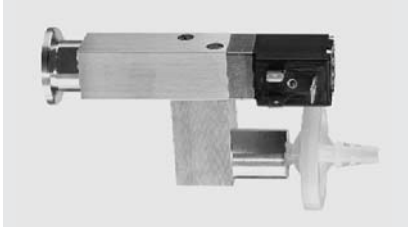

Technical Data

Drive voltage	V DC	24
Power consumption	W	4
Connecting flange	DN	16 ISO-KF
Weight, approx.	kg	0.3

Venting Valve

Ordering Information


Solenoid venting valve,
normally closed

Venting Valve

Part No. 800120V0011

Further vent valves available in US. Please contact your US sales office

Power Failure Venting Valve

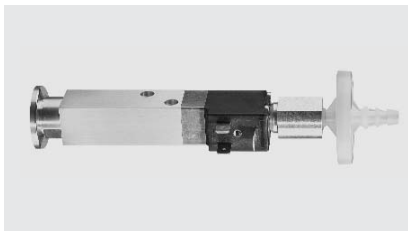

Technical Data

Drive voltage	V DC	24
Power consumption	W	4
Connecting flange	DN	16 ISO-KF
Weight, approx.	kg	0.3

Power Failure Venting Valve

Ordering Information

Power failure venting valve,
normally open

Power Failure Venting Valve

Part No. 800120V0021

Further vent valves available in US. Please contact your US sales office

Purge Gas and Venting Valve



Technical Data

Connecting flange	DN	10 ISO-KF
Weight, approx.	kg	0.7

Purge Gas and Venting Valve

Ordering Information

Purge gas and venting valve, 230 V
0.2 mbar x l x s⁻¹ (12 sccm)
0.4 mbar x l x s⁻¹ (24 sccm)


Purge Gas and Venting Valve

Part No. 855 19
Part No. 855 29

Purge gas and venting valve, 110 V
0.2 mbar x l x s⁻¹ (12 sccm)

Part No. 190 351 069

Purge Gas and Venting Valve

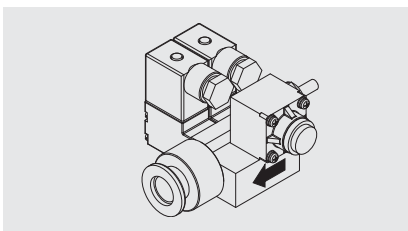

Technical Data

Connecting flange		
Inlet		1/4" pipe
Outlet		pump specific or DN 16 ISO-KF
Purge gas pressure, abs.	bar	1.5 to 6.0
Weight, approx.	kg	0.5

Purge Gas and Venting Valve

Ordering Information

Purge gas and venting valve, 24 V DC
0.6 mbar x l x s⁻¹ (36 sccm)

Purge Gas and Venting Valve

Part No. 121 33

Further 0.6 mbar x l x s⁻¹ valves upon request

UHV All-Metal Right-Angle Valves



The all-metal right-angle valves are of a fully welded design. The valve disk may be exchanged through the side flange.

Due to the selection of suitable materials, the valve stem need not be lubricated after every bake-out cycle.

The drive spindle of the valves transfers the motion via a pressure plate onto the sleeve-guided valve stem carrying the screwed-on valve disk. The valve disk consists of a copper plate.

Due to the specific properties of copper (ductility) this design offers great advantages over other materials: long service life and low closing forces when operating the valve.


A very high leak tightness achieved, even with a low closing force.

The compact design offers good operational characteristics also in view of temperature changes, offers a short flow path and hence improved conductance.

Advantages to the User

- Leak rate at the valve seat below 10^{-11} mbar x l x s⁻¹
- Absolutely reliable sealing of valve seat
- Simplest operation
- No lubrication of the spindle is necessary after bakeout
- Large removable handwheel for easy operation

UHV All-Metal Right-Angle Valves, with Rotatable Flanges on Both Sides

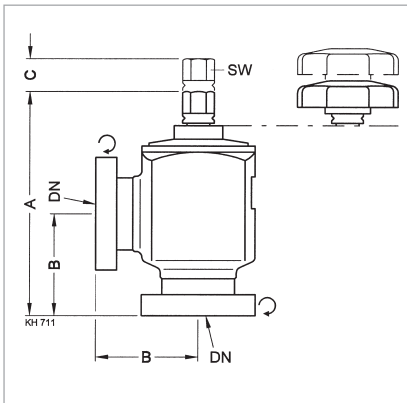

Dimensional drawing for the UHV all-metal right-angle valve

Dimension Table

DN	A	B	C	SW
16 CF-R	88.0	38.0	15.5	8.0
40 CF-R	140	63	26	17
63 CF-R	211.0	105.0	36.4	22.0

Technical Data

DN	CF	16	40	63
Connection flange rotatable	DN	16 CF-R	40 CF-R	63 CF-R
Service life	cycles	1000	1000	1000
Conductance for molecularflow	l/ s	3	38	100
Pressure, absolute	mbar	1×10^{-11}	1×10^{-11}	1×10^{-11}
min.	bar	4	4	4
max.				
Mounting orientation	mm	any	any	any
Bake out temperature without handwheel	°C	350	350	350
Bake out temperature with handwheel	°C	80	80	80
Max. heating and cooling rate	°C/min	4	4	2
Bellows	Material	Stainless steel 1.4541 ¹⁾	Stainless steel 1.4541 ¹⁾	Stainless steel 1.4541 ¹⁾
Housing	Material	Stainless steel 1.4301 ²⁾ welded	Stainless steel 1.4301 ²⁾ welded	Stainless steel 1.4301 ²⁾ welded
Valve disk	Material	Copper	Copper	Copper
Valve disk seal	Material	Copper	Copper	Copper
Weight	kg	0.4	2.0	5.0


Ordering Information

UHV all-metal right-angle valves	Part No.	289 80	289 81	289 82
Spare valve disk, 2 pieces	Part No.	215 410	-	-
Spare hand wheel, plastic	Part No.	215 412	215 442	-

¹⁾ = AISI Type 316

²⁾ = AISI Type 304

UHV All-Metal Variable Leak Valves

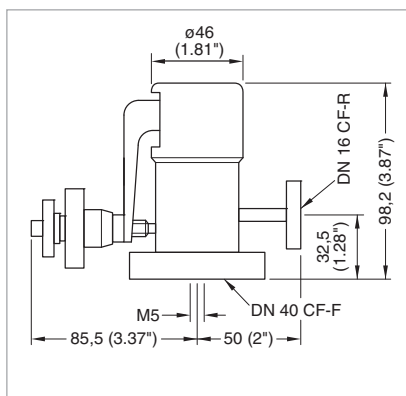

Dimensional drawing for the all-metal variable leak valves

Technical Data

UHV All-Metal Variable Leak Valves

Connection flanges			
Input	DN		16 CF-R
Output	DN		40 CF-R
Gas flow, min. for			
Pure gas	mbar x l x s ⁻¹		10 ⁻¹⁰
Air	mbar x l x s ⁻¹		10 ⁻⁹
Gas flow			
max.	mbar x l x s ⁻¹		600
adjustable, max.	mbar x l x s ⁻¹		100
Tightness	mbar x l x s ⁻¹		1 x 10 ⁻¹¹
Pressure absolute			
min.	mbar		1 x 10 ⁻¹⁰
max.	bar		30
Conductance for molecular flow	l x s ⁻¹		0.7
Operating temperature	°C		200
Bakeout temperature	°C		350
Valve seat	Material		Copper alloy
Valve plate	Material		Sapphire
Housing	Material		Stainless steel
Weight	kg		1.4


Ordering information

UHV All-Metal Variable Leak Valves

UHV all-metal variable leak valve	Part No. 289 90
Spare valve plate	Part No. 289 87
Spare valve seat	Part No. 289 88
Tool kit for valve seat	Part No. 290 97

Gate Valves with ISO-KF/CF/ISO-F Flanges


Overview

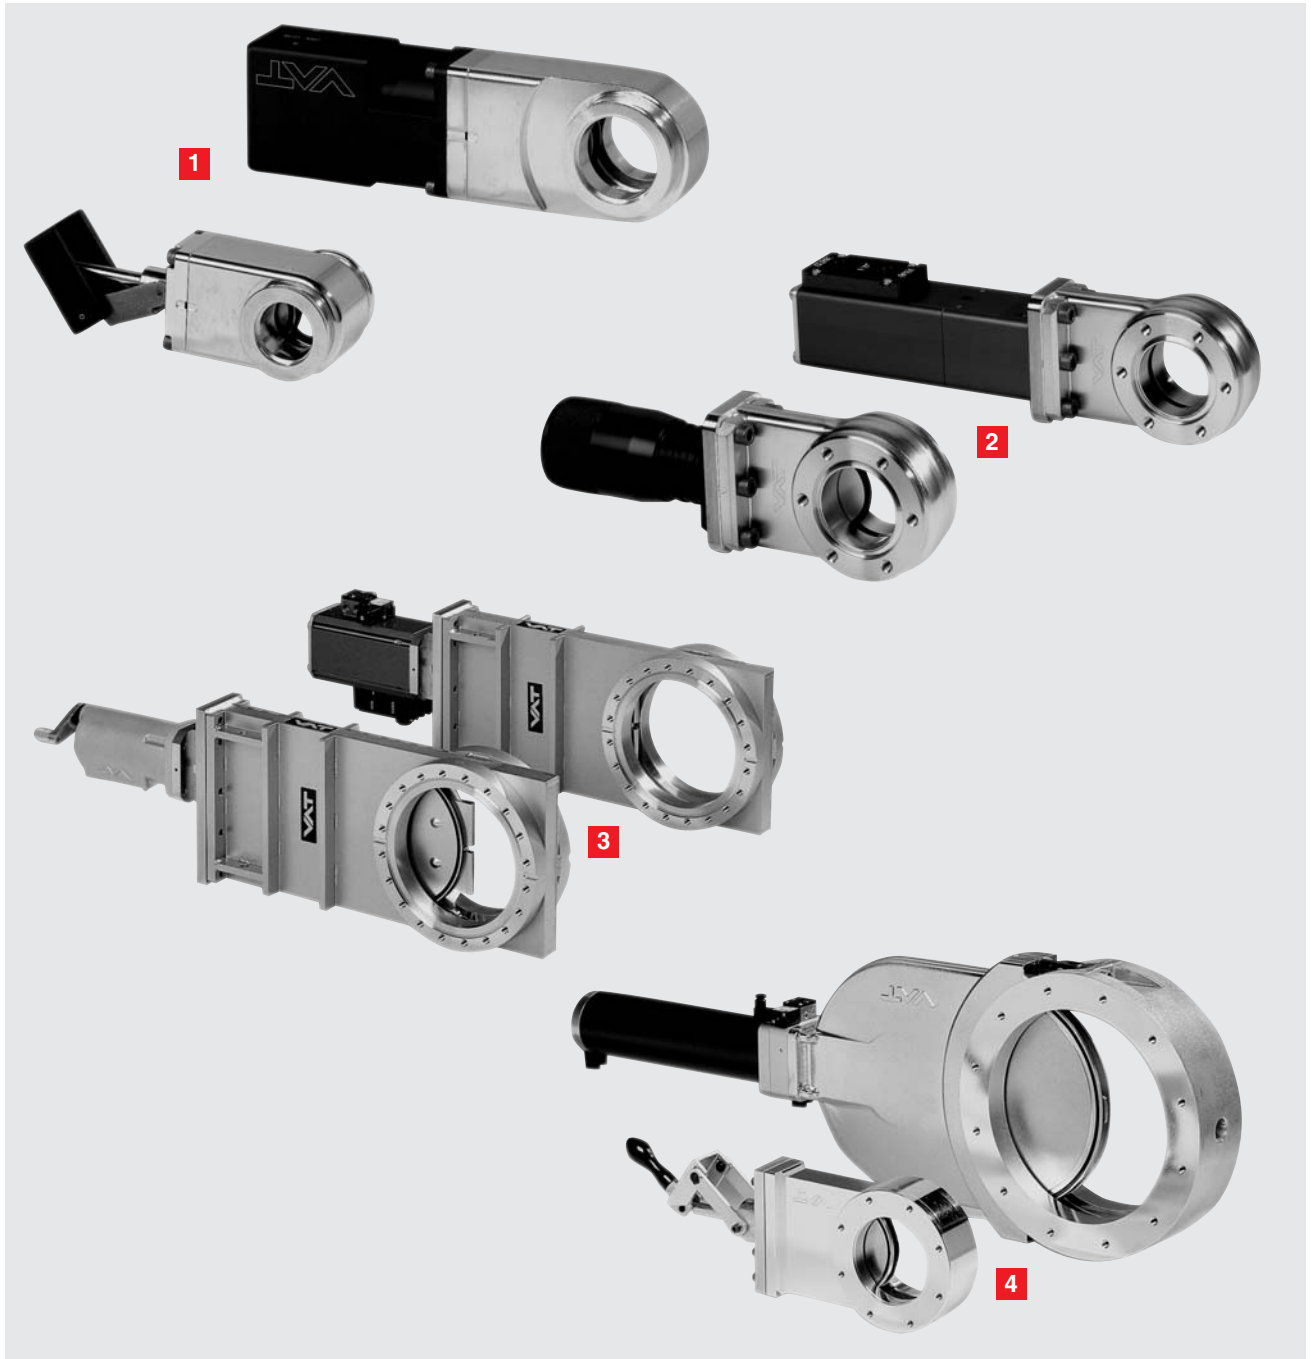

- 1** Miniature UHV gate valves, ISO-KF flange
- 2** Miniature UHV gate valves, CF flange
- 3** UHV gate valves
- 4** HV gate valves

For the precise installation dimensions, please refer to the product's Operating Instructions.

Miniature UHV Gate Valves, ISO-KF, Manually Operated (Articulated Lever)

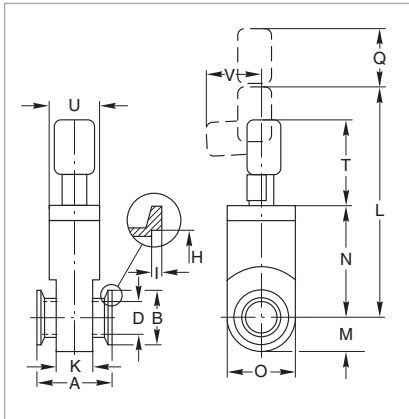

Dimensional drawing for the miniature UHV gate valves, articulated lever, ISO-KF flange

Dimension Table

	DN	16 ISO-KF	25 ISO-KF	40 ISO-KF
A	mm	40	50	51
B	mm	30	40	55
D	mm	15	24	39
H	mm	17.2	26.2	41.2
I	mm	3	3	3
K	mm	25	32	31
L	mm	100	139	208
M	mm	15.0	22.0	32.5
N	mm	39	59	93
O	mm	30	44	65
Q	mm	25	35	55
T	mm	37	50	85
U	mm	25	32	40
V	mm	30	30	50

Advantages to the User

- Manually actuated
- Valve technology with only one moving part
- Equipped with a mechanical position indicator
- Low particle generating and vibration free actuation
- Compact, light-weight design

Technical Data

Miniature UHV Gate Valve


		DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF
Tightness				
Body	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Valve seat	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Pressure range, abs.		1 x 10 ⁻⁷ mbar to 2 bar	1 x 10 ⁻⁷ mbar to 2 bar	1 x 10 ⁻⁷ mbar to 2 bar
High vacuum conductance	l x s ⁻¹	10	34	140
Differential pressure at the valve disk	bar	≤ 2 in both directions	≤ 2 in both directions	≤ 2 in both directions
Max. differential pressure during opening	mbar	≤ 30	≤ 30	≤ 30
Service life until first maintenance	cycles	50 000	50 000	50 000
Degassing temperature for the valve	°C	100 / 100	100 / 100	100 / 100
manual open / closed	°C	80	80	80
Installation orientation		any	any	any
Weight	kg	0.4	0.4	0.7
Material				
Valve body		AlMgSi1 (3.2315)	AlMgSi1 (3.2315)	AlMgSi1 (3.2315)
Valve disk		AISI 301 (1.4310)	AISI 301 (1.4310)	AISI 301 (1.4310)
Seal (head, disk)		Viton/Viton	Viton/Viton	Viton/Viton

Ordering Information


Miniature UHV Gate Valve

	DN 16 ISO-KF	DN 25 ISO-KF	DN 40 ISO-KF
Miniature gate valve, manually operated, articulated lever	Part No. 286 06	Part No. 286 08	Part No. 286 09

Miniature UHV Gate Valves, ISO-KF and CF, Manually Operated (Handwheel)

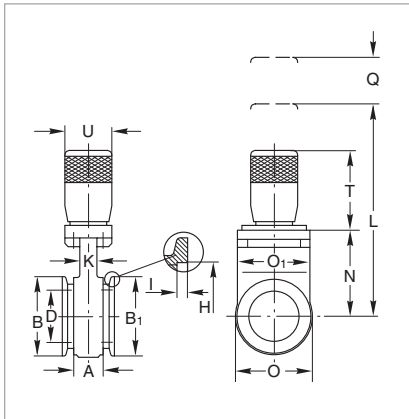

Dimensional drawing for the miniature UHV gate valves, manually operated (handwheel), DN 40 ISO-KF

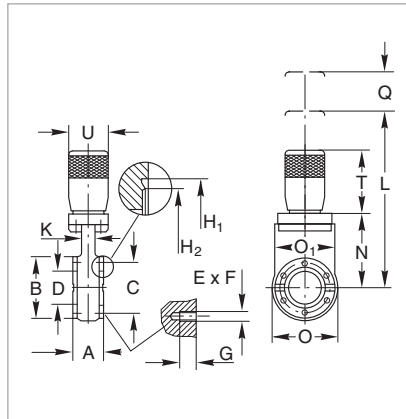

Dimensional drawing for the miniature UHV gate valves, manually operated (handwheel), DN 40 CF

Advantages to the User

- Bellows-sealed push gate feed-through
- Valve technology with only one moving part
- Equipped with a mechanical position indicator
- Low particle generating and vibration free actuation
- Compact, light-weight design

Dimension Table

	DN	40 ISO-KF	40 CF
A	mm	50	35
B	mm	72	72
B ₁	mm	55	-
C	mm	-	58.7
D	mm	40	40
E x F		-	6 x M 6
G	mm	-	7
H	mm	41.2	-
H ₁	mm	-	48.3
H ₂	mm	-	42
I	mm	3	-
K	mm	16	16
L	mm	198	198
N	mm	82	82
O	mm	76	76
O ₁	mm	70	70
Q	mm	55	55
T	mm	73	73
U	mm	45	45

Technical Data

Miniature UHV Gate Valve

		DN 40 ISO-KF	DN 40 CF
Tightness			
Body	mbar x l x s ⁻¹	< 5 x 10 ⁻¹⁰	< 5 x 10 ⁻¹⁰
Valve seat	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Pressure range, abs.		1 x 10 ⁻¹⁰ mbar to 2 bar	1 x 10 ⁻¹⁰ mbar to 2 bar
High vacuum conductance	l x s ⁻¹	160	220
Differential pressure at the valve disk	bar	≤ 2 in both directions	≤ 2 in both directions
Max. differential pressure during opening	mbar	≤ 30	≤ 30
Service life until first maintenance	cycles	50 000	50 000
Degassing temperature valve open / closed	°C	250 / 200	250 / 200
manually operated	°C	250	250
Installation orientation		any	any
Weight	kg	1.5	1.5
Material			
Valve body		AISI 304 (1.4301)	AISI 304 (1.4301)
Valve disk		AISI 304 (1.4301)	AISI 304 (1.4301)
Bellows		AISI 316 L (1.4435)	AISI 316 L (1.4435)
Seal (head, disk)		Viton/Viton	Viton/Viton


Ordering Information

Miniature UHV Gate Valve


	DN 40 ISO-KF	DN 40 CF
Miniature gate valve, manually operated, handwheel	Part No. 286 15	Part No. 286 84
6 set screws with nuts and washers ¹⁾	-	Part No. 839 11

¹⁾ For dimensions E x F see table "Connections for CF"

Miniature UHV Gate Valves, ISO-KF / CF, Electropneumatically Operated

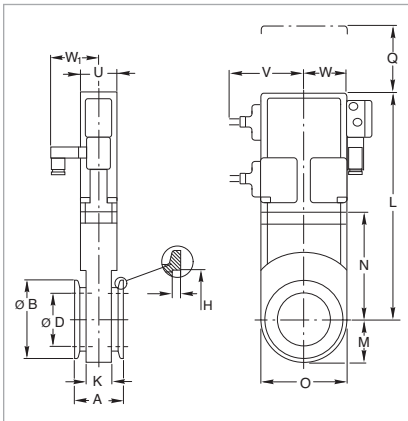

Dimensional drawing for the miniature UHV gate valves; electropneumatically operated, ISO-KF flange

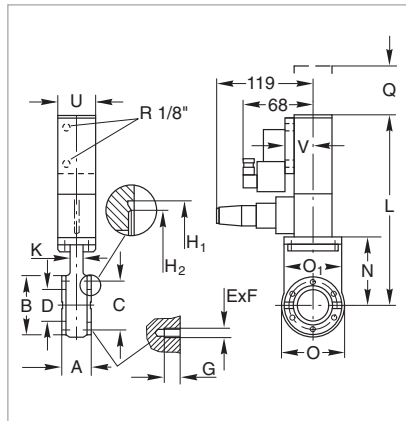

Dimensional drawing for the miniature UHV gate valves; electropneumatically operated, CF flange

Advantages to the User

- Double-acting electropneumatic actuator (with position indicator and pilot valve); bellows-sealed push gate feedthrough
- Valve technology with only one moving part
- Equipped with a mechanical position indicator
- Actuation free of particles and vibrations
- Short closing time, very long service life
- Compact, light-weight design

Dimension Table

	DN	40 ISO-KF	40 CF
A	mm	51	35
B	mm	55	72
C	mm	-	58.7
D	mm	40	40
E x F	mm	-	6 x M 6
G	mm	-	7
H	mm	41.2	-
H ₁	mm	-	48.3
H ₂	mm	-	42
I	mm	3	-
K	mm	31	16
L	mm	196	230
M	mm	32.5	-
N	mm	88	82
O	mm	65	76
O ₁	mm	-	70
Q	mm	55	55
T	mm	-	73
U	mm	40	45
V	mm	65	32.5
W	mm	61	-
W ₁	mm	50	-

Technical Data

Miniature UHV Gate Valve

		DN 40 ISO-KF (Aluminum)	DN 40 ISO-KF (Stainless steel)	DN 40 CF (Stainless steel)
Tightness				
Body	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 5 x 10 ⁻¹⁰	5 x 10 ⁻¹⁰
Valve seat	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Pressure range, abs.		1 x 10 ⁻⁷ mbar to 2 bar	1 x 10 ⁻¹⁰ mbar to 2 bar	1 x 10 ⁻¹⁰ mbar to 2 bar
High vacuum conductance	l x s ⁻¹	140	160	220
Differential pressure at the valve disk	bar	≤ 2 in both directions	≤ 2 in both directions	≤ 2 in both directions
Max. differential pressure during opening	mbar	≤ 30	≤ 30	≤ 30
at reduced service life	bar	1	1	1
Service life until first maintenance	cycles	50 000	50 000	50 000
Degassing temperature valve open / closed	°C	≤ 100 / 100	≤ 250 / 200	≤ 250 / 200
pneumatic actuation	°C	≤ 80	≤ 200	≤ 200
position indicator / pilot valve	°C	80 / 50	80 / 50	80 / 50
Warming-up and cooling down speed	°C x h ⁻¹	50	50	50
Compressed air, min. / max.	bar	4.5 / 7.0	4.5 / 7.0	4.5 / 7.0
Closing / opening time	s	1.1	0.7	0.7
Pilot valve supply voltage / power consumption		24 V DC / 6 W or 230 V AC, 50/60 Hz / 2 W	24 V DC / 6 W or 230 V AC, 50/60 Hz / 2 W	24 V DC / 6 W or 230 V AC, 50/60 Hz / 2 W
Switching capacity of the pos. indicator at 80 °C	A	0.5 at 50 V AC; max. 10 W / 0.5 at 75 V DC; max. 10 W	5 at 250 V AC; 3 at 50 V DC	5 at 250 V AC; 3 at 50 V DC
Installation orientation		any	any	any
Weight	kg	1.2	1.8	1.8
Material				
Valve body		AlMgSi1 (3.2315)	AISI 304 (1.4301)	AISI 304 (1.4301)
Disk		AISI 301 (1.4310)	AISI 304 (1.4301)	AISI 304 (1.4301)
Bellows		-	AISI 316 L (1.4435)	AISI 316 L (1.4435)
Seal (head, disk)		Viton/Viton	Metal/Viton	Metal/Viton


Ordering Information

Miniature UHV Gate Valve


	DN 40 ISO-KF (Aluminum)	DN 40 ISO-KF (Stainless steel)	DN 40 CF (Stainless steel)
Miniature gate valve, electropneumatically operated 24 V DC / 6 W 230 V AC, 50/60 Hz / 2 W	Part No. 286 54 -	Part No. 286 36 Part No. 286 35	Part No. 286 99 Part No. 286 94
6 set screws with nuts and washers ¹⁾	-	-	Part No. 839 11

¹⁾ For dimensions E x F see table "Connections for CF"

HV Gate Valves, ISO-F Manually Operated

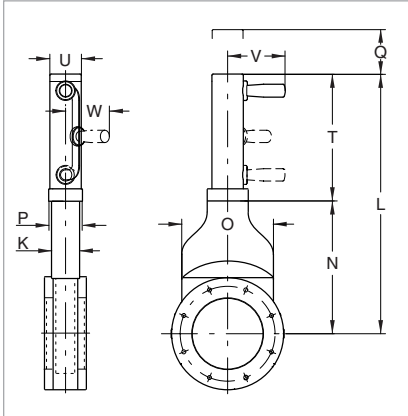

Dimensional drawing for the HV gate valves; manually operated, DN 63 ISO-F and DN 100 ISO-F

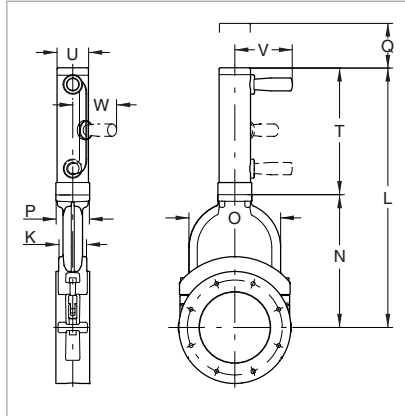


Dimensional drawing for the HV gate valves; manually operated, DN 160 ISO-F

Advantages to the User

- Cost-effective gate valve for industrial applications with elastomer-sealed push gate feedthrough
- Aluminum body
- Slim and light-weight
- Low play in the locked state and low wear

Dimension Table

	DN	63 ISO-F	100 ISO-F	160 ISO-F
K	mm	36	36	58
L	mm	329.5	413.0	547.0
N	mm	155.5	203.5	280.0
O	mm	100	140	192
P	mm	48	48	70
Q	mm	25	25	60
T	mm	174.0	209.5	267.0
U	mm	43	43	65
V	mm	94	94	122
W	mm	75	75	95

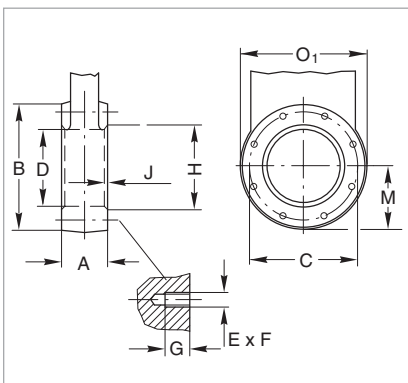

Connection dimensions for ISO-F flanges (HV gate valves)

Connections for ISO-F

	DN	63 ISO-F	100 ISO-F	160 ISO-F
A	mm	60	60	70
B	mm	130	165	235
C	mm	110	145	200
D	mm	65	100	150
E x F		4 x M8	8 x M8	8 x M10
G	mm	12	12	16
H	mm	70	102	153
J	mm	3	3	5
M	mm	65.5	83.0	117.5
O ₁	mm	131	166	237

Technical Data

HV Gate Valve

		DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F
Tightness				
Body	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Valve seat	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Pressure range, abs.		1 x 10 ⁻⁷ mbar to 1.6 bar	1 x 10 ⁻⁷ mbar to 1.6 bar	1 x 10 ⁻⁷ mbar to 1.6 bar
High vacuum conductance	l x s ⁻¹	550	2000	6000
Differential pressure at the valve disk	bar	1.6 in both directions	1.6 in both directions	1.6 in both directions
Max. differential pressure during opening	mbar	≤ 30	≤ 30	≤ 30
Service life until first maintenance	cycles	200000	200000	100000
Degassing temperature				
valve	°C	120	120	120
manually operated	°C	80	80	80
Installation orientation		any	any	any
Weight	kg	3.0	4.5	9.0
Material				
Valve body		AlMg4.5Mn	AlMg4.5Mn	G-AlSi7Mg
Valve disk		AISI 304 (1.4301)	AISI 304 (1.4301)	AlMgSi1
Mechanism		AISI 301 (1.4310), AISI 304 (1.4301), AISI 420 (1.4034)	AISI 301 (1.4310), AISI 304(1.4301), AISI 420 (1.4034)	AISI 301 (1.4310), AISI 304(1.4301), AISI 420 (1.4034)
Gaskets (head, disk)		Viton	Viton	Viton


Ordering Information

HV Gate Valve


		DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F
HV gate valve, manually operated		Part No. 286 25	Part No. 286 26	Part No. 215 633
Set screws with nuts and washers ¹⁾		Part No. 839 13	Part No. 839 13	Part No. 210 071
(Package each containing)	pieces	16	16	12

¹⁾ For dimensions E x F see table "Connections for ISO-F"

HV Gate Valves, ISO-F, Electropneumatically Operated

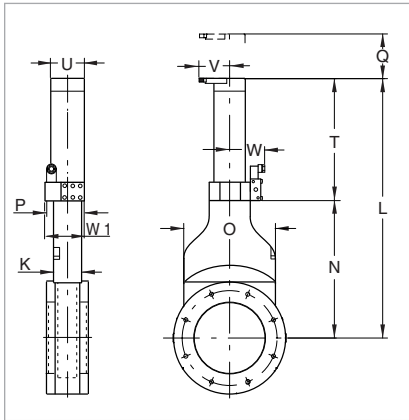

Dimensional drawing for the gate valves;
DN 63 ISO-F and DN 100 ISO-F

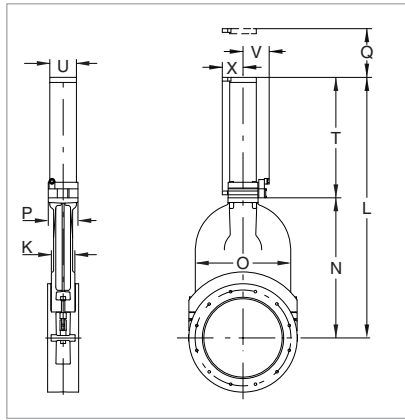


Dimensional drawing for the gate valves;
DN 160 ISO-F to DN 250 ISO-F

Advantages to the User

- Cost-effective gate valve for industrial applications with elastomer-sealed push gate feedthrough
- Aluminum body
- Slim and light-weight
- Low play in the locked state and low wear

Dimension Table

	DN	63 ISO-F	100 ISO-F	160 ISO-F	200 ISO-F	250 ISO-F
K	mm	36	36	58	66	76
L	mm	341.5	424.0	547.0	688.0	843.0
L ₁	mm	155.5	203.5	280.0	363.5	453.0
N	mm	100	140	192	240	308
O	mm	58	58	70	80	96
P	mm	25	25	60	80	100
Q	mm	186.0	221.5	267.0	324.5	390.0
T	mm	55	55	65	75	86
U	mm	56.0	56.0	71.5	76.5	84.5
V	mm	72	72	-	-	-
W	mm	65.5	65.5	-	-	-
X	mm	59	59	57	62	67

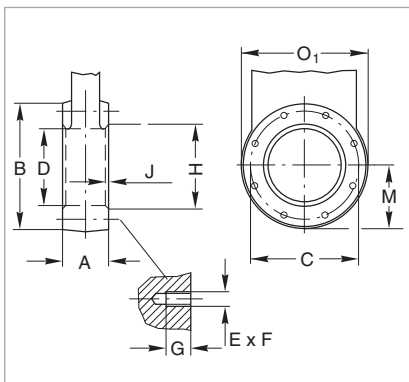

Connection dimensions for ISO-F flanges
(HV Gate Valves)

Connections for ISO-F

	DN	63 ISO-F	100 ISO-F	160 ISO-F	200 ISO-F	250 ISO-F
A	mm	60	60	70	80	100
B	mm	130	165	235	288	350
C	mm	110	145	200	260	310
D	mm	65	100	150	200	261
E x F		4 x M8	8 x M8	8 x M10	12 x M10	12 x M10
G	mm	12	12	16	16	16
H	mm	70	102	153	213	-
J	mm	3	3	5	5	-
M	mm	65.5	83.0	117.5	144.0	175.0
O ₁	mm	131	166	237	290	352

Technical Data

HV Gate Valve

		DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F	DN 200 ISO-F	DN 250 ISO-F
Tightness						
Body	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Valve seat	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Pressure range, abs.		1 x 10 ⁻⁷ mbar to 1.6 bar	1 x 10 ⁻⁷ mbar to 1.6 bar	1 x 10 ⁻⁷ mbar to 1.6 bar	1 x 10 ⁻⁷ mbar to 1.6 bar	1 x 10 ⁻⁷ mbar to 1.2 bar
High vacuum conductance	l x s ⁻¹	550	2000	6000	12000	22000
Differential pressure at the valve disk, max.		≤ 1600 in both directions	≤ 1600 in both directions	≤ 600 in both directions	≤ 1600 in both directions	≤ 1200 in both directions
during opening, max.		≤ 30	≤ 30	≤ 30	≤ 30	≤ 30
Compressed air, min. / max.		4 / 7	4 / 7	4 / 7	4 / 7	4 / 7
Closing / opening time		1.5	2.0	2.0	3.0	5.0
Service life until first maintenance		200000	200000	100000	100000	100000
Degassing temperature valve		120	120	120	120	120
pneumatic drive		80	80	80	80	80
position indicator		80	80	80	80	80
pilot valve		50	50	50	50	50
Switching capacity for the position indicator		A 5 at 230 V AC; 3 at 50 V DC	5 at 230 V AC; 3 at 50 V DC	5 at 230 V AC; 3 at 50 V DC	5 at 230 V AC; 3 at 50 V DC	5 at 230 V AC; 3 at 50 V DC
Installation orientation		any	any	any	any	any
Weight		3.0	4.5	9.0	18.0	25.0
Material						
Valve body		AlMg4.5Mn	AlMg4.5Mn	G-AlSi7Mg	G-AlSi7Mg	G-AlSi7Mg
Valve disk		AISI 304 (1.4301)	AISI 304 (1.4301)	AlMgSi1,	AlMgSi1,	AlMgSi1,
Mechanism		AISI 301 (1.4310), AISI 304 (1.4301), AISI 420 (1.4034)	AISI 301 (1.4310), AISI 304 (1.4301), AISI 420 (1.4034)	AISI 301 (1.4310), AISI 304 (1.4301), AISI 420 (1.4034)	AISI 301 (1.4310), AISI 304 (1.4301), AISI 420 (1.4034)	AISI 301 (1.4310), AISI 304 (1.4301), AISI 420 (1.4034)
Gaskets (head, disk)		Viton	Viton	Viton	Viton	Viton


Ordering Information

HV Gate Valve


		DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F	DN 200 ISO-F	DN 250 ISO-F
HV gate valve, electropneumatically operated						
24 V DC / 2.5 W		Part No. 286 55	Part No. 286 56	-	-	-
24 V DC / 6 W		-	-	Part No. 215 643	Part No. 215 644	Part No. 215 645
230 V AC, 50 Hz / 7.1 W		Part No. 286 45	Part No. 286 46	Part No. 215 653	Part No. 215 654	Part No. 215 655
Set screws with nuts and washers ¹⁾		Part No. 839 13	Part No. 839 13	Part No. 210 071	Part No. 210 071	Part No. 210 071
(Package each containing)		pieces 16	16	12	12	12

¹⁾ For dimensions E x F see table "Connections for ISO-F"

UHV Gate Valves, CF Manually Operated

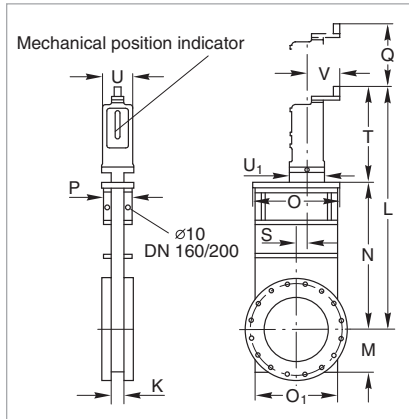

Dimensional drawing for the UHV gate valves
DN 63 CF to DN 200 CF

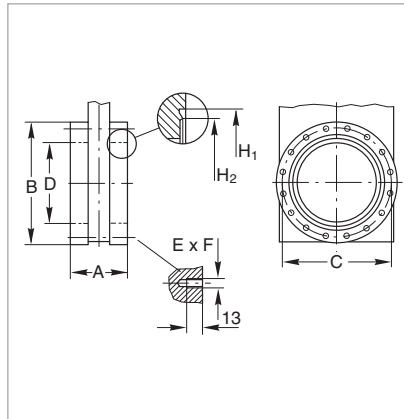

Connection dimensions for CF flanges
(UHV gate valves)

Advantages to the User

- Valve and wheel can be degassed at temperatures up to 250 °C
- Steel body (non-rusting)
- Bellows-sealed push gate feed-through
- Low play in the locked state and low wear
- Compact
- Mechanically locked in the closed state
- Mechanical position indicator

Dimension Table

	DN	63 CF	100 CF	160 CF	200 CF
K	mm	27	27	27	35
L	mm	408	462	552	660
M	mm	57	73	99	125
N	mm	192	247	336	430
O	mm	115	145	200	250
O₁	mm	112	142	192	240
P	mm	70	70	70	80
Q	mm	180	220	290	350
S	mm	11.0	9.0	25.0	38.5
T	mm	184	184	184	200
U	mm	70	70	70	90
U₁	mm	83	83	83	103
V	mm	77	77	77	94

Connections for CF

	DN	63 CF	100 CF	160 CF	200 CF
A	mm	70	70	70	80
B₂	mm	113.5	151.6	202.4	253.2
C	mm	92.1	130.2	181.0	231.8
D	mm	70	100	150	200
E x F		8 x M8	16 x M8	20 x M8	24 x M8
H₁	mm	82.5	120.65	171.45	222.3
H₂	mm	77.4	115.5	166.0	217.0

Technical Data

UHV Gate Valve

		DN 63 CF	DN 100 CF	DN 160 CF	DN 200 CF
Tightness					
Body	mbar x l x s ⁻¹	< 5 x 10 ⁻¹⁰	< 5 x 10 ⁻¹⁰	< 5 x 10 ⁻¹⁰	< 5 x 10 ⁻¹⁰
Valve seat	mbar x l x s ⁻¹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹	< 1 x 10 ⁻⁹
Pressure range, abs.		1 x 10 ⁻¹⁰ mbar to 1.6 bar	1 x 10 ⁻¹⁰ mbar to 1.6 bar	1 x 10 ⁻¹⁰ mbar to 1.6 bar	1 x 10 ⁻¹⁰ mbar to 1.6 bar
High vacuum conductance	l x s ⁻¹	600	1700	6000	12000
Differential pressure at the valve disk	bar	≤ 1.6 in both directions	≤ 1.6 in both directions	≤ 1.6 in both directions	≤ 1.6 in both directions
Max. differential pressure during opening	mbar	≤ 30	≤ 30	≤ 30	≤ 30
Number of spindle turns for full travel		10	13	17	17
Service life until first maintenance	cycles	50 000	50 000	50 000	50 000
Degassing temperature					
valve open / closed	°C	250 / 200	250 / 200	250 / 200	250 / 200
manually operated	°C	250	250	250	250
Warming-up / cooling down speed	°C x h ⁻¹	50	50	50	50
Installation orientation		any	any	any	any
Weight	kg	9	12	18	28
Material					
Body		AISI 304 (1.4301)	AISI 304 (1.4301)	AISI 304 (1.4301)	AISI 304 (1.4301)
Bellows		AISI 316 L (1.4435)	AISI 316 L (1.4435)	AISI 316 L (1.4435)	AISI 316 L (1.4435)
Mechanism		AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)
Gaskets (head, disk)		Metal / Viton	Metal / Viton	Metal / Viton	Metal / Viton


Ordering Information

UHV Gate Valve


	DN 63 CF	DN 100 CF	DN 160 CF	DN 200 CF
UHV gate valve, manually operated	Part No. 286 85	Part No. 286 86	Part No. 286 87	Part No. 286 88
16 set screws with nuts and washers ¹⁾	Part No. 839 13	Part No. 839 13	2 x Part No. 839 13	2 x Part No. 839 13

¹⁾ For dimensions E x F see table "Connections for ISO-F"

UHV Gate Valves, ISO-F, Electropneumatically Operated

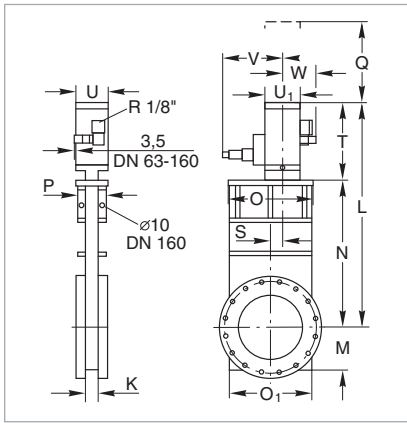

Dimensional drawing for the UHV gate valves ISO-F

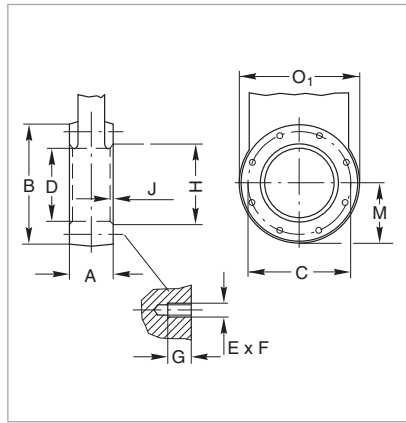

Connection dimensions for ISO-F flanges (UHV gate valves)

Advantages to the User

- Valve and pneumatic drive can be degassed at temperatures up to 250 °C and 200 °C respectively
- Steel body (non-rusting)
- Double-acting electropneumatic actuator (with position indicator and pilot valve)
- Bellows-sealed push gate feed-through
- Low play in the locked state and low wear
- Compact
- Mechanically locked in the closed state

Dimension Table

	DN	63 ISO-F	100 ISO-F	160 ISO-F	250 ISO-F
K	mm	27	27	27	41
L	mm	346	418	523	800
M	mm	57	73	99	161
N	mm	192	247	336	560
O	mm	115	145	200	345
O ₁	mm	112	142	192	322
P	mm	70	70	70	80
Q	mm	180	220	290	450
S	mm	11	9	25	65
T	mm	154	171	187	240
U	mm	70	70	70	90
U ₁	mm	83	83	83	103
V	mm	145	145	145	155
W	mm	77	77	77	87

Connections for ISO-F

	DN	63 ISO-F	100 ISO-F	160 ISO-F	250 ISO-F
A	mm	70	70	70	100
B	mm	130	165	225	350
C	mm	110	145	200	310
D	mm	70	100	150	261
E x F		4 x M8	8 x M8	8 x M10	12 x M10
G	mm	13	13	13	15
H	mm	-	102	153	-
J	mm	-	3	5	-

Technical Data

UHV Gate Valve

		DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F	DN 250 ISO-F
Tightness	Body	$< 5 \times 10^{-10}$	$< 5 \times 10^{-10}$	$< 5 \times 10^{-10}$	$< 5 \times 10^{-10}$
	Valve seat	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$
Pressure range, abs.		1 x 10 ⁻¹⁰ mbar to 1 bar	1 x 10 ⁻¹⁰ mbar to 1 bar	1 x 10 ⁻¹⁰ mbar to 1 bar	1 x 10 ⁻¹⁰ mbar to 1 bar
High vacuum conductance	l x s ⁻¹	600	1700	6000	26000
Differential pressure at the valve disk	bar	1 in both directions	1 in both directions	1 in both directions	1 in both directions
Max. differential pressure during opening	mbar	30	30	30	30
Compressed air, min. / max.	bar	4 / 7	4 / 7	4 / 7	5 / 7
Closing / opening time	s	1.0	1.2	1.5	4.0
Compressed air cylinder, volume	l	0.08	0.11	0.14	0.35
Service life until first maintenance	cycles	50 000	50 000	50 000	50 000
Degassing temperature	valve open / closed	250 / 200	250 / 200	250 / 200	250 / 200
	pneumatic drive	200	200	200	200
	position indicator / pilot valve	80 / 50	80 / 50	80 / 50	80 / 50
Warming-up / cooling down speed	°C x h ⁻¹	50	50	50	50
Pilot valve supply voltage / power consumption		24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W	24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W	24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W	24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W
Switching capacity for the position indicator at 80 °C	A	5 at 250 V AC; 3 at 50 V DC	5 at 250 V AC; 3 at 50 V DC	5 at 250 V AC; 3 at 50 V DC	5 at 250 V AC; 3 at 50 V DC
Installation orientation		any	any	any	any
Weight	kg	9	12	18	42
Material	Body	AISI 304 (1.4301)	AISI 304 (1.4301)	AISI 304 (1.4301)	AISI 304 (1.4301)
	Bellows	AISI 316 L (1.4435)	AISI 316 L (1.4435)	AISI 316 L (1.4435)	AISI 316 L (1.4435)
	Mechanism	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)
	Gaskets (head, disk)	Metal / Viton	Metal / Viton	Metal / Viton	Metal / Viton


Ordering Information

UHV Gate Valve


		DN 63 ISO-F	DN 100 ISO-F	DN 160 ISO-F	DN 250 ISO-F
UHV gate valve, electropneumatically operated		-	Part No. 286 73	Part No. 286 74	Part No. 286 81
24 V DC / 6 W		-	Part No. 286 76	Part No. 286 77	-
230 V AC, 50 Hz / 7.1 W					
Set screws with nuts and washers ¹⁾		Part No. 839 13	Part No. 839 13	Part No. 210 071	Part No. 210 071
(Package each containing)	pieces	16	16	12	12

¹⁾ For dimensions E x F see table "Connections for ISO-F"

UHV Gate Valves, CF, Electropneumatically Operated

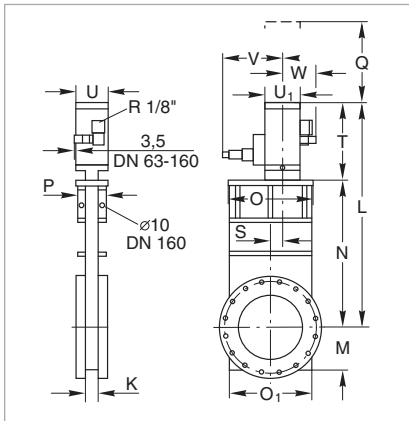

Dimensional drawing for the UHV gate valves CF electropneumatically operated

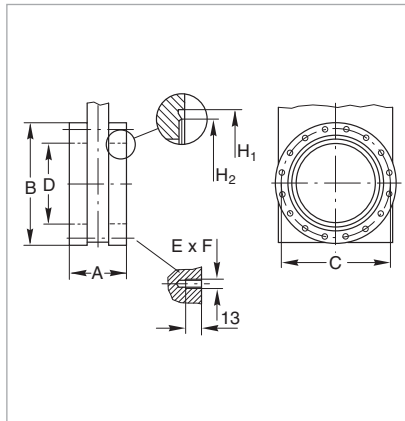

Connection dimension for CF flanges (UHV Gate Valves)

Dimension Table

	DN	63 CF	100 CF	160 CF	200 CF
K	mm	27	27	27	35
L	mm	346	418	523	630
M	mm	57	73	99	125
N	mm	192	247	336	430
O	mm	115	145	200	250
O₁	mm	112	142	192	240
P	mm	70	70	70	80
Q	mm	180	220	290	350
S	mm	11	9	25	38,5
T	mm	154	171	187	200
U	mm	70	70	70	90
U₁	mm	83	83	83	103
V	mm	145	145	145	155
W	mm	77	77	77	87

Connections for CF

	DN	63 CF	100 CF	160 CF	200 CF
A	mm	70	70	70	80
B₂	mm	113.5	151.6	202.4	253.2
C	mm	92.1	130.2	181.0	231.8
D	mm	70	100	150	200
E x F		8 x M8	16 x M8	20 x M8	24 x M8
H₁	mm	82.5	120.65	171.45	222.3
H₂	mm	77.4	115.5	166.0	217.0

Advantages to the User

- Double-acting electropneumatic actuator (with position indicator and pilot valve)
- Bellows-sealed push gate feed-through
- Valve and pneumatic drive can be degassed at temperatures up to 250 °C and 200 °C respectively
- Steel body (non-rusting)
- Low play in the locked state and low wear
- Compact
- Mechanically locked in the closed state

Technical Data

UHV Gate Valve

		DN 63 CF	DN 100 CF	DN 160 CF	DN 200 CF
Tightness	Body	$< 5 \times 10^{-10}$	$< 5 \times 10^{-10}$	$< 5 \times 10^{-10}$	$< 5 \times 10^{-10}$
	Valve seat	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$	$< 1 \times 10^{-9}$
Pressure range, abs.		1 x 10 ⁻¹⁰ mbar to 1 bar	1 x 10 ⁻¹⁰ mbar to 1 bar	1 x 10 ⁻¹⁰ mbar to 1 bar	1 x 10 ⁻¹⁰ mbar to 1 bar
High vacuum conductance	l x s ⁻¹	600	1700	6000	12000
Differential pressure at the valve disk	bar	1 in both directions	1 in both directions	1 in both directions	1 in both directions
Max. differential pressure during opening	mbar	30	30	30	30
Compressed air, min. / max.	bar	4 / 7	4 / 7	4 / 7	5 / 7
Closing / opening time	s	1.0	1.2	1.5	4.0
Compressed air cylinder, volume	m ³	0.08	0.11	0.14	0.35
Service life until first maintenance	cycles	50 000	50 000	50 000	50 000
Degassing temperature	valve open / closed	250 / 200	250 / 200	250 / 200	250 / 200
	pneumatic drive	200	200	200	200
	position indicator / pilot valve	80 / 50	80 / 50	80 / 50	80 / 50
Warming-up / cooling down speed	°C x h ⁻¹	50	50	50	50
Pilot valve supply voltage / power consumption		24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W	24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W	24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W	24 V DC / 6 W or 230 V AC, 50 Hz / 7.1 W
Switching capacity for the position indicator at 80 °C	A	5 at 250 V AC; 3 at 50 V DC	5 at 250 V AC; 3 at 50 V DC	5 at 250 V AC; 3 at 50 V DC	5 at 250 V AC; 3 at 50 V DC
Installation orientation		any	any	any	any
Weight	kg	9	12	18	28
Material					
Body		AISI 304 (1.4301)	AISI 304 (1.4301)	AISI 304 (1.4301)	AISI 304 (1.4301)
Bellows		AISI 316 L (1.4435)	AISI 316 L (1.4435)	AISI 316 L (1.4435)	AISI 316 L (1.4435)
Mechanism		AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)	AISI 304 (1.4301), AISI 316 L (1.4404), AISI 301 (1.4310), AISI 420 (1.4034)
Gaskets (head, disk)		Metal / Viton	Metal / Viton	Metal / Viton	Metal / Viton

Ordering Information

UHV Gate Valve

	DN 63 CF	DN 100 CF	DN 160 CF	DN 200 CF
UHV gate valve, electropneumatically operated 24 V DC / 6 W 230 V AC, 50 Hz / 7.1 W	Part No. 286 89 Part No. 286 95	Part No. 286 90 Part No. 286 96	Part No. 286 91 Part No. 286 97	Part No. 286 92 -
16 set screws with nuts and washers ¹⁾	Part No. 839 13	Part No. 839 13	2 x Part No. 839 13	2 x Part No. 839 13

¹⁾ For dimensions E x F see table "Connections for ISO-F"

Sales and Service

Germany

Oerlikon
Leybold Vacuum GmbH
Bonner Strasse 498
D-50968 Cologne
Phone: +49-(0)221-347 1234
Fax: +49-(0)221-347 1245
sales.vacuum@oerlikon.com
www.oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Sales Area North/Northeast
Branch Office Berlin
Industriestrasse 10b
D-12099 Berlin
Phone: +49-(0)30-435 609 0
Fax: +49-(0)30-435 609 10
sales.vacuum.bn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Sales Area South/Southwest
Branch Office Munich
Karl-Hammerschmidt-Strasse 34
D-85609 Aschheim-Dornach
Phone: +49-(0)89-357 33 9-10
Fax: +49-(0)89-357 33 9-33
sales.vacuum.mn@oerlikon.com
service.vacuum.mn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Sales Area West & Benelux
Branch Office Cologne
Bonner Strasse 498
D-50968 Cologne
Phone: +49-(0)221-347 1270
Fax: +49-(0)221-347 1291
sales.vacuum.kn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Service Competence Center
Emil-Hoffmann-Strasse 43
D-50996 Cologne-Suerth
Phone: +49-(0)221-347 1439
Fax: +49-(0)221-347 1945
service.vacuum.kn@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Mobil Customer Service
Emil-Hoffmann-Strasse 43
D-50996 Cologne-Suerth
Phone: +49-(0)221-347 1765
Fax: +49-(0)221-347 1944
service.vacuum.kn@oerlikon.com

Oerlikon
Leybold Vacuum
Dresden GmbH
Service Competence Center
Zur Wetterwarte 50, Haus 304
D-01109 Dresden
Service:
Phone: +49-(0)351-88 55 00
Fax: +49-(0)351-88 55 041
info.vacuum.dr@oerlikon.com

Europe

Belgium
Oerlikon
Leybold Vacuum Nederland B.V.
Belgisch bijkantoor
Leuvensesteenweg 542-9A
B-1930 Zaventem
Sales:
Phone: +32-2-711 00 83
Fax: +32-2-720 83 38
sales.vacuum.zv@oerlikon.com
Service:
Phone: +32-2-711 00 82
Fax: +32-2-720 83 38
service.vacuum.zv@oerlikon.com

France
Oerlikon
Leybold Vacuum France S.A.
7, Avenue du Québec
Z.A. de Courtaboeuf 1 - B.P. 42
F-91942 Courtaboeuf Cedex
Sales and Service:
Phone: +33-1-69 82 48 00
Fax: +33-1-69 07 57 38
info.vacuum.ctb@oerlikon.com
sales.vacuum.ctb@oerlikon.com

Oerlikon
Leybold Vacuum France S.A.
Valence Factory
640, Rue A. Bergès
B.P. 107 640
F-26501 Bourg-lès-Valence Cedex
Service:
Phone: +33-4-75 82 33 00
Fax: +33-4-75 82 92 69
marketing.vacuum.vc@oerlikon.com

Great Britain
Oerlikon
Leybold Vacuum UK LTD.
Silverglade Business Park
Leatherhead Road Unit 2
KT9 2QL Chessington, Surrey
(London)
Sales:
Phone: +44-13-7273 7300
Fax: +44-13-7273 7301
sales.vacuum.ln@oerlikon.com
Service:
Phone: +44-20-8971 7030
Fax: +44-20-8971 7003
service.vacuum.ln@oerlikon.com

Italy
Oerlikon
Leybold Vacuum Italia S.r.l.
Via Trasimeno 8
I-20128 Milano
Sales:
Phone: +39-02-27 22 31
Fax: +39-02-27 20 96 41
sales.vacuum.mi@oerlikon.com
Service:
Phone: +39-02-27 22 31
Fax: +39-02-27 22 32 17
service.vacuum.mi@oerlikon.com

Netherlands
Oerlikon
Leybold Vacuum Nederland B.V.
Proostwetering 24N
NL-3543 AE Utrecht
Sales and Service:
Phone: +31-(30) 242 6330
Fax: +31-(30) 242 6331
sales.vacuum.ut@oerlikon.com
service.vacuum.ut@oerlikon.com

Spain
Oerlikon
Leybold Vacuum Spain, S.A.
C/ Huelva 7
E-08940 Cornellà de Llobregat
(Barcelona)
Sales:
Phone: +34-93-666 43 11
Fax: +34-93-666 43 70
sales.vacuum.ba@oerlikon.com
Service:
Phone: +34-93-666 46 16
Fax: +34-93-685 43 70
service.vacuum.ba@oerlikon.com

Sweden
Oerlikon
Leybold Vacuum Scandinavia AB
Box 9084
SE-40092 Göteborg
Sales and Service:
Phone: +46-31-68 84 70
Fax: +46-31-68 39 39
info.vacuum.gt@oerlikon.com
sales.vacuum.gt@oerlikon.com
Visiting/delivery address:
Datavägen 57B
SE-43632 Askim

Switzerland
Oerlikon
Leybold Vacuum Schweiz AG
Leutschenbachstrasse 55
CH-8050 Zürich
Sales:
Phone: +41-44-308 40 50
Fax: +41-44-302 43 73
sales.vacuum.zh@oerlikon.com
Service:
Phone: +41-44-308 40 62
Fax: +41-44-308 40 60
service.vacuum.zh@oerlikon.com

America

USA
Oerlikon
Leybold Vacuum USA Inc.
5700 Mellon Road
USA-Export, PA 15632
Phone: +1-724-327-5700
Fax: +1-724-325-3577
info.vacuum.ex@oerlikon.com
Sales:
Eastern & Central time zones
Phone: +1-724-327-5700
Fax: +1-724-333-1217
Pacific, Mountain, Alaskan &
Hawaiian time zones
Phone: +1-408-436-2828
Fax: +1-408-436-2849
Service:
Phone: +1-724-327-5700
Fax: +1-724-325-3577

Latin America
Oerlikon
Leybold Vacuum USA Inc.
Brazilian Office
Av. Dória 360 cj. 12 Campo Belo
04635-070 São Paulo SP BRAZIL
Sales:
Phone: +55 11-3554 3117
Fax: +55 11-3554 3117
nelson.batistucci@oerlikon.com

Oerlikon
Leybold Vacuum GmbH
Bonner Strasse 498
D-50968 Cologne
Phone: +49-(0)221-347 0
Fax: +49-(0)221-347 1250
info.vacuum@oerlikon.com

Asia

P.R. China
Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Beichen Economic
Development Area (BEDA),
No.8 Western Shuangchen Road
Tianjin 300400
China
Sales and Service:
Phone: +86-22-2697 0808
Fax: +86-22-2697 4061
Fax: +86-22-2697 2017
info.vacuum.tj@oerlikon.com
sales.vacuum.tj@oerlikon.com
service.vacuum.tj@oerlikon.com

Oerlikon
Leybold Vacuum
(Tianjin) Co. Ltd.
Beichen Economic
Development Area (BEDA),
No.8 Western Shuangchen Road
Tianjin 300400
China
Sales and Service:
Phone: +86-22-2697 0808
Fax: +86-22-2697 4061
info.vacuum.tj@oerlikon.com
sales.vacuum.tj@oerlikon.com
service.vacuum.tj@oerlikon.com

Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Shanghai Branch:
No.33
76 Fu Te Dong San Road
Waigaoqiao Free Trade Zone
Shanghai 200131
China
Sales and Service:
Phone: +86-21-5064-4666
Fax: +86-21-5064-4668
info.vacuum.sh@oerlikon.com
sales.vacuum.sh@oerlikon.com
service.vacuum.sh@oerlikon.com

Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Guangzhou Office and
Service Center
1st F, Main Building
Science City Plaza,
No.111 Science Revenue,
Guangzhou Science City
(GZSC) 510663, Guangzhou,
China
Sales:
Phone: +86-20-223 23 980
Fax: +86-20-223 23 990
info.vacuum.gz@oerlikon.com
sales.vacuum.gz@oerlikon.com
service.vacuum.gz@oerlikon.com

Oerlikon
Leybold Vacuum (Tianjin)
International Trade Co. Ltd.
Beijing Branch:
1-908, Beijing Landmark Towers
8 North Dongsanhuan Road
Beijing 100004
China
Sales:
Phone: +86-10-6590-7622
Fax: +86-10-6590-7607
sales.vacuum.bj@oerlikon.com
service.vacuum.bj@oerlikon.com

India
Oerlikon
Leybold Vacuum India Pvt Ltd.
EL 22, J-Block
MIDC Bhosari
Pune 411026
India
Sales and Service:
Phone: +91-20-3061 6000
Fax: +91-20-2712 1571
sales.vacuum.pu@oerlikon.com
service.vacuum.pu@oerlikon.com

Japan
Oerlikon
Leybold Vacuum
Japan Co., Ltd.
Headquarter
23-3, Shin-Yokohama
3-chome
Tobu A.K. Bldg. 4th Floor
Kohoku-ku
Yokohama-shi 222-0033
Sales:
Phone: +81-45-471-3330
Fax: +81-45-471-3323
info.vacuum.yh@oerlikon.com
sales.vacuum.yh@oerlikon.com

Oerlikon
Leybold Vacuum
Japan Co., Ltd.
Osaka Sales Office
3F, Shin-Osaka Terasaki
No.3 Bldg.
1-5-28 Nishi-Miyahara
Yodogawa-ku, Osaka-shi
Osaka 532-0004
Phone: +81-6-6399-6271
Fax: +81-6-6399-6273
info.vacuum.os@oerlikon.com
sales.vacuum.os@oerlikon.com

Oerlikon
Leybold Vacuum
Japan Co., Ltd.
Tsukuba Technical Service Center
Kogyo Danchi
21, Kasuminosato,
Ami-machi, Inashiki-gun
Ibaraki-ken, 300-0315
Service:
Phone: +81-298 89 2841
Fax: +81-298 89 2838
info.vacuum.iik@oerlikon.com
sales.vacuum.iik@oerlikon.com

South Korea
Oerlikon
Leybold Vacuum Korea Ltd.
3F, Jellzone 2 Tower
Jeongja-dong 159-4
Bundang-gu Sungnam-si
Gyeonggi-do
Bundang 463-384, Korea
Sales:
Phone: +82-31 785 1367
Fax: +82-31 785 1359
sales.vacuum.bd@oerlikon.com

Service:
623-7, Upsung-Dong
Cheonan-Si
Chungcheongnam-Do
Korea 330-290
Phone: +82-41 589 3035
Fax: +82-41 588 0166
service.vacuum.cn@oerlikon.com

Singapore
Oerlikon
Leybold Vacuum
Singapore Pte Ltd.
1 Science Park Road
Singapore Science Park 2
#02-12, Capricorn Building
Singapore 117528
Sales and Service:
Phone: +65-6303 7000
Fax: +65-6773 0039
sales.vacuum.sg@oerlikon.com
service.vacuum.sg@oerlikon.com

Taiwan
Oerlikon
Leybold Vacuum Taiwan Ltd.
No 416-1, Sec. 3
Chungshin Road., Chutung
Hsinchu County 310
Taiwan, R.O.C.
Sales and Service:
Phone: +886-3-500 1688
Fax: +886-3-583 3999
sales.vacuum.hc@oerlikon.com
service.vacuum.hc@oerlikon.com

oerlikon
leybold vacuum
www.oerlikon.com/leyboldvacuum