

# LEYBOLD VACUUM

## FORELINE TRAPS

Inlet  
NW/KF40



For Leybold SC30 D Dry Scroll Vacuum Pumps

ISO Flange **NW40**

**Extend the Life of  
Your Vacuum Pump**

**Cut Maintenance Costs**

**Prevent System Downtime**



### APPLICATIONS & EQUIPMENT

- Foreline traps serve to prevent containments from entering the pump and protect the system from pump fluid or particulate migration. **(Backstreaming)**
- Prevent Dry Scroll Tip Seal Dust Migration
- Trap Condensable Vapors
- Rotary Vane Pump Protection
- Mist removal for Gear Box Venting
- Semi-Conductor Industry

### FEATURES & SPECIFICATIONS


- **Interchangeable Cartridge** provides for clean easy maintenance
- **Vacuum Level:** Typically  $1.3 \times 10^{-3}$  mbar ( $1 \times 10^{-3}$  mmhg)
- **ISO NW Flange Standard:** Easy release clamp flanges for use in foreline vacuum applications
- **Durable Corrosive Resistant** nickel chrome finish which prevents outgassing
- **Fully-Drawn Housing** with positive engagement ring technology

### FILTER MEDIA

- **Polyester Media:** 99% Efficient to 5 Microns
- **Stainless Steel Wire Mesh:** Corrosive resistant media, with large surface area, traps condensed particles & oil vapors
- **Activated Carbon Granule** Stops both particulate matter, gas or vapor odors and contaminants
- **Activated Alumina:** Long media life span and is very effective in preventing backstreaming and in trapping water & acid vapors (Lewis acids, polar compounds & other acids)

Parent Housing Without Media*	ISO Flg Inlet & Outlet	DIMENSIONS - inches			Rated Flow SCFM	
		A	B	C	Nominal Rating	Element Rating
P101861	NW25	4	2 3/16	3 3/4	18	25
P101866	<b>NW40</b>	6 3/4	4 1/2	7 5/16	80	115

SC30 D

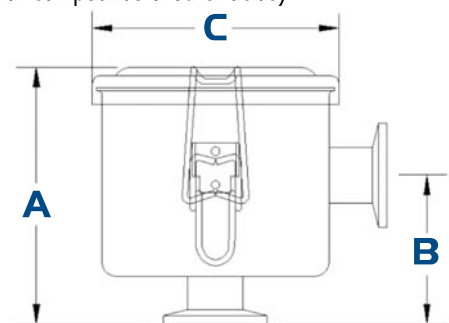

\*Media Sold Separately

AVAILABLE MEDIA OPTIONS				
	Polyester Media	S.S. Wire Mesh	Activated Carbon	Activated Alumina
NW25	P101862	P101863	P101864	P101865
<b>NW40</b>	P101867	P101885	P101868	P101869

SC30 D



idealtvac.com

505.872.0037