


Rotary Vane Vacuum Pump

2033 CFM 23.3
2063 CFM 42.4

2033 & 2063 PASCAL Series **adixen** ALCATEL **Rebuilt**

Alcatel Adixen Pascal Series 2033/63 A, C, C1, Rotary Vane Vacuum Pumps

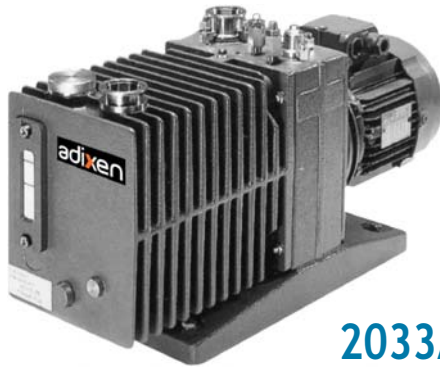

2033/63C C1

C C1 Series are the best answer to the most aggressive pumping environments. They incorporate specific anti corrosion features for improved reliable operation.
Designed and Prepared with PFPE Fluids.



2033/63A

A Series address the requirements of all major vacuum application for non-corrosive applications.

A - C - C1 PASCAL Series 2 Stages

Specifications		Units	2033A	2063A	2033C/C1	2063C/C1
Part Number			P10360	P10543	P101019	P101397
Rebuilt Prices (2008 List Prices)			\$2,250.00	\$2,595.00	\$2,650.00	\$3,650.00
Nominal pumping speed	50Hz	m ³ /h	30	60	30	60
	60Hz	cfm	23.3	42.4	23.3	42.4
Pneurop pumping speed	50Hz	m ³ /h	27	55	27	55
	60Hz	cfm	18.8	38	18.8	38
Ultimate partial pressure		mbar	2.10 ⁻⁴	3.10 ⁻⁴	3.10 ⁻⁴	3.10 ⁻⁴
Ultimate total pressure closed gas ballast		mbar	3.10 ⁻³	3.10 ⁻³	3.10 ⁻³	3.10 ⁻³
Ultimate total pressure open gas ballast		mbar	2.10 ⁻²	2.10 ⁻²	2.10 ⁻²	2.10 ⁻²
Water vapor capacity	50/60Hz	g/h	700	1200	700	1200
Water vapor pressure	50/60Hz	mbar	30	25	30	25
Weight (max)		kg (lbs)	61 (134)	93 (205)	74 (163)	98 (216)
Dimensions LxWxH		mm	701x213x422	819x264x422	701x213x447	819x264x447
Electrical motors 3 Phase	50Hz	VAC	220-415	220-415	220-415	220-415
	60Hz		220-480	220-480	220-480	220-480
Max nominal power rating 50/60Hz		kW	1.1/1.3	2.2/2.6	1.1/1.3	2.2/2.6
Min ambient temperature		°C (°F)	12 (54)	12 (54)	12 (54)	12 (54)
Max ambient temperature		°C (°F)	45 (113)	45 (113)	45 (113)	45 (113)
Oil capacity		liters	3.6	7	3.6	7
Inlet flange		ISO-KF	DN 40	DN 40	DN 40	DN 40
Exhaust flange		ISO-KF	DN 40	DN 40	DN 40	DN 40



[To Our Website
idealvac.com](http://idealvac.com)

Ideal Vacuum Products, LLC
2401B Phoenix Ave. NE
Albuquerque, NM 87107
Phone: (505) 872-0037
idealvac.com or pchemlabs.com

Accessories for 2033 and 2063 vacuum pumps



Alcatel 119 Oil
P/N P102102
1 Gallon \$29.00



Fomblin A113 PFPE Synthetic Fluid
P/N P102130 P/N P102132
1kg \$186.87 8kg \$1495.00



Tee Reducer
KF40 to KF25
P/N P101633
\$112.35



KF40 Half Nipple
P/N P101220
\$16.15



KF40 Full Nipple
P/N P101220
\$16.15



KF40 Toggle Clamp
P/N P101640
\$16.60



1 1/2 inch PVC Hose
P/N P101413
Per ft. \$11.00

Other sizes & variety of fittings IN STOCK

Oil Mist Eliminators (non-chemical)

Oil Mist eliminators retain oil mist contained in the exhausted gases with a high level of separation; an internal over pressure valve prevents exceeding the maximum exhaust pressure.

Heavy Duty Oil Mist Eliminator

material: body: carbon steel canister
with 1/4" drain cap, inlet port: 1 1/2" P/N P102588
weight: 5 lbs. Parent Flow 50 CFM
Price.....\$295.00
Adapter 1 1/2" inch to ISOKF40 P/N P101604
Price.....\$126.00
Replacement Cartridge (single): P/N P102626
Price.....\$48.50



Adapter 1 1/2" male NPT to KF40
1 1/2" female NPT inlet requires adapter male 1 1/2" to KF40 for use on Alcatel 2033 or 2063 vacuum pumps

OME 40 S Oil Mist Eliminator

material: body: aluminum
..... cartridge: epoxy/glass micro-fiber
weight: 0.9kg 1.9 lbs
inlet port/exhaust port: DN40 ISO-KF: P/N P102598
Price.....\$680.40
Replacement Cartridge (single): P/N P102595
Price.....\$63.00



Oil Mist Eliminators



OME 40 C1
For Applications involving corrosive gases
Except Fluorinated Gases.
material: body: stainless steel
..... cartridge: PTFE/glass micro-fiber
weight: 4.1kg 9 lbs
inlet port/exhaust port: DN40 ISO-KF: P/N 068785
Price.....\$1,764.00
Replacement Cartridge (single): P/N 068778
Price.....\$88.50

OME 40 C2
Suitable for corrosive applications involving Fluorinated Gases.
material: body: stainless steel
..... cartridge: polypropylene
weight: 4.1kg 9 lbs
inlet port/exhaust port: DN40 ISO-KF: P/N 068942
Price.....\$3,756.00
Replacement Cartridge (single): P/N 100802
Price.....\$637.50

DE External Oil Filters

DE FILTERS retain solid particles and/or neutralizes corrosive products contained in the oil of the pump. DE filters can be connected to any rotary vane pump from 5 m³/h to 100 m³/h; all necessary components for connexion are included.

DE Filter Media DE1(1 Cartridge) DE2(2 Cartridges)

- **Cellulose filter:** filtration of solid particles only
Applications: General Use
- **Activated alumina:** envelope/charge of activated alumina
Applications: mineral acids, Lewis acids, Polar compounds.
- **Activated charcoal:** envelope/charge of activated charcoal.
Applications: Chlorinated products, water and chlorine, Nitrous vapors, Ammonia.

[To Our Website](http://www.idealvac.com)
[idealvac.com](http://www.idealvac.com)



Ideal Vacuum Products, LLC
2401B Phoenix Ave. NE
Albuquerque, NM 87107
Phone: (505) 872-0037
idealvac.com or pchemlabs.com

● DE External Filters

	DE1	DE2
Price	\$5095.00	\$7260.00
weight kg/lbs	12/24.6	17/37.4
electrical supply	110/220V 50HZ	115/230V 60 HZ
oil flow hydrocarbon	1000 - 1500 cm ³ /mn	
synthetic	1000 cm ³ /mn at 65° C	
P/N 110/115V	068991	104375
220/230V	068990	104374

● Replacement Cartridges

Price	\$97.65	\$91.50	\$115.05
type	activated alumina	activated charcoal	cellulose
P/N	068880	068881	078212

standard (factory installed) cartridges are:
DE 1 : activated alumina
DE 2 : cellulose and activated alumina
oil volume : DE 1: 1.2 lit. - DE 2: 1.8 lit.