



Oil mist filter


Mounted on the pump's exhaust port, they prevent contamination of the air by oil mist. Satisfies the limits established by the German Clean Air Ordinance if a clean filter is employed (separation rate > 99.98 %).



ONF 25 S, oil mist filter for pumping speeds of up to 12 m³/h

- Sits on the pump's exhaust port and sustainably prevents contamination of the air by oil mist
- For pumping speeds of up to 12 m³/h
- DN 25 ISO-KF

Dimensions

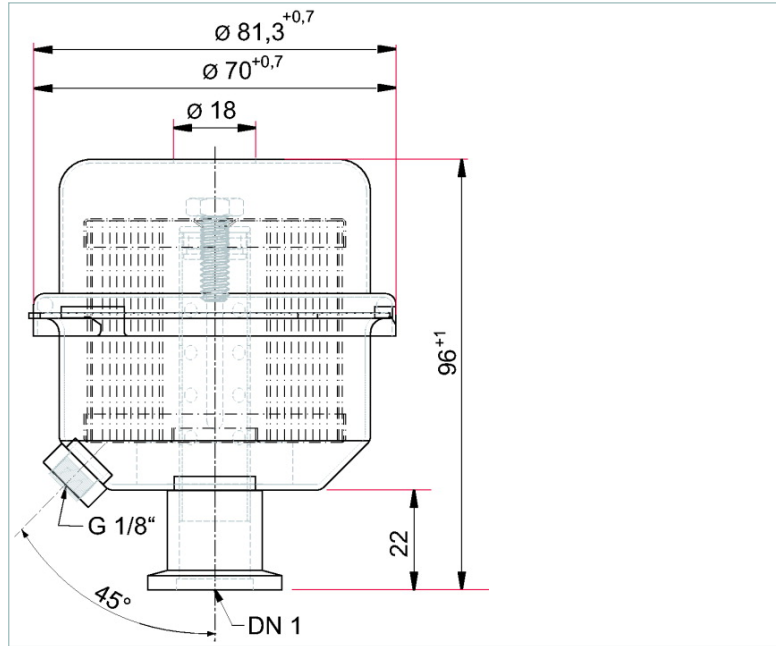

DN 1 DN 25 ISO-KF

Technical Data	ONF 25 S, oil mist filter for pumping speeds of up to 12 m³/h
Capacity	0.02 l
Degree of separation	99.98 %
Flange (in)	DN 25 ISO-KF
Flange (out)	No
For pumping speed	12 m³/h
Pressure max. (absolute)	1,500 hPa 1,125 Torr 1,500 mbar
Weight	0.35 kg 0.77 lb

Order number	
Oil mist filter	PK Z40 004

Accessories	
Accessories	
Oil return unit from ONF 16 S / ONF 25 S to Duo 5 M / Duo 10 M	PK 005 987 -T

**Vacuum solutions
from a single source**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

**Complete range
of products**

From a single component to complex systems:
We are the only supplier of vacuum technology
that provides a complete product portfolio.

**Competence in
theory and practice**

Benefit from our know-how and our portfolio of training
opportunities! We support you with your plant layout
and provide first-class on-site service worldwide.

**Are you looking for a
perfect vacuum solution?
Please contact us:**

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de
www.pfeiffer-vacuum.com