



Nor-Cal Products







by PFEIFFER VACUUM



Nor-Cal Products


where technology takes shape

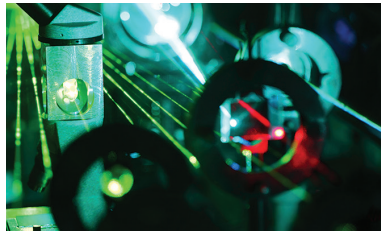

vacuum products catalog

Downstream Pressure Control

Section Four

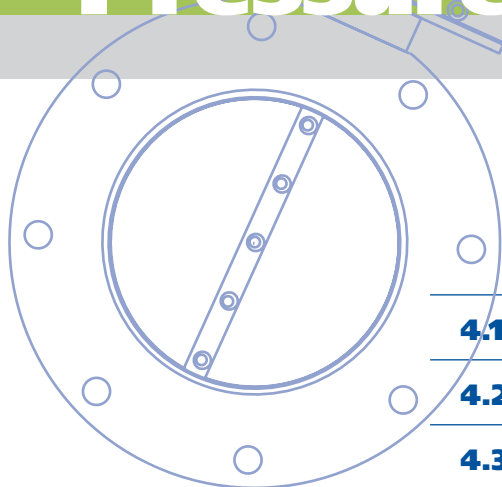

4.1	General Information	130
4.2	Throttling Butterfly Valves	131
4.3	Throttling Valve Heaters	134
4.4	Throttling Pendulum Valves	135
4.5	Adaptive Pressure Controllers	140
4.6	Capacitance Diaphragm Gauges	142
4.7	Accessories and Spare Parts	146

Nor-Cal Products

 by PFEIFFER VACUUM



Nor-Cal Products, Inc.
 1967 South Oregon St.
 Yreka, CA 96097 USA
 Tel: **800-824-4166**
 or 530-842-4457
 Fax: 530-842-9130
www.n-c.com

Sales Office
 3375 Scott Blvd., Ste. 100
 Santa Clara, CA 95054, USA
 Tel: **408-980-8992**
 Fax: 408-980-8947

Nor-Cal Europe Ltd.
 Suite D, Dittons Engineering Park
 Dittons Road
 Polegate BN26 6HY
 United Kingdom
 Tel: **+44(0)1323 810854**
www.nor-cal.eu

Nor-Cal Korea
 Gadong 2nd Floor, 531-8 Gajang-ro
 Osan-si, Gyeonggi-do,
 South Korea, 18103
 Republic of Korea
 Tel: **+82(0)31-222-6086**
 Fax: +82(0)31-8003-1342

Nor-Cal Products Asia Pacific Pte. Ltd.
 Serangoon Garden
 P. O. Box 428
 Singapore 915531
 Tel: **+65 6634-1228**
 Fax: +65 6634-1008

Intellisys™

ADAPTIVE PRESSURE CONTROL COMPONENTS

The Fastest, Most Precise Pressure Control System

Nor-Cal Products offers unequalled performance with Intellisys™ downstream pressure control products, providing measurable process benefits through higher resolution, speed and reliability. These benefits are the direct result of two core functions embedded in all Intellisys control systems.

First, a unique patented closed-loop motor control technology, which is a combination of electronics hardware and software, resides in every Intellisys controller. This allows Intellisys control valves to be operated at high rates of speed and with extremely fine positional resolution, while using standard off-the-shelf stepper motors.

Second, capitalizing on the high motor speed and fine resolution is an adaptive pressure control algorithm that yields near flawless pressure control performance over a wide range of system conditions without the need to "tune" or "learn" PID parameters.

Adding to the pressure control system benefits is a host of valve functions and features aimed at optimizing control performance and reliability. These include the selection of direct-, gear- and ball-screw driven valves that do not rely on notoriously unreliable mechanical or optical switches to determine the valve stroke end-points. Instead, bulletproof hard stops that are sensed by the closed-loop motor position feedback signals serve as the open and closed indicators.

Last, all Intellisys control valves, regardless of type, have been designed with controllability and conductance in mind. Optimally designed throttle plates and actuation mechanisms therefore provide an essential contribution to the overall behavior and performance of the downstream pressure control system.

Products

Every complete downstream pressure control system design incorporates three components including a throttle valve, valve controller and vacuum gauge. Nor-Cal Products has products available in all of these categories. The selection of throttling products includes families of butterfly and pendulum valves, as well as a number of special drives used to operate other types of fluid control devices. The choice of valve depends on the intended application, but each is available in a wide range of sizes and flange types with many optional functions and features, and all of them feature the closed-loop motor control capability that results in high speed and ultra-fine resolution.

Adaptive pressure controllers are available for each type of valve or valve drive, and generally come in two styles. The stand-alone buried box controllers are ideal for applications where expanded communications or user interfaces are desired. For installations where installation space is of concern, the on-valve IQ+ Series controllers may be a preferred choice. Regardless of type, all Intellisys controllers are powered by Digital Signal Processors (DSP) and have many available host communications interfaces such as RS-232, RS-485, DeviceNet, Ethernet, and Analog/TTL.

Nor-Cal Products capacitance diaphragm gauges (CDG) feature an ultra-stable ceramic diaphragm and advanced digital circuitry in all unheated and heated models. The gauges are available in all common ranges and can be supplied with most popular pipe fittings and connector types.




Throttling Butterfly Valves

High actuation speed and ultra-fine position resolution

The Intellisys throttling butterfly valves (TBV) are available in a wide range of sizes and flange types and come standard with compact and low-cost direct drives. More powerful geared drives are available to drive the larger valves, or even smaller ones when used in aggressive processes. All TBV styles use long time proven and reliable off-the-shelf stepper motors that deliver smooth operation, high actuation speed and ultra-fine position resolution. Different series and configurations exist to allow for operation in all types of downstream pressure control applications including those using very low flow combined with high control pressures. Intellisys TBVs are non-sealing and are unsuitable as isolation valves. When combined with an Intellisys controller, the fast response Nor-Cal Products TBVs enable vacuum systems to reach process pressures sooner, reducing cycle time and increasing throughput. Furthermore, the high precision valve movement assures pressure control accuracy at 0.25% of set point, and often well within. Available controllers for TBVs include the buried box APC-family and the on-valve IQ and IQ+ series.

Features and Benefits

- Higher system throughput
- Optimally designed throttle plates for improved controllability
- Smallest footprint available
- Direct drive motor for more compact and reliable design
- Fully serviceable valve motor subassembly
- 316 stainless steel and FKM seals on all wetted parts. Other seal materials are available.
- High open conductance
- Low closed conductance

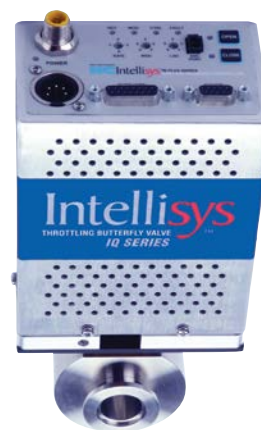

Intellisys Technology

Many users want to know more about the underlying closed-loop control technology that forms the backbone of Intellisys control systems. A detailed paper describing the technology at hand can be found at www.n-c.com/GainControl or by scanning this QR-code.



Alternatively, give our Intellisys technical support staff a call at **800-824-4166**.

Downstream Pressure Control

Throttling Butterfly Valves

SECTION 4.2





Direct Drive Throttling Butterfly Valves

MODEL NUMBER	NOMINAL ID	FLANGE TYPE	A	B	C	D	WEIGHT
TBVP-D-NW-25	DN 25	NW	2.25 (57.1)	2.75 (69.8)	6.68 (169)	0.87 (22.1)	5.50 (2.5)
TBVP-D-NW-40	DN 40	NW	2.25 (57.1)	2.75 (69.8)	6.68 (169)	1.39 (35.3)	5.30 (2.4)
TBVP-D-NW-50	DN 50	NW	2.00 (50.8)	3.36 (85.3)	6.99 (177)	1.98 (50.3)	5.50 (2.5)
TBVP-D-ISO-63	DN 63	ISO-F	1.00 (25.4)	5.12 (130)	7.44 (189)	2.44 (62.0)	7.50 (3.4)
TBVP-D-ISO-80	DN 80	ISO-F	1.00 (25.4)	5.71 (145)	7.76 (197)	2.94 (74.7)	8.80 (4.0)
TBVP-D-ISO-100	DN 100	ISO-F	1.00 (25.4)	6.50 (165)	8.19 (208)	3.85 (97.8)	9.50 (4.3)

Gear Drive Throttling Butterfly Valves

MODEL NUMBER	NOMINAL ID	FLANGE TYPE	A	B	C	D	WEIGHT
TBVP-G-ISO-160	DN 150	ISO-F	1.62 (41.1)	8.90 (226)	10.5 (266)	5.67 (144)	21.8 (9.9)
TBVP-G-ISO-200	DN 200	ISO-F	1.62 (41.1)	11.2 (284)	12.5 (317)	7.87 (199)	28.5 (12.9)
TBVP-G-ISO-250	DN 250	ISO-F	1.62 (41.1)	13.2 (335)	13.5 (342)	9.88 (250)	38.0 (17.3)

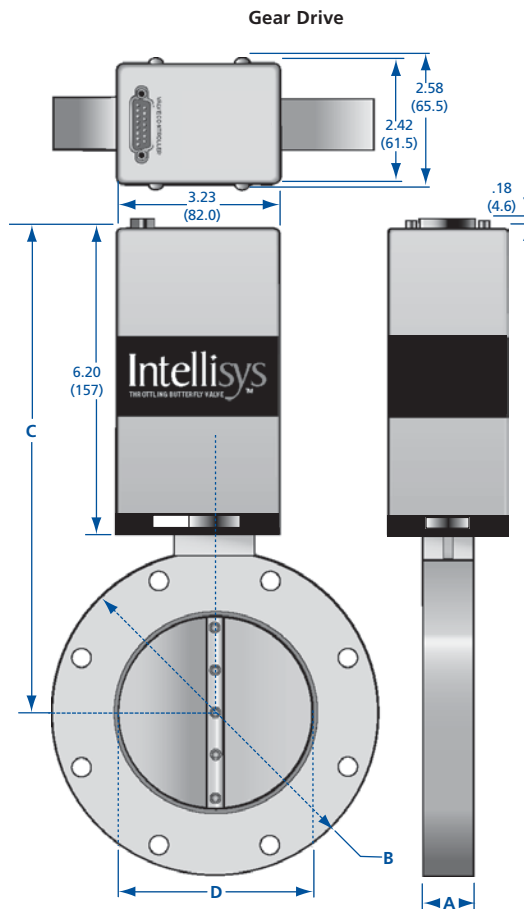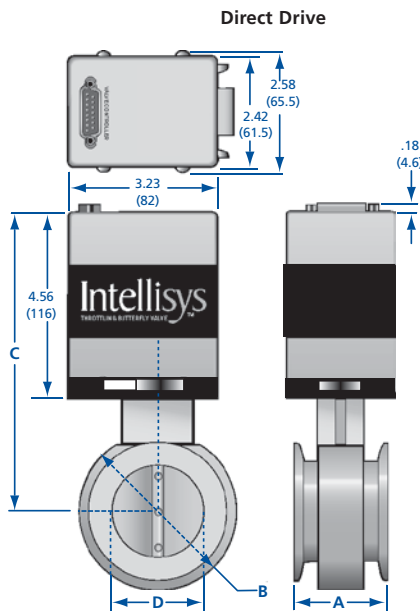

Seal Material Options

SEAL MATERIAL	CODE
FKM	Default (no code)
Kalrez 4079	-K79
Kalrez 8085	-K85
Kalrez 8575	-K75
Kalrez 9100	-K91
Chemraz E38	-C38
Dupra 192	-D19
Perlast G74P	-PP7

Example: TBVP-G-600-ISO-160-K75

Gear drive TBV with 6 inch bore, ISO 160 flanges and Kalrez 8575 O-rings.

SPECIFICATIONS

General

Compatible Controllers:

Direct drive: 200-series

Gear drive: 100-series buried box

Valve position: Visual indicator

Construction

Wetted materials: 316 stainless steel, seal material (see below)

Seals: FKM standard. Kalrez, Chemraz, Perlast and other materials available on request.

Operation

Motor power input: Supplied by BQC controller.

Differential pressure: 1.1 bar maximum across the valve plate

Forced heating capabilities: Valves may be heated up to 200°C with optional external heaters, provided seal and coupling material is specified to handle such temperatures.

Process gas temperature capabilities: For process gas temperatures in excess of 100°C, please consult with Nor-Cal Products Intellisys technical support for proper selection of seal materials and other design considerations.

Ambient operating conditions:

0 - 60°C @ 0 - 95% humidity

Leak rate: 1×10^{-9} mbar-liter/sec He

Inherent performance

Maximum speed: Open to closed in 125 msec (direct), 250 msec (geared)

Control resolution: 3.2 arc second (direct), 0.2 arc second (geared)

Maximum torque: 280 in-oz (direct), 2100 in-oz (geared)

Pressure Control Performance

(when used with an Intellisys controller)

Accuracy: The greater of 5 mV or 0.25% of reading

Repeatability: Within 2.5 mV or 0.12% of reading

Control range: 0.5% - 100% of the vacuum gauge range

Reliability

(99% confidence level, in clean environment)

O-ring cycle life: 5 million open-close cycles

MTBF: >50,000 hrs. continuous operation

Approvals

CE (EMC and machinery directives)

All dimensions are in inches (mm) & weights are in pounds (kg), unless otherwise noted.



Nor-Cal Products IQ+ controller is available on the complete line of regular and sealing Throttling Butterfly Valves (TBV and TBVS) turning what is very good performance into best-in-class process control. The IQ+ controller is an on-valve integral control & drive unit that is fully RoHS compliant with 100% lead-free circuit board content. User interfaces include an ODA certified DeviceNet protocol and physical layer, as well as standard RS-232 communications. Gauge power capabilities have been upgraded to a full 1500 mA at +/- 15 VDC in order to power two heated CDG's directly from the IQ+ unit. In addition, a battery backup feature is available that can be used to bring the valve to a fail-closed or fail-open safe position in the event of system power loss. Last, the IQ+ adaptive pressure control algorithm has been significantly improved to better deal with difficult control situations, in particular at conditions that typically occur at low pressures and low flows. For larger system pressure control requiring multiple pumps and fore-

lines, such as on flat panel, industrial coating or photovoltaic tools, it is easily possible to gang up to ten valves together. Multi-valve Master/Slave system control like this is facilitated via the Nor-Cal-Net intervalve communications system. One IQ+ operated valve serves as the master with communications to the host tool, gauge input and has direct command over the control position of the remaining slave valves. The IQ+ controlled butterfly valves are the right answer to any new or challenging pressure control application.

General

Connector options:
QPD: DeviceNet/RS232 interface
QPDB: DeviceNet/RS232 interface, with battery back-up
QPDG: DeviceNet/RS232 interface, with gauge power
QPDBG: DeviceNet/RS232 interface, with battery back-up and gauge power
 Contact the factory for other interfaces such as Analog, TTL, RS-485 and Ethernet.

Valve position: Visual indicator

Wetted materials: 316 stainless steel, seal material (see below)
Seals: FKM standard. Kalrez, Chemraz, Perlast and other materials available on request.

Power input: +24VDC
Differential pressure:
 1.1 bar maximum across the valve plate
Forced heating capabilities:
 Valves may be heated up to 150°C
 with optional external heaters

For process gas temperatures in excess of 100°C, please consult with Nor-Cal Intellisys technical support for proper selection of seal materials and other design considerations.

Leak rate: 1×10^{-9} mbar·liter/sec He

Open to close speed: 125 msec
Control resolution: 0.4 arc second
Maximum torque:
 DN-25 to DN-100 : 280 in-oz
 DN-160 to DN-320 : 700 in-oz

(when used with an Intellisys controller)

Algorithm: Improved for better stability and faster transitions
Accuracy: The greater of 5 mV or 0.25% of reading
Repeatability: Within 2.5 mV or 0.12% of reading
Control range: 0.5% - 100% of the vacuum gauge range

Reliability
(99% confidence level, in clean environment)


O-ring cycle life: 5 million open-close cycles
MTBF: >50,000 hrs. continuous

Approvals

RoHS compliant
ODVA certified DeviceNet
CE (*EMC and machinery directives*)

MODEL NUMBER	NOM. ID	FLANGE TYPE	A	B	C	D	WEIGHT
TBV-QPD-NW-25	DN 25	NW	2.25 (57.1)	2.75 (69.8)	8.34 (211)	0.87 (22.1)	5.50 (2.5)
TBV-QPD-NW-40	DN 40	NW	2.25 (57.1)	2.75 (69.8)	8.34 (211)	1.39 (35.3)	5.30 (2.4)
TBV-QPD-NW-50	DN 50	NW	2.00 (50.8)	3.36 (85.3)	8.65 (219)	1.98 (50.3)	5.50 (2.5)
TBV-QPD-ISO-63	DN 63	ISO-F	1.00 (25.4)	5.12 (130)	9.10 (231)	2.44 (62.0)	7.50 (3.4)
TBV-QPD-ISO-80	DN 80	ISO-F	1.00 (25.4)	5.71 (145)	9.42 (239)	2.94 (74.7)	8.80 (4.0)
TBV-QPD-ISO-100	DN 100	ISO-F	1.00 (25.4)	6.50 (165)	9.85 (250)	3.85 (97.8)	9.50 (4.3)
TBV-QPD-ISO-160	DN 150	ISO-F	1.62 (41.1)	8.90 (226)	10.4 (264)	5.87 (149)	21.8 (9.9)
TBV-QPD-ISO-200	DN 200	ISO-F	1.62 (41.1)	11.2 (284)	12.4 (315)	7.87 (199)	28.5 (12.9)
TBV-QPD-ISO-250	DN 250	ISO-F	1.62 (41.1)	13.2 (335)	13.3 (337)	9.88 (250)	38.0 (17.3)
TBV-QPD-ISO-320	DN 300	ISO-F	1.62 (41.1)	16.7 (424)	15.4 (389)	12.3 (312)	51.0 (23.2)

Note: OPD can be replaced with OPDB, OPDG and OPDBG

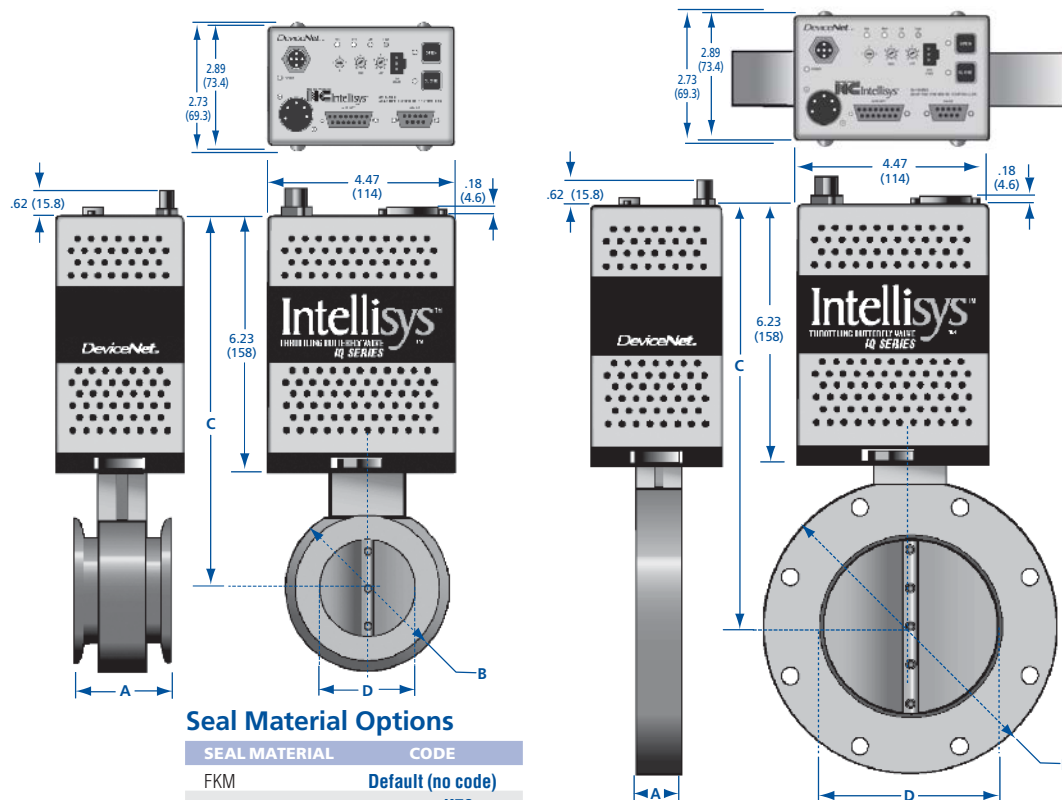

Seal Material Options

SEAL MATERIAL	CODE
FKM	Default (no code)
Kalrez 4079	-K79
Kalrez 8085	-K85
Kalrez 8575	-K75
Kalrez 9100	-K91
Chemraz E38	-C38
Dupra 192	-D19
Perlast G74P	-PP7

Example: **TBV-QPDBG-400-ISO-100-C38**
 IQ+ TBV with DeviceNet, battery
 backup, guage power, 4 inch bore
 ISO 100 flanges and Chemraz E38
 Q-rings.

All dimensions are in inches (mm) & weights are in pounds (kg), unless otherwise noted.

Downstream Pressure Control

Throttling Butterfly Valves

SECTION 4.2

NEW Performance Engineered IQ+ Throttling Butterfly Valves with J-Lock Seal Technology

The dynamic range, or controllable conductance, of these valves spans from 0.01 liter/sec at closed for the 40mm size up to 600 liter/sec using the 100mm size valve in the full open position. When combined with the Intellisys™ on-board IQ+ controller, the J-Lock TBV valves can be used to control chamber pressures up to 1 bar and beyond, even with very low gas flow rates. Some users combine the valve controls with a differential pressure gauge, which enables precise pressure control either just above or just below atmospheric pressure. The ultra-fine motor resolution of the IQ+ controller enables extremely precise valve plate movement resulting in very smooth and stable system pressures. The precision of the micro-stepping drive also enables the J-Lock TBV to be used as a soft-start or soft-pump valve whereby the chamber evacuation rate can be controlled to a constant

value (ex. 1 mbar/sec decay). Simply issue the rate value command to the controller and run it in evacuation pressure control mode. Process by-product mitigation is accomplished by heating the valve body, either by use of heater jackets

or integral cartridge heaters. The J-Lock TBV valve can be baked out to 120°C as long as precautions are taken to ensure the IQ+ controller does not exceed 45°C. Higher temperature options are available but require consultation with Nor-Cal Products' technical team.




MODEL NUMBER	NOM. ID	FLANGE TYPE	A	B	C	D	WEIGHT
TBJ-QP-NW-40	DN 40	NW-40	2.3 (58.4)	3.0 (76.2)	8.5 (215.9)	1.2 (30.5)	7.8 lbs. (3.5)
TBJ-QPA-NW-40	DN 40	NW-40	2.3 (58.4)	3.0 (76.2)	8.5 (215.9)	1.2 (30.5)	7.8 lbs. (3.5)
TBJ-QPD-NW-40	DN 40	NW-40	2.3 (58.4)	3.0 (76.2)	8.5 (215.9)	1.2 (30.5)	7.8 lbs. (3.5)

Features

- Patented design combines near foreline sealing with downstream pressure control
- Achieve high pressure control with minimal gas flow
- Avoid load lock condensation or particle generation by regulating evacuation rates
- Highest system throughput and fastest actuation speed
- Ultra-fine position resolution
- Reduced maintenance downtime
- CE marked / fully REACH and RoHS compliant
- Available in stainless steel with NW 40 flanges

Seal Material Options

SEAL MATERIAL	CODE
FKM	Default (no code)
Kalrez 4079	-K79
Kalrez 8085	-K85
Kalrez 8575	-K75
Kalrez 9100	-K91
Chemraz E38	-C38
Dupra 192	-D19
Perlast G74P	-PP7

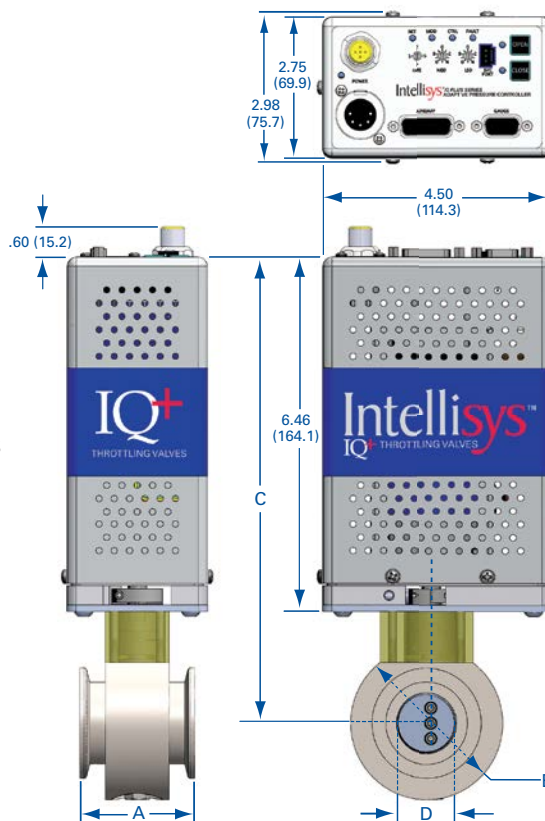

SPECIFICATIONS

General

Controller Types:

QP: RS232 interface
QPA: Analog TTL/ RS232 interface
QPD: DeviceNet/ RS232 interface
Contact the factory for other interfaces such as, RS-485 and Ethernet

Controller Options:

B: Battery back-up
G: Gauge power
 Example: **TBJ-QPDBG-NW-40:** DeviceNet/ RS232 interface, with battery back-up and gauge power

Construction

Body, Support Plate and Shaft: 316 stainless steel
J-Lock Seal Plate: PTFE (GL20)
Shaft Seals: FKM standard, Kalrez, Chemraz, Perlast and other materials available on request.

Operation

Power input: +24 VDC

Differential pressure:

1.1 bar maximum across the valve plate

Forced heating capabilities:

Valves may be heated up to 120°C with optional external heaters.

Process gas temperature capabilities:

For process gas temperatures in excess of 100°C, please consult with Nor-Cal Intellisys technical support for proper selection of seal materials and other design considerations.

Ambient operating conditions:

0 - 60°C @ 0 - 95% humidity

Leak rate: 1×10^{-9} mbar-liter/sec He

Inherent performance

Open to close speed: 625 msec

Control resolution: 0.1 arc second

Maximum torque:

DN-40 to DN-100: 1900 in-oz

Pressure Control Performance

(when used with an Intellisys controller)

Algorithm: Improved for better stability and faster transitions

Accuracy: The greater of 5 mV or 0.25% of reading

Repeatability: Within 2.5 mV or 0.12% of reading

Control range: 0.5% - 100% of the vacuum gauge range

Reliability

(99% confidence level, in clean environment)

O-ring cycle life: 5 million open-close cycles

J-Lock Seal life: 2.5 million open-close cycles

Approvals

RoHS compliant

ODVA certified DeviceNet

CE (EMC and machinery directives)

All dimensions are in inches (mm) & weights are in pounds (kg), unless otherwise noted.



Downstream Pressure Control

Throttle Valve Heaters

Throttle Valve Heaters

Many semiconductor processes are carried out in vacuum chambers with internal temperatures of several hundred degrees Celsius. Process by-products exit the chamber in vapor phase, but sublimate in the foreline and vacuum pump exhaust when gas temperatures drop sufficiently for them to form solids. The resultant buildup can increase wafer defects from particle backstreaming, reduce throughput of vacuum lines, impede the function of throttle valves and isolation valves, damage some dry pumps and reduce the efficiency of the scrubber. This buildup can be reduced or eliminated by heating vacuum lines and associated components from the chamber to the scrubber, or by using a combination of heaters and foreline traps, which collect the by-products preventing them from continuing downstream.

Heater jackets with a UL recognized electronic thermostat for fixed set-point applications is available for

temperatures up to 150°C. For fully adjustable temperature set-points up to 200 °C, a UR/CE certified heater with a Type K thermocouple and PID controller can provide precise temperature control. Standard heaters cover the entire valve body, and in the case of butterfly valves also the mating flanges. As such, heaters for NW-flanged TBV's are provided with special aluminum clamps.

Standard ½ inch (12.7mm) insulation add-on heaters are available for all Throttling Butterfly Valves. These can be purchased and installed separately provided that the valve is fitted with the proper high temperature seals and other thermally compatible components. Heaters for Throttling Pendulum Valves are integral to the valve, and must be ordered together. Field retrofit of a heater onto a TPV is not possible.

Special heater solutions or higher temperature control for all valves may be available. Call for details.



Heater Jacket Part Number and Ordering Information

Please use the following part numbering tree to specify the heater jacket to fit your throttling butterfly valve. *Note: All part number combinations may not be valid or available. Contact Nor-Cal Products for the latest pricing, availability and other options.*



Control Type

CONTROL TYPE	CODE
PID control*	HC
Electronic thermostat	HTE

* Requires separate PID controller. (See controllers Section 6.)

Valve Type

VALVE TYPE	CODE
Throttling butterfly	TBV

Valve Size

VALVE SIZE	CODE
1.00*	100
0.50*	150
2.00*	200
2.50	250
3.00	300
4.00	400
6.00	600
8.00	800
10.0	1000
12.0	1200

* Includes two special NW clamps

Temperature/Voltage

TEMPERATURE & VOLTAGE	CODE
HC type, 120 VAC	201
HC Type, 208 VAC	202
HTE type, 90°C, 120 VAC	091
HTE type, 90°C, 208 VAC	092
HTE type, 120°C, 120 VAC	121
HTE type, 120°C, 208 VAC	122
HTE type, 150°C, 120 VAC	151
HTE type, 150°C, 208 VAC	152

Example 1: HC-TBV-250-201 PID controlled jacket for 2.5 inch ID TBV. 120 VAC.

Downstream Pressure Control

Throttling Pendulum Valves (TPV)

SECTION 4.4



Unmatched Pressure Control Performance and Low Particle Generation

Nor-Cal Products' line of Intellisys pendulum valves provides equipment manufacturers with unmatched pressure control performance and low particle generation. Other pendulum valves use one actuation method to move the gate and another method to seal, creating an "out of control" area near the closed position. To compensate for this, system designers often add secondary bypass lines with costly throttling butterfly valves for high pressure, high flow regimes, such as NF₃ cleans. Intellisys pendulum valves utilize the same exclusive closed loop motor technology as other Nor-Cal Products control valves, but also feature a patented Penduroll actuator mechanism to move the sealing gate rapidly across the valve bore and transition to the axial direction. The result is precise pressure control over the entire valve stroke, most notably near the closed position. The Intellisys control system is the only choice for demanding 300mm Etch and CVD

applications which require fast, accurate pressure control across the entire range of critical process flows and chamber pressures.



The Intellisys closed loop motor control monitors and controls the exact position of the valve's gate mechanism. When combined with an Intellisys adaptive pressure controller, the pendulum valves provide up to 160 million steps of positional resolution to position the gate exactly where it needs to be to control pressure or to seal. In addition, the Nor-Cal Products control system's speed of actuation is unequalled in providing optimal transient response, pressure set-point stability and overall process improvement. The APC's adaptive algorithm outperforms "learn modes" by optimizing phase and gain settings in real time during varying chamber pressure and flow conditions. In-situ serviceability of the valve is made possible through the incorporation of a removable bonnet cover. The entire gate assembly and

sealing O-ring can be accessed without removing the valve from the system, making regular inspections, cleanings and O-ring replacements quick and easy.

Nor-Cal Products also offers pneumatically actuated isolation pendulum valves that contain the same patented Penduroll mechanism that is found in the throttling valves. For more information about these valves, please refer to the Isolation Valves section of this catalog.

Features and Benefits


- Space saving, low cost design
- Low particle generation
- High reliability
- Easy maintenance, split body allows O-ring replacement without removing valve from system
- Body can be heated up to 150°C with optional heater jackets
- Available in ISO and JIS flange styles

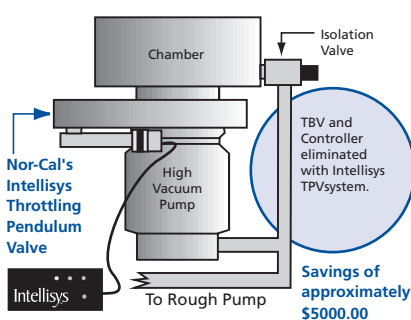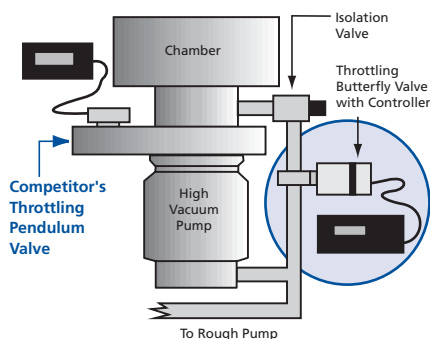



Downstream Pressure Control


Throttling Pendulum Valves

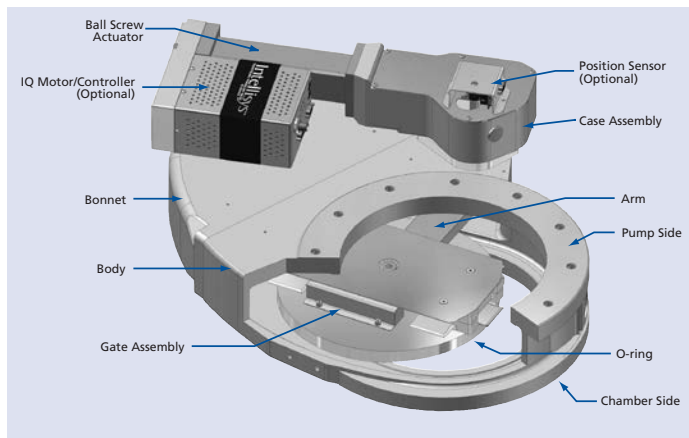

TPV Part Number and Ordering Information

Please use the following part numbering tree to add the appropriate options for a TPV to fit your application.

Note: All part number combinations may not be valid. Contact Nor-Cal Products for the latest pricing, availability and other options.



Heater Options

HEATER OPTIONS	OPERATION	CODE
None		<i>Leave blank</i>
90°C thermostat	120 VAC	HT091
120°C thermostat	120 VAC	HT121
150°C thermostat	120 VAC	HT151
90°C thermostat	208 VAC	HT092
120°C thermostat	208 VAC	HT122
150°C thermostat	208 VAC	HT152

Seal Material Options

SEAL MATERIAL	CODE
FKM	<i>Leave blank</i>
Kalrez 4079	-K79
Kalrez 8085	-K85
Kalrez 8575	-K75
Kalrez 9100	-K91
Chemraz E38	-C38
Dupra 192	-D19
Perlast G74P	-PP7

Other Options

OTHER OPTIONS	CODE
Motor actuator position R* (default)	<i>Leave blank</i>
Motor actuator position T*	T
Pump-out port (NW-16 size on DN160 and DN200 NW-40 size on DN250, DN320 and DN35)	U
Open / closed position indicators (Optical with indicating LEDs)	W
Mirror image body configuration	Z
*See dimension diagram on facing page	

Example 1: TPV-800-ISO-200-MB-HT122-K79-T

TPV with 8 inch ISO flanges, bright dipped aluminum, heated to 120°C with thermostat control, 208 VAC operation, Kalrez 4079 compound O-ring material and motor actuator in T position

Example 2: TPV-QPDB-ISO-250-C38

IQ+ TPV with DeviceNet and battery backup, 10 inch ISO flanges and E38 Chemraz O-ring material.

Body Materials Available

Standard TPV bodies are cast aluminum that have been either bright dipped or hard anodized. Some sizes are machined and either bright dipped or hard anodized. The model number denotes the body material and surface treatment used for each size.

Note: Some sizes are not available in both machined and cast bodies.

BODY MATERIAL	CODE
Cast bright dipped aluminum	<i>Default</i>
Cast Type III hard anodize	HA
Machined bright dipped aluminum	MB
Machined Type III hard anodize	HM

All dimensions are in inches (mm) & weights are in pounds (kg), unless otherwise noted.

Downstream Pressure Control

Throttling Pendulum Valves


SECTION 4.4



Throttling Pendulum Valves

MODEL NUMBER	NOM. ID	FLANGE TYPE	A	B	C	D	E	F	N	M	L	WEIGHT
TPVP-ISO-160-MB	DN 160	ISO-F	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPVP-ISO-160-HM	DN 160	ISO-F	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPVP-ISO-200-MB	DN 200	ISO-F	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	12	M10	(10.0)	49.0 (22.2)
TPVP-ISO-200-HM	DN 200	ISO-F	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	12	M10	(10.0)	49.0 (22.2)
TPVP-ISO-250	DN 250	ISO-F	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M10	(10.0)	62.0 (28.1)
TPVP-ISO-250-HA	DN 250	ISO-F	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M10	(10.0)	62.0 (28.1)
TPVP-ISO-320	DN 320	ISO-F	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPVP-ISO-320-HA	DN 320	ISO-F	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPVP-JFF-150-MB	DN 150	JIS	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPVP-JFF-150-HM	DN 150	JIS	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPVP-JFF-200-MB	DN 200	JIS	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	8	M12	(12.0)	49.0 (22.2)
TPVP-JFF-200-HM	DN 200	JIS	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	8	M12	(12.0)	49.0 (22.2)
TPVP-JFF-250	DN 250	JIS	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M12	(12.0)	62.0 (28.1)
TPVP-JFF-250-HA	DN 250	JIS	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M12	(12.0)	62.0 (28.1)
TPVP-JFF-300	DN 300	JIS	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123.0 (55.8)
TPVP-JFF-300-HA	DN 300	JIS	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123.0 (55.8)
TPVP-JFF-350	DN 350	JIS	4.92 (125)	4.06 (103)	32.3 (820)	22.0 (559)	12.2 (310)	12.8 (325)	12	M12	(18.0)	143.0 (64.9)
TPVP-JFF-350-HA	DN 350	JIS	4.92 (125)	4.06 (103)	32.3 (820)	22.0 (559)	12.2 (310)	12.8 (325)	12	M12	(18.0)	143.0 (64.9)

Note: **N**=Number bolt holes **M**=Thread bolt diameter **L**=Thread depth

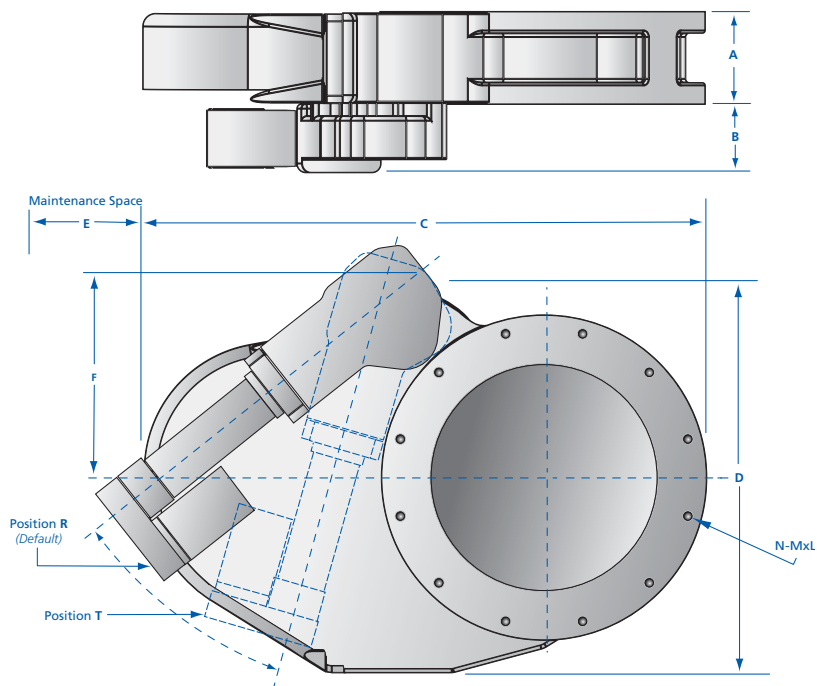

SPECIFICATIONS

General

Compatible controllers: 800-series APC buried box controllers

Construction

Wetted materials

Body: Cast aluminum A356.0 (machined billet aluminum 6061-T6 in 8" size)

Valve plate: Aluminum 6061-T6

Other parts: A6061, A7075, SS304, SS316,

Inconel X-750 and FKM

Seals: FKM standard. Kalrez, Chemraz,

Perlast and other materials available

Body and plate surface treatment: Bare aluminum standard, hard Type III anodizing optional

Operation

Motor power input: Supplied by BQC controller. Refer to APC section.

Differential pressure:

With valve fully sealed: 1.1 bar maximum across the valve plate

While opening the valve

27 mbar (DN160 and DN200)

32 mbar (DN250)

39 mbar (DN320 & DN350)

Operating pressure: 3.8×10^{-8} to 1 bar

Heating or bakeout capabilities:

Body: 150°C maximum with optional heater kits

Actuator: 60°C maximum

Ambient operating conditions:

0 - 60°C @ 0 - 95% humidity, noncondensing

Leak rate: 1×10^{-9} mbar-liter/sec He with FKM

seals across seat and to atmosphere

(1×10^{-6} mbar-liter/sec He for hard anodized body or gate)

Derated with some perfluoro-elastomers

Inherent performance

Maximum speed: Open to closed in 2 to 5 seconds, depending on size

Control resolution: 16 to 40 million steps, open to closed, depending on size

Pressure control performance

(when used with an Intellisys controller)

Accuracy: The greater of 5 mV or 0.25% of reading

Repeatability: Within 2.5 mV or 0.12% of reading

Control range: 0.5% - 100% of the vacuum gauge range

Reliability

(99% confidence level, in clean environment)

O-ring cycle life: 1 million cycles open to control closed. 200K cycles open to fully closed.

MTBF: >10,000 hrs. continuous operation

Approvals

CE (EMC and machinery directives)

Options

Body & seal material, drive & heater (see options page this section)

JIS Flange O-Rings

SIZE	O-RINGS
150	OR-JIS-150
200	OR-JIS-200
250	OR-JIS-250
320	OR-JIS-320
350	OR-JIS-350



Downstream Pressure Control

Throttling Pendulum Valves

SPECIFICATIONS

General

Controller Options:

IQA: Analog / TTL / RS232 interface
 IQD: DeviceNet / RS232 interface
 IQD2: DeviceNet / RS232 interface, no power via DN connector
 IQE: Ethernet / RS232 interface
 IQR: RS485 interface

Construction

Wetted materials:

Body: Cast aluminum A356.0 (machined billet aluminum 6061-T6 in 8" size)
 Valve plate: Aluminum 6061-T6
 Other parts: A6061, A7075, SS304, SS316, Inconel X-750 and FKM
 Seals: FKM standard. Kalrez, Chemraz, Perlast and other materials available
 Body and plate surface treatment: Bare aluminum standard, hard Type III anodizing optional

Operation

IQ controller power input: +24 VDC, +/- 10%

Differential pressure:

With valve fully sealed: 1.1 bar maximum across the valve plate

While opening the valve:

27 mbar (DN160 & DN200);

32 mbar (DN250);

29 mbar (DN320 & DN350)

Operating pressure: 3.8×10^{-8} to 1 bar

Heating or bakeout capabilities:

Body: 150°C maximum with optional heater kits

Actuator: 60°C maximum

Ambient operating conditions:

0 - 45°C @ 0 - 95% humidity, non-condensing

Leak rate: 1×10^{-9} mbar-liter sec⁻¹ He FKM seals

across seat and to atmosphere (1×10^{-6}

mbar-liter sec⁻¹ He for hard anodized

body or gate). Derated with some

perfluoro-elastomers.

Inherent performance

Maximum speed: Open to closed in 2 to 5

seconds, depending on size

Control resolution: 16 to 40 million steps,

open to closed, depending on size

Pressure control performance

(when used with an Intellisys controller)

Accuracy: The greater of 5mV or 0.25%

of reading

Repeatability: Within 2.5mV or 0.12%

of reading

Control range: 0.5% - 100% of the vacuum

gauge range

Reliability (99% confidence

level, in clean environment)

O-ring cycle life:

1 million cycles open to control closed.

200K cycles open to fully closed.

MTBF: >10,000 hrs. continuous operation

Approvals

CE (EMC and machinery directives)

Options Body and seal material, drive and heater (see options page this section)


All dimensions are in inches (mm) & weights are in pounds (kg), unless otherwise noted.

IQ Throttling Pendulum Valves

MODEL NUMBER	NOM. ID	FLANGE TYPE	A	B	C	D	E	F	N	M	L	WEIGHT
TPV-IQA-600-ISO-160-MB	DN 160	ISO-F	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-IQA-600-ISO-160-HM	DN 160	ISO-F	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-IQA-800-ISO-200-MB	DN 200	ISO-F	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	12	M10	(10.0)	49.0 (22.2)
TPV-IQA-800-ISO-200-HM	DN 200	ISO-F	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	12	M10	(10.0)	49.0 (22.2)
TPV-IQA-1000-ISO-250	DN 250	ISO-F	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M10	(10.0)	62.0 (28.1)
TPV-IQA-1000-ISO-250-HA	DN 250	ISO-F	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M10	(10.0)	62.0 (28.1)
TPV-IQA-1200-ISO-320	DN 320	ISO-F	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-IQA-1200-ISO-320-HA	DN 320	ISO-F	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-IQA-600-JIS-150-MB	DN 150	JIS	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-IQA-600-JIS-150-HM	DN 150	JIS	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-IQA-800-JIS-200-MB	DN 200	JIS	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	8	M12	(12.0)	49.0 (22.2)
TPV-IQA-800-JIS-200-HM	DN 200	JIS	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	8	M12	(12.0)	49.0 (22.2)
TPV-IQA-1000-JIS-250	DN 250	JIS	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M12	(12.0)	62.0 (28.1)
TPV-IQA-1000-JIS-250-HA	DN 250	JIS	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M12	(12.0)	62.0 (28.1)
TPV-IQA-1200-JIS-300	DN 300	JIS	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-IQA-1200-JIS-300-HA	DN 300	JIS	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-IQA-1400-JIS-350	DN 350	JIS	4.92 (125)	4.06 (103)	32.3 (820)	22.0 (559)	12.2 (310)	12.8 (325)	12	M12	(18.0)	143 (64.9)
TPV-IQA-1400-JIS-350-HA	DN 350	JIS	4.92 (125)	4.06 (103)	32.3 (820)	22.0 (559)	12.2 (310)	12.8 (325)	12	M12	(18.0)	143 (64.9)

NOTE: IQA can be replaced with IQD, IQD2, IQE and IQR

N=Number bolt holes M=Thread bolt diameter L=Thread depth

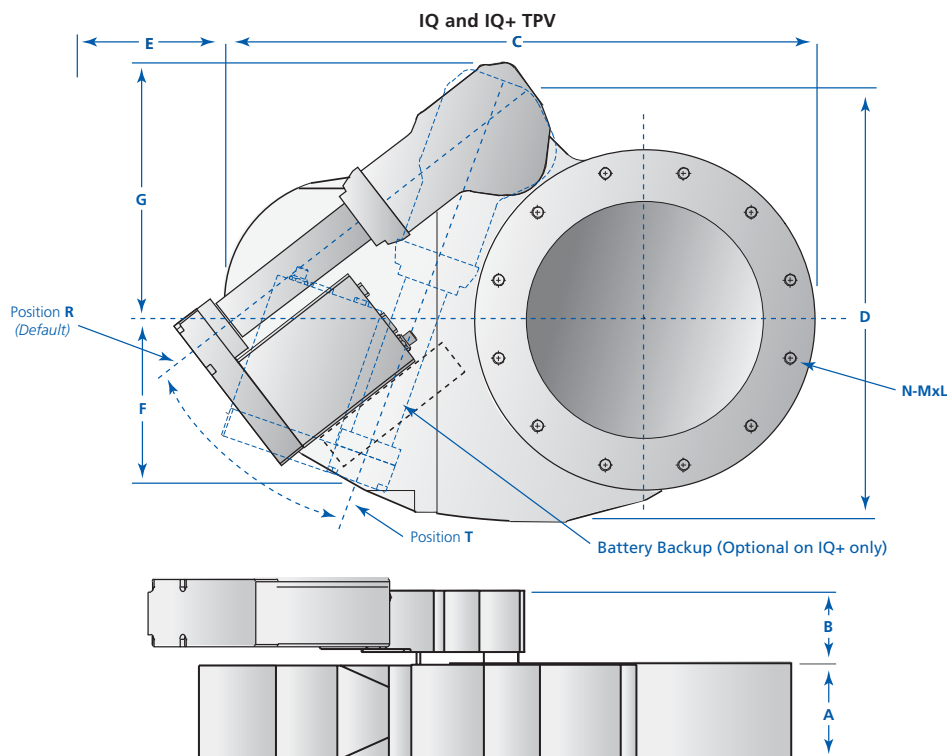

Downstream Pressure Control


Throttling Pendulum Valves

SECTION 4.4



IQ+ Throttling Pendulum Valves

Nor-Cal Products IQ+ controller is available on the complete line of Throttling Pendulum Valves (TPV) turning what is very good performance into best-in-class process control. The IQ+ controller is an on-valve integral control and drive unit that is fully RoHS compliant with 100% lead-free circuit board content. User interfaces include an ODVA certified DeviceNet protocol and physical layer, as well as standard RS-232 communications. Gauge power capabilities have been upgraded to a full 1500 mA at +/- 15 VDC in order to power two heated CDG's directly from the IQ+ unit.

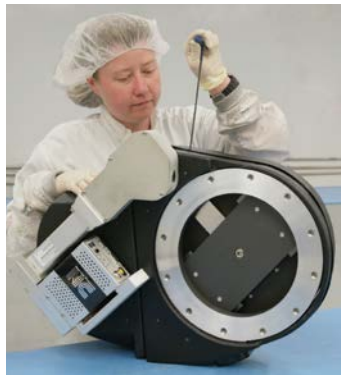

In addition, a battery back-up feature is available that can be used to bring the valve to a fail-closed or fail-open safe position in the event of system power loss. Last, the IQ+ adaptive pressure control algorithm has been significantly improved to better deal with difficult control situations, in particular at conditions that typically occur at low pressures and low flows. For larger system pressure control requiring multiple pumps and forelines, such as on flat panel, industrial coating or photovoltaic tools, it is easily possible to gang up to ten valves together. Multi-valve Master/Slave system control like this is facilitated via the Nor-Cal-Net intervalve communications system. One IQ+ operated valve serves as the master with communications to the host tool, gauge input and has direct command over the control position of the remaining slave valves. The IQ+ controlled pendulum valves are the right answer to any new or challenging pressure control application.

MODEL NUMBER	NOM. ID	FLANGE TYPE	A	B	C	D	E	F	N	M	L	WEIGHT
TPV-QPD-ISO-160-MB	DN 160	ISO-F	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-QPD-ISO-160-HM	DN 160	ISO-F	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-QPD-ISO-200-MB	DN 200	ISO-F	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	12	M10	(10.0)	49.0 (22.2)
TPV-QPD-ISO-200-HM	DN 200	ISO-F	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	12	M10	(10.0)	49.0 (22.2)
TPV-QPD-ISO-250	DN 250	ISO-F	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M10	(10.0)	62.0 (28.1)
TPV-QPD-ISO-250-HA	DN 250	ISO-F	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M10	(10.0)	62.0 (28.1)
TPV-QPD-ISO-320	DN 320	ISO-F	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-QPD-ISO-320-HA	DN 320	ISO-F	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-QPD-JFF-150-MB	DN 150	JIS	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-QPD-JFF-150-HM	DN 150	JIS	3.15 (80.0)	3.78 (96.0)	15.9 (403)	12.2 (310)	5.31 (135)	8.50 (216)	8	M10	(10.0)	40.0 (18.0)
TPV-QPD-JFF-200-MB	DN 200	JIS	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	8	M12	(12.0)	49.0 (22.2)
TPV-QPD-JFF-200-HM	DN 200	JIS	3.46 (87.9)	3.78 (96.0)	19.9 (506)	14.4 (266)	6.50 (165)	9.29 (236)	8	M12	(12.0)	49.0 (22.2)
TPV-QPD-JFF-250	DN 250	JIS	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M12	(12.0)	62.0 (28.1)
TPV-QPD-JFF-250-HA	DN 250	JIS	3.94 (100)	3.78 (96.0)	23.8 (605)	16.6 (422)	8.46 (215)	9.49 (241)	12	M12	(12.0)	62.0 (28.1)
TPV-QPD-JFF-300	DN 300	JIS	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-QPD-JFF-300-HA	DN 300	JIS	4.72 (120)	4.06 (103)	30.2 (767)	22.0 (559)	10.6 (269)	12.8 (325)	12	M12	(18.0)	123 (55.8)
TPV-QPD-JFF-350	DN 350	JIS	4.92 (125)	4.06 (103)	32.3 (820)	22.0 (559)	12.2 (310)	12.8 (325)	12	M12	(18.0)	143 (64.9)
TPV-QPD-JFF-350-HA	DN 350	JIS	4.92 (125)	4.06 (103)	32.3 (820)	22.0 (559)	12.2 (310)	12.8 (325)	12	M12	(18.0)	143 (64.9)

NOTE: QPD can be replaced with QPDB, QPDG and QPDBG

N=Number bolt holes M=Thread bolt diameter L=Thread depth

JIS Flange O-Rings

SIZE	O-RINGS
150	OR-JIS-150
200	OR-JIS-200
250	OR-JIS-250
300	OR-JIS-300
350	OR-JIS-350

SPECIFICATIONS

General

Controller Options:

QPD: DeviceNet/RS232 interface
QPDB: DeviceNet/RS232 interface, with battery backup

QPDG: DeviceNet/RS232 interface, with gauge power

QPDBG: DeviceNet/RS232 interface, with battery backup and gauge power
Contact the factory for other interfaces, such as Analog, TTL, RS-485 and Ethernet.

Construction

Wetted materials

Body: Cast aluminum A356.0 (machined billet aluminum 6061-T6 in 8 inch size)

Valve plate: Aluminum 6061-T6
Other parts: A6061, A7075, SS304, SS316,

Inconel X-750 and FKM

Seals: FKM standard. Kalrez, Chemraz, Perlast and other materials available

Body and plate surface treatment:

Bare aluminum standard, hard Type III anodizing optional

Operation

Power input: +24 VDC

Differential pressure:

With valve fully sealed: 1.1 bar maximum across the valve plate

While opening the valve:

27 mbar (DN160 and DN200)

32 mbar (DN250)

39 mbar (DN320 & DN350)

Operating pressure: 3.8×10^{-8} to 1 bar

Heating or bakeout capabilities:

Body: 150°C maximum with optional heater kits

Actuator: 60°C maximum

Ambient operating conditions:

0 - 45°C @ 0 - 95% humidity, non-condensing

Leak rate:

1×10^{-9} mbar-liter/sec He with FKM seals across seat and to atmosphere

(1×10^{-6} mbar-liter/sec He for hard anodized body or gate)

Derrated with some perfluoro-elastomers

Downstream Pressure Control

Adaptive Pressure Controllers



General

Construction material
Chassis: 5052-aluminum
Power input: +24 VDC \pm 10%, 100W max (600W nominal) power input
Battery back-up: Optional
Ambient operating conditions:
0-45°C @ 0-95% humidity, non-condensing

System interface

Serial communication: RS-232 or RS-485 on DB-15 female connector
Analog/TTL communication:
Four (4) analog I/O and seven (7) TTL I/O on DB-25 female connector
DeviceNet communication:
Micro-style 5-pin male connector
Analog setpoint input:
0-10 or 0-5 VDC linearly proportional to pressure or valve position
Pressure output: 0-10 VDC analog output proportional to pressure, one for each vacuum gauge attached
Valve position output: 0-10 VDC or 0-5 VDC analog output proportional to valve position

Device interface

Gauge connection: Differential analog signal input with \pm 15 VDC power output to one or two gauges
Valve connection: DB-15 female connector provides power and transmits position information required to operate the high performance valve

User Interface

Switches: Valve open & close, and multi-position rotary switches for communications settings
Indicating LEDs:
Power, Fault, Control, Valve open and closed, DeviceNet: Mod and Net

Pressure Control Performance

Accuracy: The greater of 5 mV or 0.25% of reading
Repeatability: Within 2.5 mV or 0.12% of reading
Control range: 0.5% - 100% of the vacuum gauge range
Reliability:
(99% confidence level in clean environment)
MTBF: >50,000 hours continuous operation

Approvals

CE (EMC and Low Voltage Directives)
NRTL (United States)
SCC (Canada)
EU Directives (Europe)


Advanced Control System Performance

The Intellisys Adaptive Pressure Controller (APC) provides advanced control system performance by combining closed loop motor control with adaptive pressure control. PCs are available in two basic configurations – the buried box style and the new on-valve IQ-series. The patented closed loop motor control technology, found at the core of the Intellisys controller technology, results in 250 times greater motor positional resolution at 10-20 times the speed compared to other existing technologies. The adaptive pressure control algorithm eliminates pressure over and undershoots as well as ringing during process step transitions.

APC controllers are available for all of Nor-Cal Products Intellisys control valves and drives, and can be supplied with auto-ranging AC, or low voltage DC power supplies. Depending on the model and intended valve operation, users can choose from additional optional features such as battery back-up, local and remote displays and a range of communication modes including Analog/TTL, RS-232 and RS-485 serial, as well as DeviceNet.


Low Voltage Controllers

MODEL NUMBER	FOR USE WITH	BATTERY BACK-UP	WEIGHT
BQC-100L-A	Geared Butterfly Valves (TBVP-G-xxx)	NO	1.6 (0.7)
BQC-100L-AB	Geared Butterfly Valves (TBVP-G-xxx)	YES	2.5 (1.1)
BQC-200L-A	Direct Drive Butterfly Valves (TBVP-D-xxx)	NO	1.6 (0.7)
BQC-200L-AB	Direct Drive Butterfly Valves (TBVP-D-xxx)	YES	2.5 (1.1)
BQC-800L-A	Pendulum Valves (TPVP-xxx)	NO	1.6 (0.7)
BQC-800L-AB	Pendulum Valves (TPVP-xxx)	YES	2.5 (1.1)

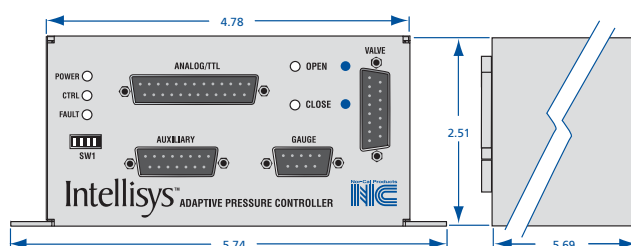

Low Voltage Controllers with DeviceNet

MODEL NUMBER	FOR USE WITH	BATTERY BACK-UP	WEIGHT
BQC-100L-D	Geared Butterfly Valves (TBVP-G-xxx)	NO	1.6 (0.7)
BQC-100L-DB	Geared Butterfly Valves (TBVP-G-xxx)	YES	2.5 (1.1)
BQC-200L-D	Direct Drive Butterfly Valves (TBVP-D-xxx)	NO	1.6 (0.7)
BQC-200L-DB	Direct Drive Butterfly Valves (TBVP-D-xxx)	YES	2.5 (1.1)
BQC-800L-D	Pendulum Valves (TPVP-xxx)	NO	1.6 (0.7)
BQC-800L-DB	Pendulum Valves (TPVP-xxx)	YES	2.5 (1.1)

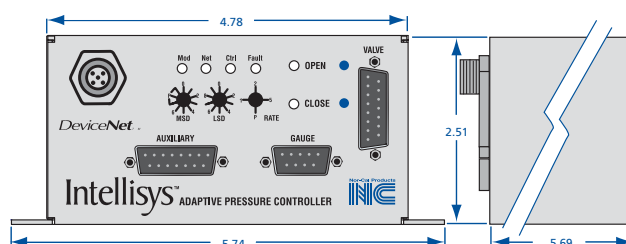

All dimensions are in inches (mm) & weights are in pounds (kg), unless otherwise noted.

Downstream Pressure Control


Adaptive Pressure Controllers

SECTION 4.5




A/C Adaptive Pressure Controllers

MODEL NUMBER	FOR USE WITH	BATTERY BACK-UP	WEIGHT
APC-100-A	Gearred Butterfly Valves (TBV-G-xxx)	NO	3.5 (1.6)
APC-200-A	Direct Drive Butterfly Valves (TBV-D-xxx)	NO	3.5 (1.6)
APC-800-A	Pendulum Valves (TPV-xxx)	NO	3.5 (1.6)

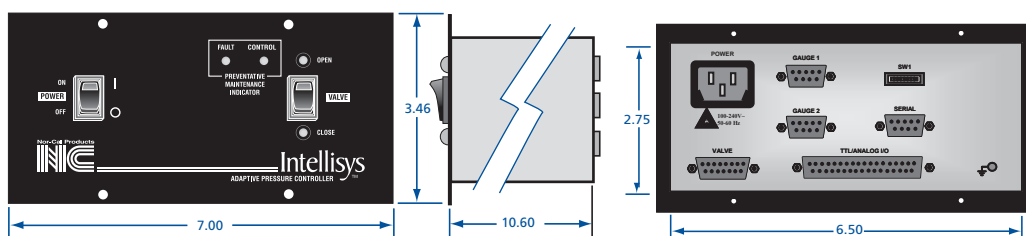

A/C Adaptive Pressure Controllers with Touch Screen

MODEL NUMBER	FOR USE WITH	BATTERY BACK-UP	WEIGHT
APC-150-A	Gearred Butterfly Valves (TBV-G-xxx)	NO	4.2 (1.9)
APC-250-A	Direct Drive Butterfly Valves (TBV-D-xxx)	NO	4.2 (1.9)
APC-850-A	Pendulum Valves (TPV-xxx)	NO	4.2 (1.9)

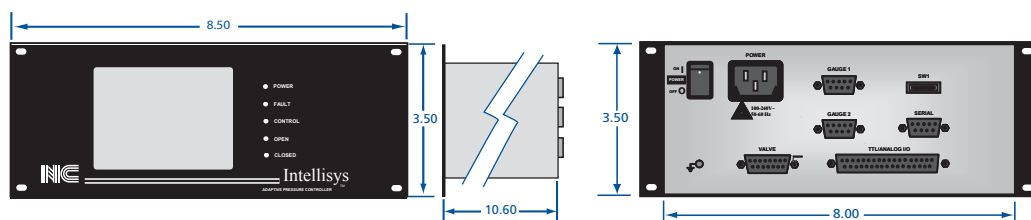

General

Construction material

Chassis: 5052-aluminum

Power input: 100-240 VAC, 50-60Hz, 100W max (60W nominal) power input.

Battery Back-up: N/A

Ambient operating conditions: 0 - 45°C @ 0-95% humidity, non-condensing

System interface

Serial communication: RS-232 or RS-485 on DB-9 female connector.

Analog / TTL communication: Six (6) analog I/O and thirteen (13) TTL I/O on DB-37 female connector

DeviceNet communication: N/A

Analog setpoint input: 0-10 or 0-5 VDC linearly proportional to pressure or valve position

Pressure output: 0-10 VDC analog output proportional to pressure, one for each vacuum gauge attached

Valve position output: 0-10 VDC or 0-5 VDC analog output proportional to valve position

Device interface

Gauge connection: Differential analog signal input with ± 15 VDC power output to one or two gauges

Valve connection: DB-15 female connector provides power and transmits position information required to operate the high performance valve

User interface

Switches: Power ON/OFF, Valve OPEN/CLOSE

Indicating LEDs: Power, Fault, Control, Valve open and closed

Graphic display: N/A
(Touch screen LCD on listed model)

Pressure control performance

Accuracy: The greater of 5 mV or 0.25% of reading

Repeatability: Within 2.5 mV or 0.12% of reading

Control range: 0.5% - 100% of the vacuum gauge range

Reliability

(99% confidence level, in clean environment)

MTBF: >50,000 hours continuous operation

Approvals

CE (EMC and Low Voltage Directives)

NRTL (United States)

SCC (Canada)

EU Directives (Europe)

All dimensions are in inches (mm) & weights are in pounds (kg), unless otherwise noted.



Measurements of Superior Accuracy and Repeatability


The **CDG025X-series Capacitance Diaphragm Gauge** line of highly accurate temperature compensated manometers is designed for stable performance in harsh manufacturing tool environments. Advanced digital electronics improve gauge performance and offer easy handling features such as one push button zero function and set point adjustment. The corrosion resistant ultra pure ceramic sensor provides excellent zero stability with a long life expectancy of several million pressure cycles, including atmospheric bursts. A robust mechanical design and digital electronics improve EMC compatibility, long term stability and temperature compensation. The **CDG025X-series** sets new standards for fast stability after power on and fast recovery from atmospheric pressure exposure.

Advantages

- Full scale ranges from 1 Torr to 1000 Torr
- Corrosion resistant ceramic sensor
- One push button zero function
- Fast stability after power on
- Temperature compensated
- Wide range power supply
- Fast recovery from atmospheric pressure
- Sensor protected from contamination
- Excellent long term signal stability

MODEL NUMBER	F.S. RANGE	TUBE FITTING	HEATED
CDG025X-T01	1 Torr	1/2" Tube End	NO
CDG025X-T01-CF	1 Torr	1.33" CF	NO
CDG025X-T01-NW1	1 Torr	NW-16	NO
CDG025X-T01-VCR	1 Torr	1/2" FVCR	NO
CDG025X-T02	2 Torr	1/2" Tube End	NO
CDG025X-T02-CF	2 Torr	1.33" CF	NO
CDG025X-T02-NW1	2 Torr	NW-16	NO
CDG025X-T02-VCR	2 Torr	1/2" FVCR	NO
CDG025X-T11	10 Torr	1/2" Tube End	NO
CDG025X-T11-CF	10 Torr	1.33" CF	NO
CDG025X-T11-NW1	10 Torr	NW-16	NO
CDG025X-T11-VCR	10 Torr	1/2" FVCR	NO
CDG025X-T12	20 Torr	1/2" Tube End	NO
CDG025X-T12-CF	20 Torr	1.33" CF	NO
CDG025X-T12-NW1	20 Torr	NW-16	NO
CDG025X-T12-VCR	20 Torr	1/2" FVCR	NO
CDG025X-T21	100 Torr	1/2" Tube End	NO
CDG025X-T21-CF	100 Torr	1.33" CF	NO
CDG025X-T21-NW1	100 Torr	NW-16	NO
CDG025X-T21-VCR	100 Torr	1/2" FVCR	NO
CDG025X-T31	1,000 Torr	1/2" Tube End	NO
CDG025X-T31-CF	1,000 Torr	1.33" CF	NO
CDG025X-T31-NW1	1,000 Torr	NW-16	NO
CDG025X-T31-VCR	1,000 Torr	1/2" FVCR	NO

	INTERNAL VOLUME in ³ (cm ³)	WEIGHT grams
1/2" Tube End	0.22 (3.6)	310
NW - 16	0.22 (3.6)	330
1.33 CF	0.22 (3.6)	350
1/2" FVCR®	0.22 (3.6)	370

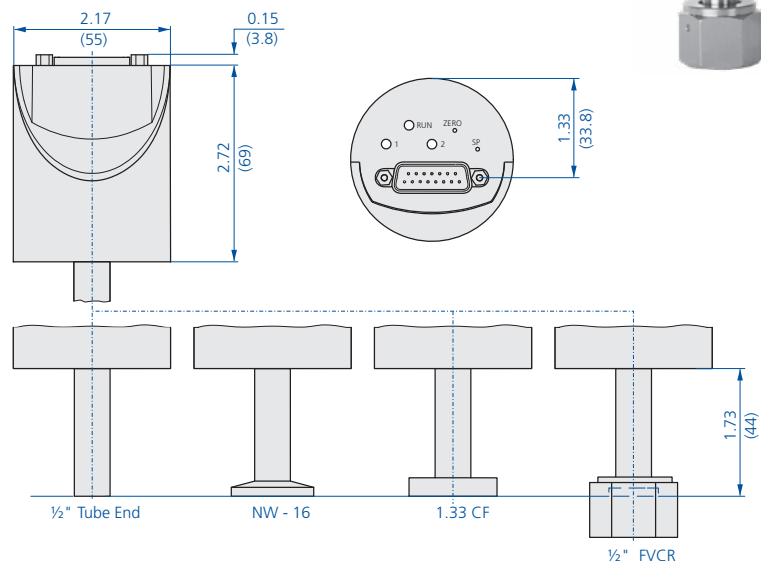

MEASUREMENT RANGE F.S. (FULL SCALE)	TORR	1000	100	20/10	2/1
Accuracy ¹⁾	% of reading	0.2	0.2	0.2	0.2
Temperature effect on zero	% F.S./°C	0.005	0.005	0.005	0.015
on span	% of reading/°C	0.01	0.01	0.01	0.01
Resolution	% F.S.	0.003	0.003	0.003	0.003
Pressure, max.	kPa (absolute)	400	260	260	260
Response Time ²⁾	ms	30	30	30	30
Lowest reading	% F.S.	0.01			
Lowest suggested reading	% F.S.	0.05			
Lowest suggested control pressure	% F.S.	0.05			
Temperature Operation (ambient)	°C	+5 to +50			
Bakeout at flange ³⁾	°C	≤110			
Storage	°C	-40 to +65			
Supply voltage	VDC	14 to +30			
Power consumption	W	≤1			
Output signal (analog)	VDC	0 to +10			
Degree of protection		IP 30			
Standards		EN 61000-6-2, EN 6100-6-3, EN 61010, UL 61010-1, CSA 22.2 No. 61010-1, RoHS			
Electrical connection		D-sub, 15 pin, male			
Materials exposed to vacuum		Aluminum oxide ceramic (A203), Vacon 70 ⁴⁾ , stainless steel (AISI 316L ⁵⁾ , AgCuTi hard solder, sealing glass			

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ Incease 10 to 90% F.S. ³⁾ Non operation

⁴⁾ 28% Ni, 23% Co, 49% Fe ⁵⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

Downstream Pressure Control

Capacitance Diaphragm Gauges

SECTION 4.6




The **CDG045-series** manometers are your best choice for high accurate total pressure measurement and control.

Advantages

- Lower cost of ownership, 50% faster warm up, energy efficient low power consumption
- Easy integration, wide variety of full scales, flanges and interfaces, standard with two set points
- Easy one push button or remote signal zero command, zero offset adjustable
- Two year warranty, longer life time with advanced heating concept and gauge protection
- No long term recalibration due to excellent signal stability and repeatability, even in harsh plasma applications
- Diagnostic port for quick service and maintenance
- Compliance and standards: CE, EN, UL, SEMI, RoHS

MODEL NUMBER	F.S. RANGE	TUBE FITTING	HEATED
CDG045-M11	100 mTorr	1/2" Tube End	45°C
CDG045-M11-CF	100 mTorr	1.33" CF	45°C
CDG045-M11-NW1	100 mTorr	NW-16	45°C
CDG045-M11-VCR	100 mTorr	1/2" FVCR	45°C
CDG045-T01	1 Torr	1/2" Tube End	45°C
CDG045-T01-CF	1 Torr	1.33" CF	45°C
CDG045-T01-NW1	1 Torr	NW-16	45°C
CDG045-T01-VCR	1 Torr	1/2" FVCR	45°C
CDG045-T02	2 Torr	1/2" Tube End	45°C
CDG045-T02-CF	2 Torr	1.33" CF	45°C
CDG045-T02-NW1	2 Torr	NW-16	45°C
CDG045-T02-VCR	2 Torr	1/2" FVCR	45°C
CDG045-T11	10 Torr	1/2" Tube End	45°C
CDG045-T11-CF	10 Torr	1.33" CF	45°C
CDG045-T11-NW1	10 Torr	NW-16	45°C
CDG045-T11-VCR	10 Torr	1/2" FVCR	45°C
CDG045-T12	20 Torr	1/2" Tube End	45°C
CDG045-T12-CF	20 Torr	1.33" CF	45°C
CDG045-T12-NW1	20 Torr	NW-16	45°C
CDG045-T12-VCR	20 Torr	1/2" FVCR	45°C
CDG045-T21	100 Torr	1/2" Tube End	45°C
CDG045-T21-CF	100 Torr	1.33" CF	45°C
CDG045-T21-NW1	100 Torr	NW-16	45°C
CDG045-T21-VCR	100 Torr	1/2" FVCR	45°C
CDG045-T31	1,000 Torr	1/2" Tube End	45°C
CDG045-T31-CF	1,000 Torr	1.33" CF	45°C
CDG045-T31-NW1	1,000 Torr	NW-16	45°C
CDG045-T31-VCR	1,000 Torr	1/2" FVCR	45°C

	INTERNAL VOLUME in ³ (cm ³)	WEIGHT grams
1/2" Tube End	0.26 (4.2)	837
NW - 16	0.26 (4.2)	852
1.33 CF	0.26 (4.2)	875
1/2" FVCR®	0.26 (4.2)	897

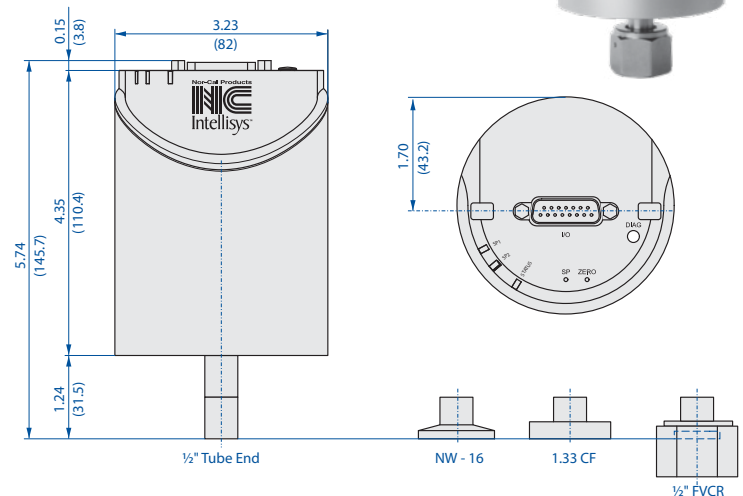

MEASUREMENT RANGE F.S. (FULL SCALE)	TORR	1000	100	20/10	2/1	0.1
Accuracy ¹⁾	% of reading			0.15		
Temperature effect on zero on span	% F.S. / °C % of reading / °C			0.0025		0.005
Pressure, max.	kPa (absolute)	400		260		130
Resolution	% F.S.			0.003		
Lowest reading	% F.S.			0.01		
Lowest suggested reading	% F.S.			0.05		
Lowest suggested control pressure	% F.S.			0.05		
Temperature Operation (ambient) Bakeout at flange Storage	°C °C °C			+10 to +40 ≤110 -40 to +65		
Supply voltage				+14 to +30 VDC or ± 15 V (±5%)		
Power consumption During Heat up At operating temperature	W W			≤12 ≤8		
Output signal (analog)	VDC			0 to +10		
Response time ²⁾	ms			30		130
Degree of protection				IP 40		
Standards				EN 61000-6-2/6-3, EN 61010, UL 61010-1, CSA 22.2 No. 61010-1, SEMI S-2		
Electrical connection				D-sub, 15 pin, male		
Set point Relay Contact Hysteresis	VDC / ADC % F.S.			two set points (SPT, SP2) ≤30 / ≤0.5 1		
Diagnostic port Protocol Reed Set				RS232-C Pressure, status, ID, set points, filter, zero adjust, factory reset, DC offset		
Materials exposed to vacuum				Aluminum oxide ceramic (A203), stainless steel (AISI 316L ³⁾), Nickel, sealing glass		

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ Incease 10 to 90% F.S.

³⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe



Downstream Pressure Control

Capacitance Diaphragm Gauges


CDG100-series gauges are temperature controlled at 100°C for superior performance in demanding semiconductor and plasma processes.

Advantages

- Lower cost of ownership, 50% faster warm up, energy efficient low power consumption
- Easy integration, wide variety of full scales, flanges and interfaces, standard with two set points
- Easy one push button or remote signal zero command, zero offset adjustable
- Two year warranty, longer life time with advanced heating concept and gauge protection
- No long term recalibration due to excellent signal stability and repeatability, even in harsh plasma applications
- Diagnostic port for quick service and maintenance
- Compliance & standards: CE, EN, UL, SEMI, RoHS

MODEL NUMBER	F.S. RANGE	TUBE FITTING	HEATED
CDG100-M11	100 mTorr	1/2" Tube End	100°C
CDG100-M11-CF	100 mTorr	1.33" CF	100°C
CDG100-M11-NW1	100 mTorr	NW-16	100°C
CDG100-M11-VCR	100 mTorr	1/2" FVCR	100°C
CDG100-T01	1 Torr	1/2" Tube End	100°C
CDG100-T01-CF	1 Torr	1.33" CF	100°C
CDG100-T01-NW1	1 Torr	NW-16	100°C
CDG100-T01-VCR	1 Torr	1/2" FVCR	100°C
CDG100-T02	2 Torr	1/2" Tube End	100°C
CDG100-T02-CF	2 Torr	1.33" CF	100°C
CDG100-T02-NW1	2 Torr	NW-16	100°C
CDG100-T02-VCR	2 Torr	1/2" FVCR	100°C
CDG100-T11	10 Torr	1/2" Tube End	100°C
CDG100-T11-CF	10 Torr	1.33" CF	100°C
CDG100-T11-NW1	10 Torr	NW-16	100°C
CDG100-T11-VCR	10 Torr	1/2" FVCR	100°C
CDG100-T12	20 Torr	1/2" Tube End	100°C
CDG100-T12-CF	20 Torr	1.33" CF	100°C
CDG100-T12-NW1	20 Torr	NW-16	100°C
CDG100-T12-VCR	20 Torr	1/2" FVCR	100°C
CDG100-T21	100 Torr	1/2" Tube End	100°C
CDG100-T21-CF	100 Torr	1.33" CF	100°C
CDG100-T21-NW1	100 Torr	NW-16	100°C
CDG100-T21-VCR	100 Torr	1/2" FVCR	100°C
CDG100-T31	1,000 Torr	1/2" Tube End	100°C
CDG100-T31-CF	1,000 Torr	1.33" CF	100°C
CDG100-T31-NW1	1,000 Torr	NW-16	100°C
CDG100-T31-VCR	1,000 Torr	1/2" FVCR	100°C

	INTERNAL VOLUME in ³ (cm ³)	WEIGHT grams
1/2" Tube End	0.26 (4.2)	837
NW - 16	0.26 (4.2)	852
1.33 CF	0.26 (4.2)	875
1/2" FVCR®	0.26 (4.2)	897

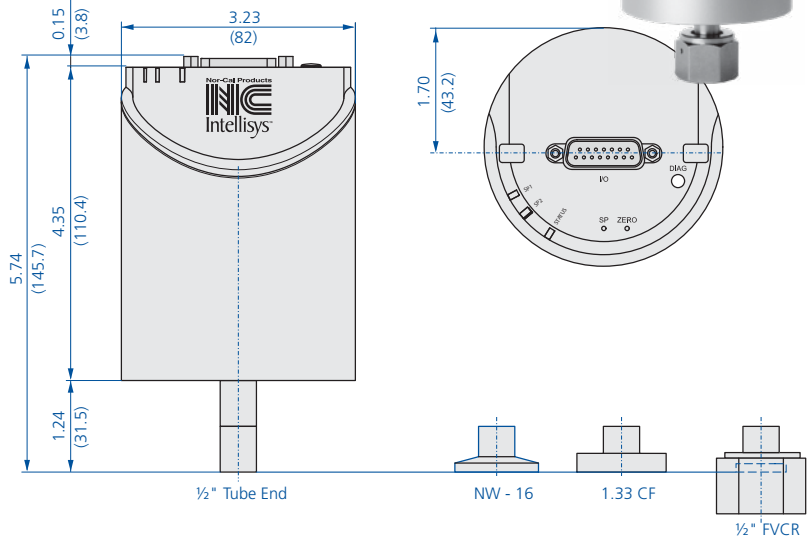

MEASUREMENT RANGE F.S. (FULL SCALE)	TORR	1000	100	20/10	2/1	0.1
Accuracy ¹⁾	% of reading	0.2				0.4
Temperature effect on zero on span	% F.S. / °C	0.00025				0.005
	% of reading / °C	0.02				
Pressure, max.	kPa (absolute)	400		260		130
Resolution	% F.S.	0.003				
Lowest reading	% F.S.	0.01				
Lowest suggested reading	% F.S.	0.05				
Lowest suggested control pressure	% F.S.	0.05				
Temperature Operation (ambient)	°C	+10 to +50				
Bakeout at flange	°C	≤110				
Storage	°C	-40 to +65				
Supply voltage		+14 to +30 VDC or ± 15 V (±5%)				
Power consumption During Heat up At operating temperature	W W	≤15 ≤10				
Output signal (analog)	VDC	0 to +10				
Response time ²⁾	ms	30				130
Degree of protection		IP 40				
Standards		EN 61000-6-2/6-3, EN 61010, UL 61010-1, CSA 22.2 No. 61010-1, SEMI S-2				
Electrical connection		D-sub, 15 pin, male				
Set point Relay Contact Hysteresis	VDC / ADC % F.S.	two set points (SPT, SP2) ≤30 / ≤0.5 1				
Diagnostic port Protocol Read Set		RS232-C Pressure, status, ID, set points, filter, zero adjust, factory reset, DC offset				
Materials exposed to vacuum		Aluminum oxide ceramic (A203), stainless steel (AISI 316L ³⁾ , Nickel, sealing glass				

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ Incease 10 to 90% F.S.

³⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

Downstream Pressure Control

Capacitance Diaphragm Gauges

SECTION 4.6




CDG160-series gauges are temperature controlled at 160°C for superior signal stability and repeatability.

Advantages

- Lower cost of ownership, 50% faster warm up, energy efficient low power consumption
- Easy integration, wide variety of full scales, flanges and interfaces, standard with two set points
- Easy one push button or remote signal zero
- command, zero offset adjustable
- Two year warranty, longer life time with advanced heating concept and gauge protection
- No long term recalibration due to excellent signal stability and repeatability, even in harsh plasma applications
- Diagnostic port for quick service and maintenance
- Compliance & standards: CE, EN, UL, SEMI, RoHS

MODEL NUMBER	F.S. RANGE	TUBE FITTING	HEATED
CDG160-T01	1 Torr	1/2" Tube End	160°C
CDG160-T01-CF	1 Torr	1.33" CF	160°C
CDG160-T01-NW1	1 Torr	NW-16	160°C
CDG160-T01-VCR	1 Torr	1/2" FVCR	160°C
CDG160-T02	2 Torr	1/2" Tube End	160°C
CDG160-T02-CF	2 Torr	1.33" CF	160°C
CDG160-T02-NW1	2 Torr	NW-16	160°C
CDG160-T02-VCR	2 Torr	1/2" FVCR	160°C
CDG160-T11	10 Torr	1/2" Tube End	160°C
CDG160-T11-CF	10 Torr	1.33" CF	160°C
CDG160-T11-NW1	10 Torr	NW-16	160°C
CDG160-T11-VCR	10 Torr	1/2" FVCR	160°C
CDG160-T12	20 Torr	1/2" Tube End	160°C
CDG160-T12-CF	20 Torr	1.33" CF	160°C
CDG160-T12-NW1	20 Torr	NW-16	160°C
CDG160-T12-VCR	20 Torr	1/2" FVCR	160°C
CDG160-T21	100 Torr	1/2" Tube End	160°C
CDG160-T21-CF	100 Torr	1.33" CF	160°C
CDG160-T21-NW1	100 Torr	NW-16	160°C
CDG160-T21-VCR	100 Torr	1/2" FVCR	160°C
CDG160-T31	1,000 Torr	1/2" Tube End	160°C
CDG160-T31-CF	1,000 Torr	1.33" CF	160°C
CDG160-T31-NW1	1,000 Torr	NW-16	160°C
CDG160-T31-VCR	1,000 Torr	1/2" FVCR	160°C

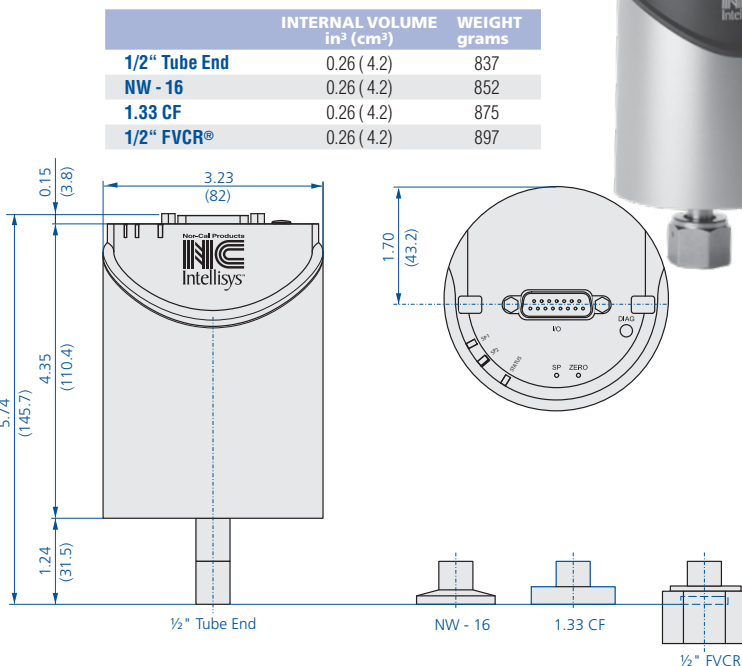

MEASUREMENT RANGE F.S. (FULL SCALE)	TORR	1000	100	20/10	2/1
Accuracy ¹⁾	% of reading				0.4
Temperature effect on zero on span	% F.S./°C % of reading/°C				0.005 0.02
Pressure, max.	kPa (absolute)	400			260
Resolution	% F.S.				0.003
Lowest reading	% F.S.				0.01
Lowest suggested reading	% F.S.				0.05
Lowest suggested control pressure	% F.S.				0.05
Temperature Operation (ambient) Bakeout at flange Storage	°C °C °C				+10 to +50 ≤110 -40 to +65
Supply voltage					+14 to +30 VDC or ± 15 V (±5%)
Power consumption during heat up	W				≤18
Power consumption at operating temperatures	W				≤18
Output signal (analog)	VDC				0 to +10
Response time ²⁾	ms				30
Degree of protection					IP 40
Standards		EN 61000-6-2/6-3, EN 61010, UL 61010-1, CSA 22.2 No. 61010-1, SEMI S-2			
Electrical connection		D-sub, 15 pin, male			
Set point Relay Contact Hysteresis	VDC / ADC % F.S.				two set points (SPT, SP2) ≤30 / ≤0.5 1
Diagnostic port Protocol Reed Set					RS232-C Pressure, status, ID, set points, filter, zero adjust, factory reset, DC offset
Materials exposed to vacuum					Aluminum oxide ceramic (A203), stainless steel (AISI 316L ³⁾), Nickel, sealing glass

¹⁾ Non-linearity, hysteresis, repeatability at 25°C ambient operating temperature without temperature effects after 2 hours operation.

²⁾ Incease 10 to 90% F.S.

³⁾ 18% Cr, 10% Ni, 3% Mo, 69% Fe

Downstream Pressure Control

Accessories and Spare Parts




Power Supply APC-PSM-DB15

For use with all buried box DC powered APCs as well as IQ-series valves. 24 VDC, 2.5A power supply (100-240 VAC input). Includes CRD-PWR-US1 power cord and 6' (2m) DC supply cable with DB15 D-sub connector.



APC &
IQ Valve
Power Supply



AC Power Cord Plug
Configurations



Oldham
Coupling Hubs

To make the completion of an Intellisys downstream pressure control system easy, Nor-Cal Products offers a comprehensive selection of cables and related accessories. These include signal and communications cables, power cords, power supplies as well as spare parts.

Cable Nomenclature Clarification

Most cable and cord part numbers listed below end with the number 10 as a suffix, which represents the cable length, measured in feet. Thus, our standard cable length is 10' (3m). However, any length between 1' (0.3m) and 30' (9.1m) can be supplied as a special request. Please contact Nor-Cal Products for price and availability information.

Cables and Power Cords

MODEL NUMBER	CABLE OR CORD TYPE	DESCRIPTION
TBV-CRD-10	Controller-to-Valve	Cable needed to connect any Intellisys throttle valve to any buried box controller. This cable is NOT needed for IQ-series valves.
CDG-CRD-10	Controller-to-Gauge	A/C powered APC-to-Gauge cable, where the gauge has screw terminals
CDG-CRD-DB9-10	Controller-to-Gauge	A/C powered APC-to-Gauge cable, where the gauge has a 9-pin D-sub connector
CDG-CRD-DB15-10	IQ Controller-to-Gauge	A/C powered APC-to-Gauge cable, where the gauge has a 15-pin D-sub connector. This is the correct cable to use for all Nor-Cal gauges.
CDG-IQ-CRD-10	IQ Controller-to-Gauge	DC powered (including all IQ and IQ+ models) APC-to-Gauge cable, where the gauge has screw terminals
CDG-IQ-CRD-DB9-10	IQ Controller-to-Gauge	DC powered (including all IQ and IQ+ models) APC-to-Gauge cable, where the gauge has a 9-pin D-sub connector
CDG-IQ-CRD-DB15-10	IQ Controller-to-Gauge	DC powered (including all IQ and IQ+ models) APC-to-Gauge cable, where the gauge has a 15-pin D-sub connector. This is the correct cable to use for all Nor-Cal gauges.
CDG-IQ-CRD-Y	IQ Controller-to-Gauge	A 1' (0.3m) long Y-cable to be used if two gauges are interfaced with a DC powered APC (including IQ). Use of this Y-cable also requires two extension cables. Use either CDG-CRD-10, CDG-CRD-DB9-10 or CDG-CRD-DB15-10.
APC-CRD-RS232-10	Serial Communication	Use to connect any AC powered APC to a standard PC or laptop DB-9 serial port.
IQ-CRD-RS232-10	Serial Communication	Same as above, but for use with DC powered APC models, including IQ.
RD-PWR-US1	AC Power Cord	7' (2m), 10A-125V rating. US standard power plug. See diagram 1.
CRD-PWR-US2	AC Power Cord	7' (2m), 10A-250V rating. US high voltage power plug. See diagram 2.
CRD-PWR-UK	AC Power Cord	7' (2m), 10A-250V rating. United Kingdom grounded power plug. See diagram 3.
CRD-PWR-EU	AC Power Cord	7' (2m), 10A-250V rating. Continental Europe grounded power plug. diagram 4.

APC Spare Parts

APC controllers do not contain any user serviceable parts except for replacement battery packs. All other service work needs to be performed by authorized Nor-Cal personnel. Please contact us for details.

MODEL NUMBER	SPARE PART	DESCRIPTION
APC-BAT-1518	Replacement battery pack	15-cell, 18-volt replacement battery pack
IQP-BAT-1518	IQ+ Replacement battery pack	15-cell, 18-volt replacement battery pack

TBV Spare Parts

PART NUMBER	SPARE PART	DESCRIPTION
54-310-004	Oldham Coupling Disk	Acetal. For all valves up to and including 4" (ISO-100)
54-330-006	Oldham Coupling Disk	Acetal. For 6 inch (ISO-160) valve and some UVD assemblies.
54-330-016	Oldham Coupling Disk	Acetal. For 8 inch (ISO-200) valve and some UVD assemblies
54-330-017	Oldham Coupling Disk	PEEK. For all valves up to and including 4" (ISO-100)
54-330-018	Oldham Coupling Disk	PEEK. For 6 inch (ISO-160) valve and some UVD assemblies.
54-330-019	Oldham Coupling Disk	PEEK. For 8 inch (ISO-200) valve and some UVD assemblies
TBV-400-90	FKM O-ring kit.	Set of four. For all TBV sizes up to and including 4" (ISO-100)
TBV-600-90	FKM O-ring kit.	Set of four. For 6 inch (ISO-160) TBV
TBV-800-90	FKM O-ring kit.	Set of four. For 8 inch (ISO-200) TBV and 10" (ISO-250) TBV

TPV Spare Parts

Please contact Nor-Cal Products technical support department for details.

CDG Spare Parts

CDG gauges do not contain any user serviceable parts. All service work needs to be performed by authorized Nor-Cal Products personnel. Please contact us for details.

Order Information

Regional Sales Contacts

Nor-Cal Products



by PFEIFFER VACUUM

Manufacturing & Corporate Global Headquarters

1967 South Oregon Street, Yreka, CA 96097

Phone: 530-842-4457 | Toll Free: 800-824-4166 | Fax: 530-842-9189

Silicon Valley Sales & Applications Office

3375 Scott Blvd., Suite 100, Santa Clara, CA 95054

Phone: 408-980-8992 | Fax: 408-980-8947 | E-mail: ncsales@n-c.com

DIRECT SALES:

www.n-c.com | 1-800-824-4166 | ncsales@n-c.com

Locate your
sales representative
at
www.n-c.com/sales
or call
800-824-4166
for assistance

Send drawings
and quote
requests to
ncsales@n-c.com

Follow us on
LinkedIn

Sylvie Bouhier

*European
Regional Sales Manager*

Ph: +44 (0)799 057 1405

sbouhier@nor-cal.eu

Nor-Cal Products, Europe

Suite D, Dittons Engineering Park
Dittons Road, Polegate BN26 6HY
United Kingdom

Ph: +44 (0)1323 810 854

www.nor-cal.eu

Lena Tan

*Asia-Pacific
Regional Sales Manager*

Ph: +65 6634-1228

sales@n-c.asia

Nor-Cal Products, Asia Pacific

2 Ang Mo Kio Street 64 #01-03A
ECON Industrial Building
Singapore 569084

MAILING ADDRESS:

Nor-Cal Products, Asia Pacific

Serangoon Garden
P. O. Box 428
Singapore 915531

IT Jang

*South Korea
Regional Sales Manager*

Ph: +82-10-7554-0117


itjang@n-c.com

Nor-Cal Products, South Korea

Gadong 2nd Floor, 531-8 Gajang-ro,
Osan-si, Gyeonggi-do,
South Korea, 18103
Republic of Korea

Ph: +82-31-8003-1341

Fax: +82-31-8003-1342

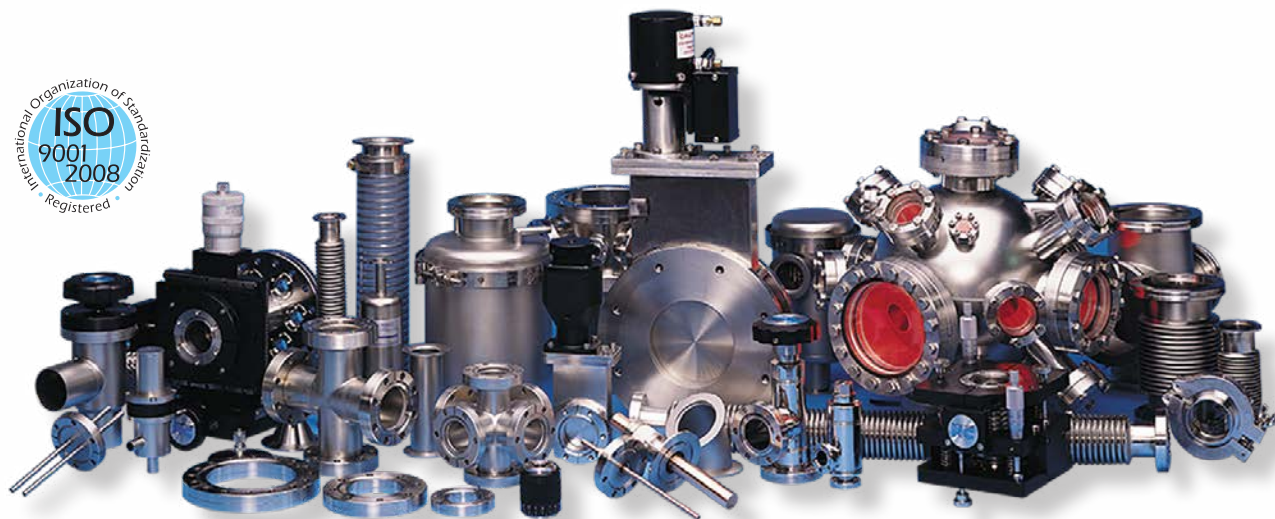

Terms & Conditions of Sale

Payment terms are net 30 days from the date of the invoice once credit has been approved. Otherwise, C.O.D. Most major credit cards are accepted.

If payment in full is not received within 30 days, a 1.5% per month late charge may be added to the unpaid balance. Discounts may be revoked if an account is not paid within these terms.

MINIMUM ORDERS: The minimum domestic order is \$40. The minimum international order is \$100.00.

QUANTITY PRICING:

Quantity pricing is valid on single shipments only.

AVAILABILITY: Our inventory is updated automatically, but there is always a possibility that an item may be unavailable or sold-out. If this occurs, customers are notified as soon as possible and alternative options are offered if available.

PACKAGING: The factory will determine the most cost effective method to package items for shipment. A \$5.00 USD per cardboard box charge will be applied to all orders with a maximum charge of \$25.00 USD per shipment. Large products requiring a wooden crate will be charged an amount consistent with the fabrication of the necessary crate.

FOB POINT: All orders ship FOB Yreka from 1967 S. Oregon, Yreka, California, 96097, USA unless quoted otherwise.

LOST OR DAMAGED ITEMS: Nor-Cal does not assume responsibility for items lost or damaged in transit, or for any direct or indirect damages incurred. Shipping damages are to be handled by the customer. Nor-Cal will provide the tracking number and contact information for the shipping company as needed. All items are purchased at the customer's risk.

EXPORTED COMMODITIES: US Export administration Regulations must be followed. Diversion contrary to US Law is prohibited.

Pricing & Dimensions

In order to meet the changing needs of our customers we periodically make design revisions in our standard product line. As a result, the dimensions, pricing and specifications are subject to change without notice. International pricing may also vary.

SPECIAL TOOLING: Products ordered to non-standard specifications should state specification requirements in detail. Fee for special tooling may apply. On request, test report(s) and/or certification(s) can be supplied at additional cost.

Discounts

OEM and quantity discounts are available to qualified customers.

Return Policy

An RMA (Return Materials Authorization) number must be obtained from Nor-Cal Products before returning any merchandise. The RMA form can be found under SUPPORT in the footer of pages at www.n-c.com. To expedite the assignment of an RMA number, complete the form online and submit online. You may also print and email the completed form to rma@n-c.com or fax to the attention of the RMA Coordinator at 866-640-9012.

- Nor-Cal Products reserves the right to refuse the return of non-stocked items. A twenty-five (25) percent restocking fee may be charged.
- Nor-Cal Products shall incur no liability for damage, shortages or other cause alleged to have occurred at, or prior to, delivery to the carrier unless buyer shall have entered full details thereof on its receipt to the carrier. Products over 60 days old from the date of shipment will not be accepted for return.
- Nor-Cal Products must be allowed time to investigate all returns.

Cancellations & Rescheduling

Any request by customers to reschedule or cancel in total or part of any purchase order must be approved at the sole discretion of Nor-Cal Products and shall be subject to the following conditions. Nor-Cal must receive written notice of Request for Cancellation or Reschedule, stating the reasons therefore.

Customer shall be liable for payment of the following charges to Nor-Cal in the event of Cancellation or Reschedule.

- For all charges incurred (including overhead, G&A, and profit) prior to the date that notice of cancellation is received by Nor-Cal for all parts peculiar to customer's requirements. Upon payment by the customer of these charges, such parts become the property of customer, Nor-Cal will store said parts for a reasonable period of time pending the receipt of customer's instructions for disposition. Such storage is at customer's risk and may be subject to storage charges if stored by Nor-Cal for longer than 30 days from the cancellation date; plus
- Charges to convert modified standard parts for return to Nor-Cal's inventory; plus
- A restocking charge of twenty (25) percent of the purchase price of the cancelled item.

Warranty Products manufactured by Nor-Cal Products are warranted against defects in material and workmanship for a period of twelve (12) months from the date of shipment from Nor-Cal Products to the buyer. Any modification to the product by the buyer or their agent voids this warranty. Liability under this warranty is expressly limited to the replacement or repair (at Nor-Cal Products' option) of defective parts. Nor-Cal Products may at any time discharge its warranty as to any of its products by refunding the purchase price and taking back the products. This warranty applies only to parts manufactured and labor provided by Nor-Cal Products under valid warranty claims received by Nor-Cal Products within the applicable warranty period and shall be subject to the terms and conditions hereof.

- Expendable items such as tubes, heaters, sources, bellows, etc., by their nature, may not function for one year; if such items fail to give reasonable service for a reasonable period of time, as determined solely by Nor-Cal Products, they will be repaired or replaced by Nor-Cal Products at its election.
- All warranty replacement or repair of parts shall be limited to equipment malfunctions which, in the sole opinion of Nor-Cal Products, are due or traceable to defects in original materials or workmanship. Malfunctions caused by abuse or neglect of the equipment are expressly not covered by this warranty. Nor-Cal Products expressly disclaims responsibility for any loss or damage caused by the use of its products other than in accordance with proper operating and safety procedures. Reasonable care must be taken by the user to avoid hazards.
- The buyer shall give Nor-Cal Products prompt notice of any claim under this warranty. If Nor-Cal Products, in its sole discretion, determines that the product does not conform to this warranty, Nor-Cal Products shall replace or repair the product free of charge. If such replacement or repair is not feasible, Nor-Cal Products may, at its sole option, refund the purchase price.
- In-warranty repaired or replacement parts are warranted only for the remaining unexpired portion of the original warranty period applicable to the parts which have been repaired or replaced.
- After the expiration of the applicable warranty period, the buyer shall be charged at Nor-Cal Products' then current prices for parts and labor plus transportation.
- Except as stated herein, Nor-Cal Products makes no warranty, expressed or implied (either in fact or operation of law), statutory or otherwise: and, except as stated herein, Nor-Cal Products shall have no liability for special or consequential damages of any kind or from any cause arising out of the sale, installation, or use of any of its products. Statements made by any person, including representatives of Nor-Cal Products, which are inconsistent or in conflict with the terms of this warranty shall not be binding upon Nor-Cal unless reduced to writing and approved by an officer of Nor-Cal Products.
- This warranty shall not extend to any product, that in Nor-Cal Products' judgment, has been affected by damage or wear resulting from operations performed after the sale, or misuse, abrasion, negligence, accident, tampering, faulty installation, inadequate maintenance, damage or casualty.

DISCLAIMER OF WARRANTY: NOR-CAL MAKES NO WARRANTIES WITH RESPECT TO THIS SALE, WHETHER EXPRESSED OR IMPLIED, EXCEPT AS STATED HEREIN, NOR-CAL PRODUCTS MAKES NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

LIMITATION OF REMEDY AND DAMAGES: THE EXCLUSIVE REMEDY OF THE BUYER WITH RESPECT TO THE TRANSACTIONS CONTEMPLATED HEREIN SHALL BE THE REPLACEMENT OR REPAIR OF SAID PRODUCTS, OR THE RETURN OF THE PURCHASE PRICE, AS SET FORTH UNDER "WARRANTY".

EXCEPT AS HEREIN PROVIDED, EVERY FORM OF LIABILITY FOR DIRECT OR CONSEQUENTIAL DAMAGE FOR LOSS, ARISING FROM CONTRACT, TORT OR OTHERWISE, IS EXPRESSLY EXCLUDED AND DENIED, INCLUDING WITHOUT LIMITATION, LOSS OR DAMAGES TO BUILDINGS, CONTENTS, PRODUCTS OR PERSONS.

Order Information

Patents & Trademarks

Nor-Cal Products, Inc. patents and trademarks:

Genesis Modular Valves are manufactured under patent number 6289932

Intellisys Pressure Control Products are manufactured under patent number 6612331

Genesis is a trademark of Nor-Cal Products, Inc.

Intellisys is a registered trademark of Nor-Cal Products, Inc.

Other registered patents and trademarks:

Magnetic Linear/Rotary Feedthroughs are manufactured under patent number 5514925

Sample Transfer Systems are manufactured under patent number 5705128

Alumel is a registered trademark of Concept Alloys, Inc.

Cajon is a registered trademark of Swagelok Company

Chemraz is a registered trademark of Greene Tweed Company

Chromel is a registered trademark of Concept Alloys, Inc.

ConFlat is a registered trademark of Varian Associates Corp.

DeviceNet is a trademark of the Open DeviceNet Vendor Association (ODVA)

Dupra is a registered trademark of Daikin Industries, Ltd.

Ethernet is a trademark of Xerox Corporation

EVAC-CeFix is a registered trademark of EVAC AG

Inconel is a registered trademark of Special Metals Corp.

KF is a registered trademark of Leybold Vacuum Products Inc.

Kalrez is a registered trademark of DuPont Dow Elastomers

Kovar is a registered trademark of CRS Holdings Inc.

Macor is a registered trademark of Corning, Inc.

Microdot is a registered trademark of Tyco Electronics Corp.

Modbus is a registered trademark of Schneider Electric USA Inc.

Omicron is a registered trademark of Omicron Electric GmbH

Pendurroll is a patented technology of V-Tex Corporation

Perlast is a registered trademark of Precision Polymer Engineering LTD.




SolidWorks is a registered trademark of Dassault Systèmes SolidWorks Corp.

Swagelok is a registered trademark of Swagelok Company

UL is a registered trademark of Underwriters Laboratories, Inc.

VCR is a registered trademark of Swagelok Company

Windows is a registered trademark of Microsoft Corporation



Nor-Cal Products



by PFEIFFER VACUUM

Nor-Cal Products, Inc.
1967 South Oregon Street
Yreka, California 96097
800-824-4166 or 530-842-4457
Fax: 530-841-9189
www.n-c.com