


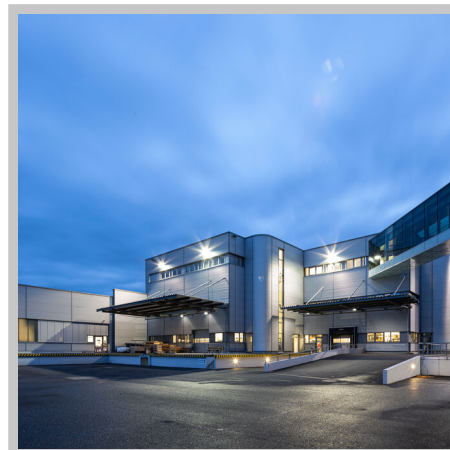

**DuoVane 12, 1-phase
motor, 100–115 V / 200–
230 V, 50 Hz | 100–115 V
/ 200–230 V, 60 Hz,
Bimetal**

PFEIFFER 

DuoVane 12

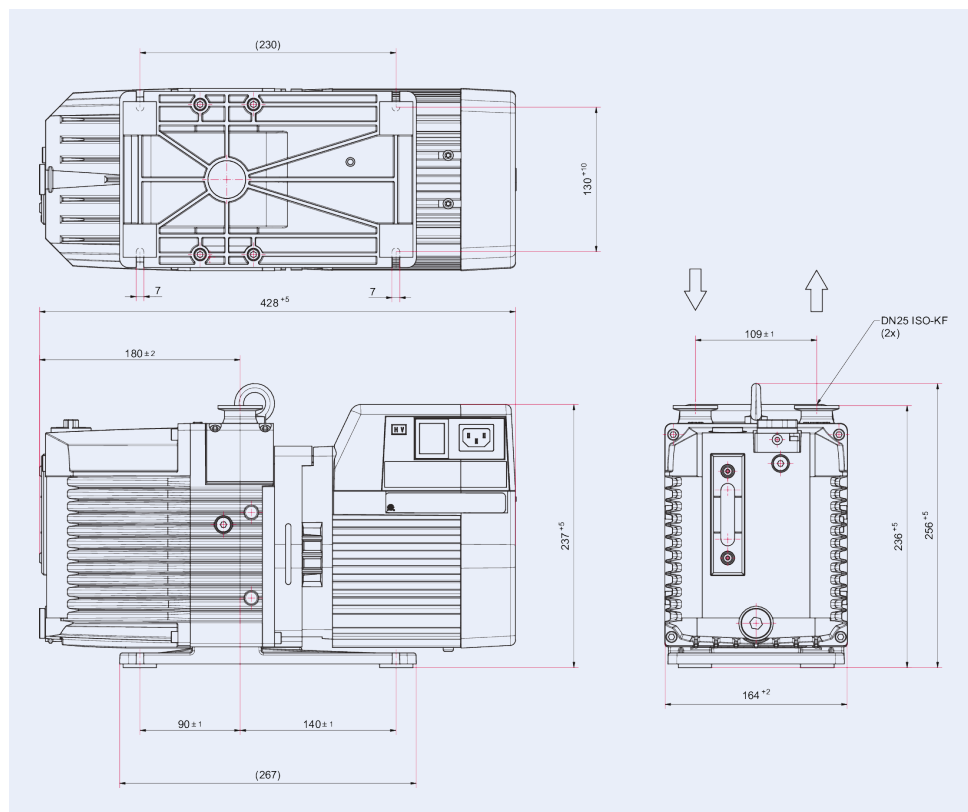


Illustration only

DuoVane 12, 1-phase motor, 100-115 V / 200-230 V, 50 Hz | 100-115 V / 200-230 V, 60 Hz, Bimetal

- Dual-stage, high-performance rotary vane pump with a pumping speed up to 12 m³/h
- With 1-phase motor
- With temperature sensor (Bimetal) for optimum motor protection
- Integrated gas ballast and HV safety valve
- For all low and medium vacuum applications
- Special feature: Various motor voltages for worldwide employment

Dimensions



Technical Data	DuoVane 12, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal
Gas ballast	Yes
Operating fluid	P3
Cooling method	Air (Forced convection)
Motor type	1-phase motor
Vacuum range min	$1 \cdot 10^{-2}$ hPa
Vacuum range max	$3 \cdot 10^{-3}$ hPa
Ambient temperature	12 – 40 °C
Certification	CE
Input voltage(s)	100 – 115 / 200 – 230 V AC, 50 Hz 100 – 115 / 200 – 230 V AC ($\pm 10\%$), 60 Hz
Ultimate pressure with gas ballast	$1 \cdot 10^{-2}$ hPa $7.5 \cdot 10^{-3}$ Torr $1 \cdot 10^{-2}$ mbar
Leakage rate safety valve	$1 \cdot 10^{-5}$ Pa m ³ /s $7.5 \cdot 10^{-5}$ Torr l/s $1 \cdot 10^{-4}$ mbar l/s
Continuous gas input temperature, max.	40 °C 104 °F 313.2 K
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Operating altitude, max.	2,000 m
Continuous inlet pressure, max.	50 hPa 37.5 Torr 50 mbar
Rotation speed at 60 Hz	1,800 rpm 1,800 min ⁻¹
Rotation speed at 50 Hz	1,500 rpm 1,500 min ⁻¹
Weight approx.	27.5 kg 60.63 lb
Pumping speed at 60 Hz	11.8 m ³ /h 6.95 cfm 196.67 l/min
Pumping speed at 50 Hz	9.5 m ³ /h 5.5917 cfm 158.3365 l/min
Switch	Yes
Motor protection	Thermal winding protection
Mains cable	No, C14-plug inside the terminal box
Rated power 50 Hz	0.45 kW
Rated power 60 Hz	0.55 kW
Dimensions (L x W x H)	433 x 166 x 239 mm
Number of pumping stages	Two stage
Operating fluid amount	1.2 l
Exhaust pressure, min.	Atmospheric pressure
Connection flange (in)	DN 25 ISO-KF
Connection flange (out)	DN 25 ISO-KF

Order number	DuoVane 12, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal
DuoVane 12, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal	PK D920 020C0

Accessories	DuoVane 12, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal
Seal kit for DuoVane 20	PK E30 200 -T
Maintenance kit 1 for DuoVane 5 - 20	PK E31 200 -T
Maintenance kit 2 for DuoVane 10	PK E31 212 -T
Maintenance kit 3 for DuoVane 10	PK E32 202 -T
Valves and springs for DuoVane 10	PK E34 202 -T
Diaphragm HV valve for DuoVane 5 - 20	PK E34 210 -T
Rotary shaft seal for DuoVane 5 - 20	PK E36 200 -T
Gate valve DuoVane 10	PK E38 202 -T
Operating fluid P3 for DuoVane 5 - 20	PK E39 200 -T
Gas ballast valve for DuoVane 5 - 20	PK E39 205 -T
Sight glass for DuoVane 5 - 20	PK E39 206 -T



Errors and/or changes excepted. - 4/10/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 