


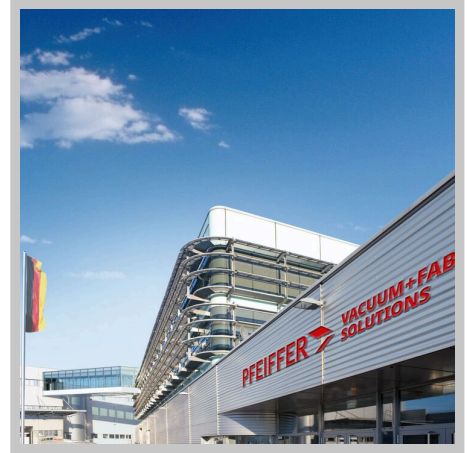

**DuoVane 6, 3-phase
motor, 200–
220/240/380–415 V,
50 Hz | 200–
220/280/380–480 V,
60 Hz, 60 Hz, Bimetal**

PFEIFFER 

DuoVane 6

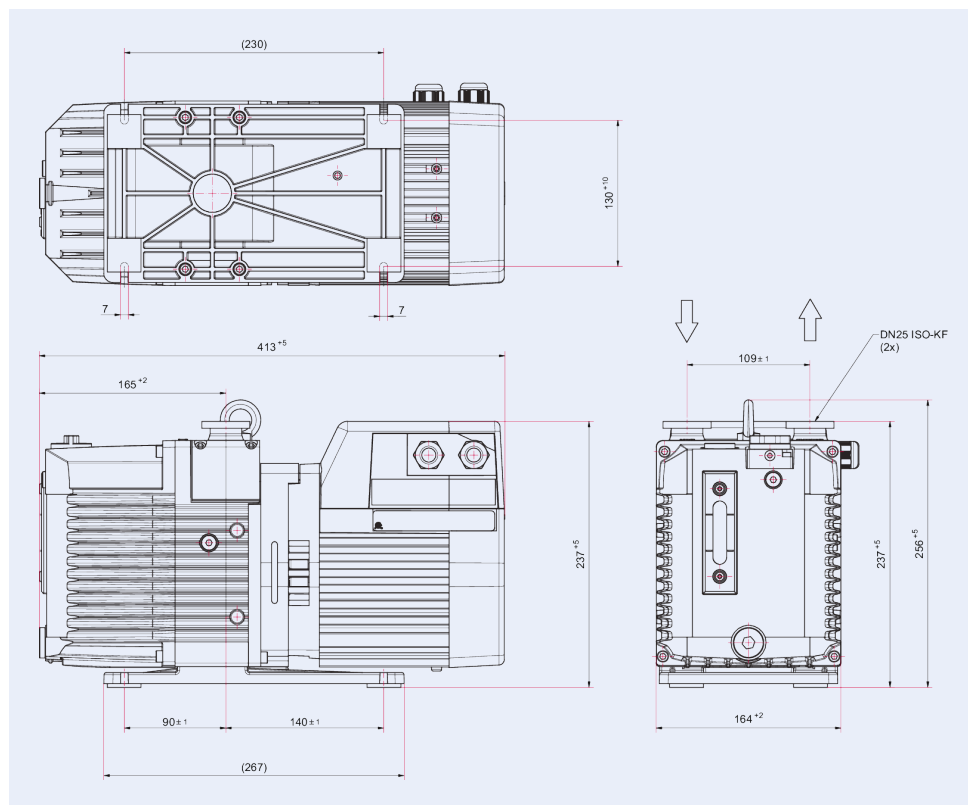


Illustration only

DuoVane 6, 3-phase motor, 200-220/240/380-415 V, 50 Hz | 200-220/280/380-480 V, 60 Hz, 60 Hz, Bimetal

- Dual-stage, high-performance rotary vane pump with a pumping speed up to 7 m³/h
- With 3-phase motor
- With temperature sensor (Bimetal) for optimum motor protection
- Integrated gas ballast and HV safety valve
- For all low and medium vacuum applications
- Special feature: Various motor voltages for worldwide employment

Dimensions



Technical Data	DuoVane 6, 3-phase motor, 200–220/240/380–415 V, 50 Hz 200-220/280/380-480 V, 60 Hz, 60 Hz, Bimetal
Gas ballast	Yes
Operating fluid	P3
Cooling method	Air (Forced convection)
Motor type	3-phase motor
Vacuum range min	$1 \cdot 10^{-2}$ hPa
Vacuum range max	$3 \cdot 10^{-3}$ hPa
Ambient temperature	12 – 40 °C
Certification	CE
Input voltage(s)	200 – 220 / 240 / 380 – 415 V AC, 50 Hz 200 – 220 / 280 / 380 – 480 V AC (±5 %), 60 Hz
Ultimate pressure with gas ballast	$1 \cdot 10^{-2}$ hPa $7.5 \cdot 10^{-3}$ Torr $1 \cdot 10^{-2}$ mbar
Leakage rate safety valve	$1 \cdot 10^{-5}$ Pa m ³ /s $7.5 \cdot 10^{-5}$ Torr l/s $1 \cdot 10^{-4}$ mbar l/s
Continuous gas input temperature, max.	40 °C 104 °F 313.2 K
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Operating altitude, max.	2,000 m
Continuous inlet pressure, max.	50 hPa 37.5 Torr 50 mbar
Rotation speed at 60 Hz	1,800 rpm 1,800 min ⁻¹
Rotation speed at 50 Hz	1,500 rpm 1,500 min ⁻¹
Weight approx.	25 kg 55.12 lb
Pumping speed at 60 Hz	6.5 m ³ /h 3.83 cfm 108.34 l/min
Pumping speed at 50 Hz	5.5 m ³ /h 3.2373 cfm 91.6685 l/min
Switch	No
Motor protection	Bimetal
Mains cable	No
Rated power 50 Hz	0.55 kW
Rated power 60 Hz	0.66 kW
Dimensions (L x W x H)	418 x 166 x 239 mm
Number of pumping stages	Two stage
Operating fluid amount	1.1 l
Exhaust pressure, min.	Atmospheric pressure
Connection flange (in)	DN 25 ISO-KF
Connection flange (out)	DN 25 ISO-KF

Order number	DuoVane 6, 3-phase motor, 200–220/240/380–415 V, 50 Hz 200-220/280/380-480 V, 60 Hz, 60 Hz, Bimetal
DuoVane 6, 3-phase motor, 200–220/240/380–415 V, 50 Hz 200-220/280/380-480 V, 60 Hz, 60 Hz, Bimetal	PK D910 020 14

Accessories	DuoVane 6, 3-phase motor, 200-220/240/380-415 V, 50 Hz 200-220/280/380-480 V, 60 Hz, Bimetal
Seal kit for DuoVane 5	PK E30 203 -T
Maintenance kit 1 for DuoVane 5 - 20	PK E31 200 -T
Maintenance kit 2 for DuoVane 5	PK E31 213 -T
Maintenance kit 3 for DuoVane 5	PK E32 203 -T
Valves and springs for DuoVane 5	PK E34 203 -T
Diaphragm HV valve for DuoVane 5 - 20	PK E34 210 -T
Rotary shaft seal for DuoVane 5 - 20	PK E36 200 -T
Gate valve DuoVane 5	PK E38 203 -T
Operating fluid P3 for DuoVane 5 - 20	PK E39 200 -T
Gas ballast valve for DuoVane 5 - 20	PK E39 205 -T
Sight glass for DuoVane 5 - 20	PK E39 206 -T



Errors and/or changes excepted. - 4/10/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 