



Pressure &

Vacuum Measurement Solutions

WWW.MKSINST.COM

430E

BARATRON® ABSOLUTE INDUSTRIAL PRESSURE TRANSMITTER

MKS Instruments, the recognized leader in capacitance manometer technology, now offers the 430E Baratron® absolute pressure transmitter for use in industrial pressure and vacuum measurement applications where explosion-proof ratings are required for safe operation. The 430E uses a new dual-electrode sensor that offers significant improvements in temperature compensation and operation at higher temperatures. The net result is a very accurate and repeatable pressure/vacuum sensor that is suitable for many industrial and petrochemical processes.

Like all MKS Baratron capacitance manometers, the 430E measures the system's total pressure directly – completely independent of the specific gas composition. The sensor measures the change in capacitance between its Inconel® diaphragm and the adjacent dual electrode disk. When the pressure or vacuum in the process chamber changes, the diaphragm deflects from its previous position, which causes a change in capacitance between the diaphragm and the electrode. That change is detected by sophisticated analog electronics, and then amplified to produce a linear output signal. This also permits MKS to specify the overall device accuracy as a percent of Reading rather than most competitive products' percent of Full Scale range – which can be up to 15x more accurate at the lower end of the measurement range of the product.


Features & Benefits

- NEMA 4 housing approved for explosion-proof applications
- Ambient operating temperature up to 50°C (125°F)
- Dual electrode design improves stability
- Full Scale pressure ranges from 1 Torr to 25,000 Torr
- Measures total pressure directly, independent of gas composition
- Percent of Reading accuracy gives a broad dynamic range and up to 15x improvement in uncertainty band compared with percent of Full Scale
- All-Inconel corrosion-resistant sensor construction
- Two-wire, 4-20 mA signal output




Specifications and Ordering Information

Side View



Front View

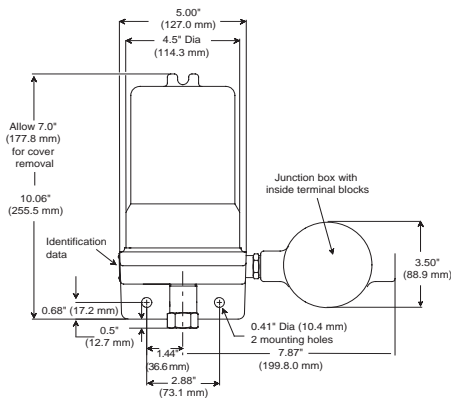

Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).

Full Scale Pressure Ranges

1, 2, 10, 100, and 1000 Torr (mmHg); 100, 200, 300, 400, and 500 psia

Accuracy (includes non-linearity, hysteresis, and non-repeatability)

± 0.50% of Reading

Temperature Coefficients

Zero

0.020% Full Scale/°C

Span

0.040% Reading/°C

Operating Temperature Range

0° to 50°C (32° to 125°F)

Materials Exposed to Process Gases

Inconel, Type 316L stainless steel, and Type 304 stainless steel

Volume (Px side)

7.0 cm³

Overpressure Limit

120% of FS, or 35 psia (240 kPa) – whichever is greater

Power Required/Output Signal

+24 to 32VDC into 500Ω load; two-wire 4-20 mA out. Output signal is 4.0 mA at 0 Torr and 20.0 mA at FS range

Fitting

1/4" x 18 NPT

Compliance

NEMA 4, FM17US0326

Zero Adjustment

Continuously adjustable externally

Time Response

With snubber: 250 msec. Without snubber: 20 msec. (FM Approval voided without snubber)

Mounting Position

Panel mount or pipe mount with U-bolt, process connection down

Housing Materials

356-T6 aluminum (NEMA 4); 2-part polyurethane paint

Electrical Connection

1/2" conduit with screw terminals

Weight

6 lbs (3 kg)

Ordering Code Example: 430EA00010

| Type 430E | Code | Configuration |
|----------------------------|-------|---------------|
| Type Number | 430E | 430E |
| Pressure Reference | A | A |
| Pressure Range, Full Scale | | |
| 1 Torr | 00001 | 00010 |
| 2 Torr | 00002 | |
| 10 Torr | 00010 | |
| 100 Torr | 00100 | |
| 1000 Torr | 01000 | |
| 100 psia | 05000 | |
| 200 psia | 10000 | |
| 300 psia | 15000 | |
| 400 psia | 20000 | |
| 500 psia | 25000 | |



430E - 1/18
© 2006-2018 MKS Instruments, Inc.
All rights reserved.

MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810
Tel: 978.645.5500
Tel: 800.227.8766 (in U.S.A.)
Web: www.mksinst.com

MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road
Andover, MA 01810
Tel: 978.975.2350

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230.

Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. Swagelok, VCR® and VCO® are registered trademarks of Swagelok Co., Solon OH. Inconel® is a registered trademark of Inco Alloys International, Inc., Huntington, WV.