



**Pressure &**

**Solutions**

WWW.MKSINST.COM

## 727A & 728A

### BARATRON® GENERAL PURPOSE HEATED ABSOLUTE CAPACITANCE MANOMETERS

Many thin film and industrial applications require accurate, reliable measurement of vacuum in processes where condensation of byproducts could affect the performance of the sensor. To meet these challenging requirements and offer a cost-effective solution, MKS developed the 727A and 728A Baratron Heated Capacitance Manometers. Its blend of small size, high operating temperatures, rugged corrosion-resistant Inconel® sensor, and performance make it an ideal solution for new process equipment and retrofits into existing process tools.

The 727A Baratron is heated to 45°C, while the 728A Baratron is heated to 100°C. Both models use a robust sensor design that provides high tolerance to overpressure, and its all-Inconel construction gives exceptionally high corrosion resistance to process gases and by-products found in many applications. The sensor is manufactured using state-of-the-art fabrication and statistical techniques, and typically achieves surface finishes of better than 10 Ra on all wetted surfaces. The electronics are based on sophisticated analog signal processing technology developed by MKS over the last twenty years.


#### Features & Benefits

- Smallest heated Baratron available, easily mounts inside process systems and even gas cabinets
- Operating temperatures of 45°C or 100°C prevent deposition of process gases and by-products that cause drift
- Full scale pressure ranges from 1000 to 1 Torr
- Typical accuracy of 0.50% of Reading gives most accurate measurements at low end of pressure range
- Measurement is independent of gas composition
- Analog output of 0-10VDC permits interfacing with most control systems

#### Applications

- Semiconductor Precursor Gas Delivery
- Flat Panel Display Manufacturing Equipment
- Optical and Magnetic Data Storage Manufacturing Equipment
- Biopharmaceutical Processing Systems
- Advanced Materials Thermal Processing Systems



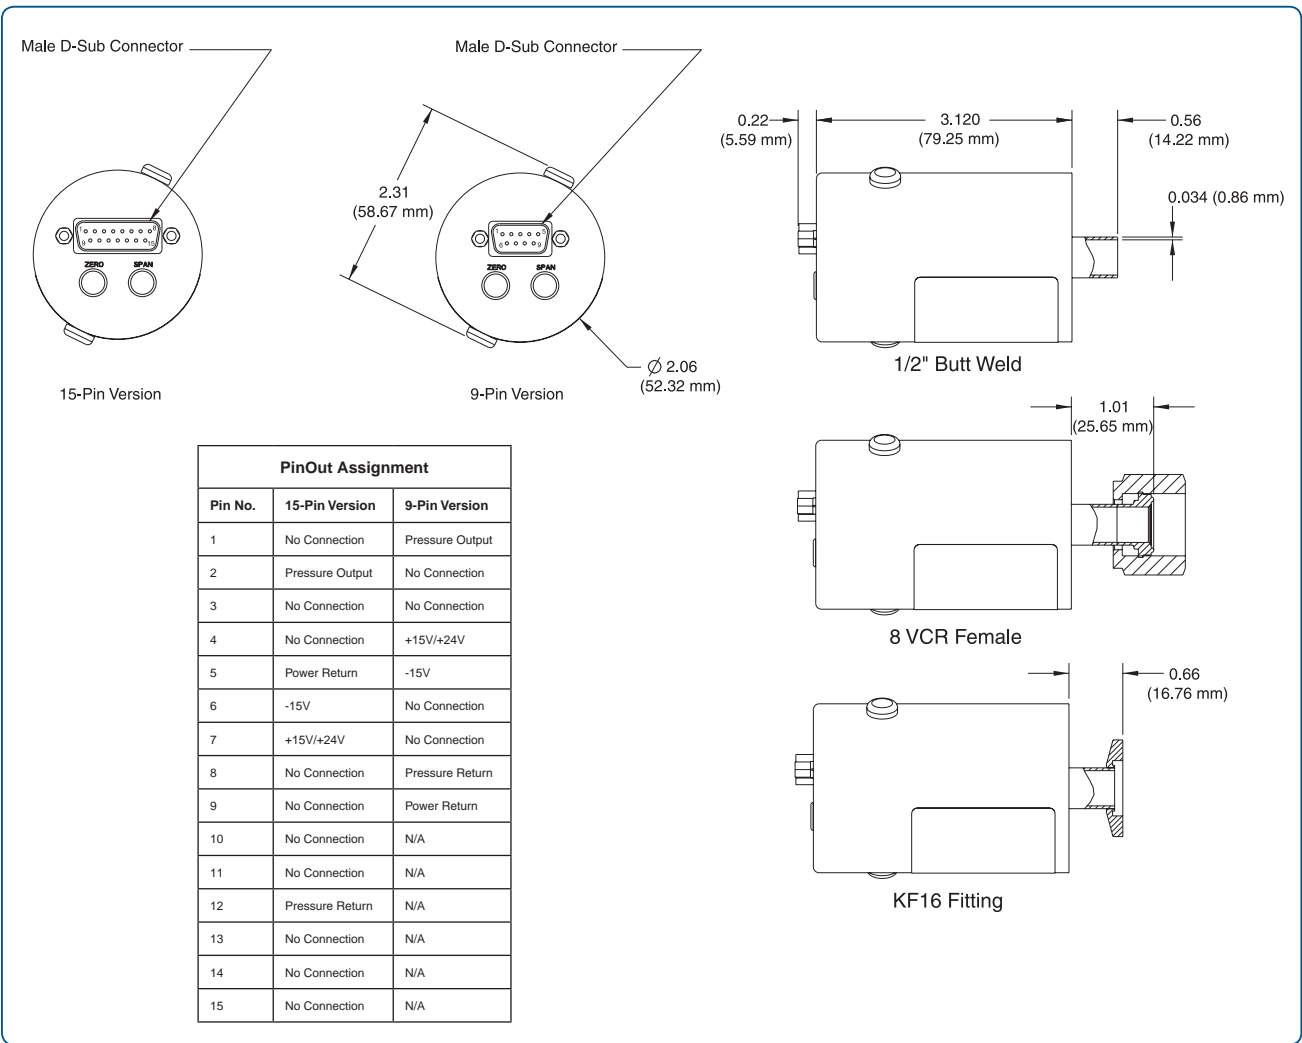

**Dimensional Drawing —**

*Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).*



# Specifications

---

<b>Configuration</b>	Absolute measurement, single end
<b>Full Scale Ranges</b>	1, 2, 10, 30, 50, 100, 200, 500, and 1000 Torr and metric equivalents
<b>Operating Temperatures</b>	
727A	45°C
728A	100°C
<b>Accuracy</b> (including non-linearity, hysteresis, and non-repeatability)	
727A	0.50% of Reading
728A	0.50% of Reading (10 to 1000 Torr ranges) 1.0% of Reading (< 10 Torr ranges)
<b>Response Time</b>	< 75 msec
<b>Temperature Coefficients</b>	
Zero	0.004% of Full Scale/°C for ≥10 Torr; 0.010% of FS/°C for < 10 Torr
Span	0.030% of Full Scale/°C for ≥10 Torr; 0.040% FS/°C for < 10 Torr
<b>Ambient Temperature Range</b>	
727A	15 to 40°C
728A	15 to 50°C
<b>Overpressure Limit</b>	45 psia or 2x Full Scale range, whichever is greater
<b>Minimum Burst Pressure</b>	10x Full Scale range or 90 psi, whichever is greater
<b>Materials Exposed to Process Gases</b>	Inconel® nickel alloy
<b>Electronics</b>	Analog
<b>Input Power Required</b>	
727A	±15VDC or +24VDC ±5% @ 200 mA max
728A	±15VDC ±5% @ 400 mA max
<b>Output Signal</b>	0-10 VDC analog into > 10K ohm load
<b>Electrical Connectors</b>	15-pin D-subminiature or 9-pin D-subminiature
<b>Fittings</b>	
Standard	½" OD Tube
Optional	8 VCR® female, 8 VCO® female, NW16-KF, or 1.33" OD CF

---



## Ordering Information

Ordering Code Example: 728A11TCE2FB	Code	Configuration
727A - 45°C Operating Temperature	727A	728A
728A - 100°C Operating Temperature	728A	
<b>Range (Full Scale)</b>		
1 Torr	01T	11T
2 Torr	02T	
10 Torr	11T	
30 Torr	31T	
50 Torr	51T	
100 Torr	12T	
200 Torr	22T	
500 Torr	52T	
1000 Torr	13T	
<b>Fittings</b>		
Straight tube, ½" OD	BA	CE
8 VCR® female	CE	
8 VCO® female	DA	
NW16-KF	GA	
1.33" OD CF	HA	
<b>I/O</b>		
Standard input voltage, 0-10VDC output	2	2
<b>Accuracy</b>		
Standard 0.50% Reading	F	F
<b>Electrical Connector</b>		
9-pin D-subminiature	A	B
15-pin D-subminiature	B	



### MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201  
Andover, MA 01810  
Tel: 978.645.5500  
Tel: 800.227.8766 (in U.S.A.)  
Web: www.mksinst.com

### MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road  
Andover, MA 01810  
Tel: 978.975.2350