



Pressure &

Solutions

WWW.MKSINST.COM

Micro-Baratron® Pressure Transducers

**AA07A SINGLE ENDED
AA08A FLOW-THROUGH**

Today's process tools and equipment require reliable transducer and display performance in small geometrics with multiple fitting options. MKS addresses all of these issues by offering a building block design that allows custom configuration to meet your needs.

Features & Benefits

- Capacitance technology at a competitive price
- Incoloy® wetted surface provides superior corrosive gas and liquid compatibility
- Available models include 4 to 20mA output
- Highest overpressure ratio tolerances on the market assure no degradation in zero repeatability or performance
- Accuracy specified in % of reading for superior results in lower pressure ranges
- Optional integrated display gives local reading of line pressure (1000 Torr, 100 and 250 PSIA ranges)
- 5 Ra finish (standard)
- Replaceable electronics

Theory of Operation

MKS has been utilizing Baratron® capacitance manometer technology for more than three decades because it yields the most stable, accurate and reliable sensors available today. The sensor construction is of intrinsically durable and well-matched materials, providing extremely low thermal coefficients for wide temperature range performance. MKS then combines this already highly accurate and stable sensor with sophisticated electronics to further

optimize performance in an EMI/RFI insensitive high level output. Enhanced accuracy, long term stability and low temperature coefficients produce the repeatability so important in today's gas measurement applications. As a result, the AA07A/AA08A pressure transducers offer higher accuracy, superior value, and performance.



Accuracy is specified as a percent of **Reading**, not Full Scale, as seen in some of the lower performance devices. **Percent of Reading** accuracy provides you with an even more accurate output signal in the lower scale of the pressure range — where it is needed most. (Figure 1).

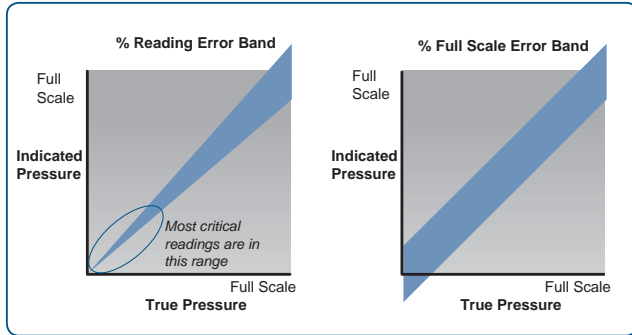


Figure 1 —
Comparison of MKS repeatability expressed as percent of Reading transducer versus other percent of Full Scale transducers.

The Type AA07A/AA08A transducers are ideally suited for use in delivery systems that feed ultrapure gases to critical process systems. Their wetted surfaces exposed to the gas stream have a finish of better than 5 µin Ra. These transducers exhibit superior dry-down characteristics, and contribute no particles above background.

After manufacture and assembly, they are purged with ultraclean nitrogen prior to double bagging in a class 100 environment.

The all-Incoloy® construction of the sensors in the AA07A/AA08A allows for high overpressure tolerances that reduce errors due to line pressure spikes. High burst pressure ratings contribute to overall system safety. On existing gas cabinets and process systems, field replacement of common dial gauges or lower performance transducers is made easy due to the small size, industry standard end-to-end lengths, and electrical interface choices of these transducers.

A variety of fittings are available in different styles and sizes. A selection of power supply inputs (+12 to +32 VDC), output signals (0-5 or 0-10 VDC, or 4-20 mA two-wire), and connectors (9-pin or 15-pin Type "D", Bendix®, or flying leads) enable the equipment or manufacturing engineer to easily interface the AA07A/AA08A pressure transducers with virtually any control system.

The optional local integrated display provides a digital readout of the line pressure at the transducer. The display, which is available on the 1000 Torr, 100 and 250 PSIA ranges with the 0-10VDC output signal, provides a highly-visible red LED display of the pressure and the units of measurement. The display can also be switched to show any of four different units (PSIA, Torr, bar, and kPa) without requiring recalibration or re-ranging of the transducer itself. It takes its power from the incoming transducer voltage, so no additional cables are required.

Specifications

Configuration

Type AA07A Ultraclean, single-ended
Type AA08A Ultraclean, flow-through

Full Scale Ranges

Type AA07A 1000 Torr to 3000 psia
Type AA08A 1000 Torr to 3000 psia

Accuracy (including non-linearity, hysteresis, and non-repeatability)

1.0% of Reading

Temperature Coefficients

Zero 0.02% of F.S./°C, 50 psia to 3000 psia; 0.04% of F.S./°C, 1000 Torr
Span 0.04% of Rdg./°C, 50 psia to 3000 psia; 0.08% of Rdg./°C, 1000 Torr

Ambient Operating Temperature Overpressure Limit¹

1.5x F.S. for ranges from 1000 Torr to 500 psi
1.2x F.S. for ranges from 501 to 3000 psi
10x F.S. for ranges from 1000 Torr to 500 psi
5x F.S. for ranges from 501 to 3000 psi

Burst Pressure

Incoloy®
≤ 5µin Ra max.

Materials Exposed to Gases

Wetted Surfaces

Input Power Required

0 to 10 Volt output +13 VDC to +32 VDC @ 10 mA max.
0 to 5 Volt output +12 VDC to +32 VDC (regulated if below 13 VDC) @ 10 mA max.
2-wire 4-20 mA output +13 to +32 VDC excitation

Output

0 to 10 VDC into > 10K Ω load
0 to 5 VDC into > 10K Ω load
2-wire 4-20 mA output with Typically into 0 to 900 W load (depending upon excitation)
+13 to +32 VDC at transducer terminals

Compliance²

CE

Electrical Connectors

Male 9-pin or male 15-pin Type "D" at end of 9" flying lead,
Bendix® at end of 9" flying lead, or 6' or 10' flying leads

Fittings

Type AA07A (single-ended) ½" weld stub, ¼" weld stub, ¼" butt-weld "T", 4 VCR® male, 4 VCR® female
Type AA08A (flow-through) ¼" weld stub, 4 VCR® male, 4 VCR® female, surface mount

¹The pressure at which the transducer can be subjected without degradation of performance when returned to a normal operation pressure range.


²For CE compliance the mating connection must be properly grounded.




Dimensional Drawing

Type AA07A Single-ended

Connectors


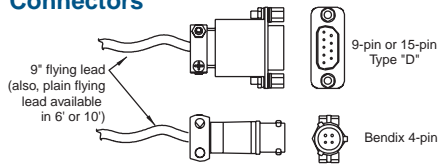


Transducers







Type AA08A Flow-through









Connectors

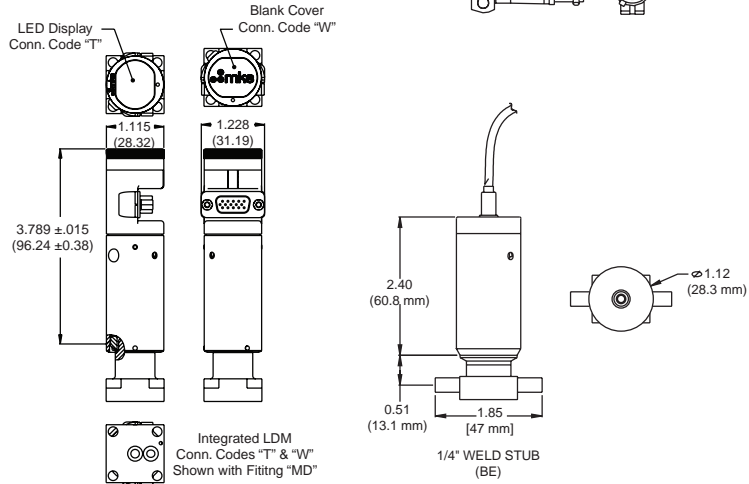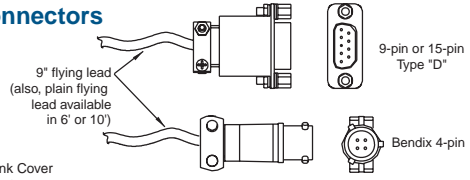

Fittings



Fittings

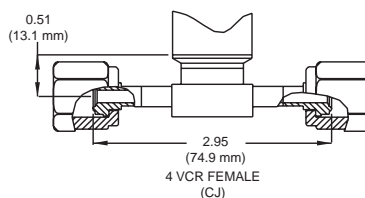

Dimensional Drawing —

Note: Unless otherwise specified, dimensions are nominal values in inches (mm referenced).



Ordering Information

Ordering Code Example: AA07A33PCB2GA1	Code	Configuration	
Model Type			
Type AA07A Single-ended	AA07A	AA07A	
Type AA08A Flow-through	AA08A		
Pressure Range Full Scale*			
1000 Torr	13T	33P	
100 psia	12P		
250 psia	RDP		
1000 psia	13P		
3000 psia	33P		
Fittings			
<i>Type AA07A only:</i>			
½" weld stub	BA	CB	
¼" weld stub	BB		
¼" Butt-welded "T"	BD		
4 VCR male, rotatable	CB		
4 VCR female	CD		
<i>Type AA08A only:</i>			
¼" weld stub (2.045" face-to-face)	BB		
¼" weld stub (1.85" face-to-face)	BE		
4 VCR male, nonrotatable (2.78" face-to-face)	CA		
4 VCR male, nonrotatable (2.24" face-to-face)	CH		
4 VCR female (2.95" face-to-face)	CJ		
4 VCR male, nonrotatable / ¼" weld stub	CL		
4 VCR female (3.045" face-to-face)	CM		
1.5" C-seal surface mount	MA		
1.5" W-seal surface mount	MC		
1 1/8" C-seal surface mount	MD		
1 1/8" W-seal surface mount	MF		
Input/Output			
+13 to +32 VDC/0-10 VDC	2	2	
+12 to +32 VDC/0-5 VDC	3		
4-20 mA with +13 to +32 VDC at terminals	4		
Accuracy			
1% of Reading	G	G	
Connectors			
9-pin Type "D" on end of 9" flying lead	A	A	
15-pin Type "D" on end of 9" flying lead	C		
Bendix 4-pin on end of 9" flying lead	D		
6' flying leads	F		
10' flying leads	L		
Bendix 4-pin 4-20 mA on pins A&B	H		
LDM-C (Red LED), 0-5 VDC and 0-10 VDC with high density D connector	T		
LDM-C (with Blank Cover), 0-5 VDC and 0-10 VDC with high density D connector	W		
Environmental			
Standard enclosure (indoor use)	1	1	
Optional NEMA 4 enclosure for water, ice and dust (useable with F&L connector codes only)	4		

* Other engineering units available (i.e. KPa). Consult Applications Engineering for additional information.



MKS Instruments, Inc. Global Headquarters

2 Tech Drive, Suite 201
Andover, MA 01810
Tel: 978.645.5500
Tel: 800.227.8766 (in U.S.A.)
Web: www.mksinst.com

MKS Instruments, Inc. Pressure & Vacuum Measurement Solutions

Six Shattuck Road
Andover, MA 01810
Tel: 978.975.2350

AA07A_AA08A - 1/18
© 2017-2018 MKS Instruments, Inc.
All rights reserved.

Some Baratron® capacitance manometer products may not be exported to many end user countries without both US and local government export licenses under ECCN 2B230.

Specifications are subject to change without notice. mksinst™ is a trademark and Baratron® is a registered trademark of MKS Instruments, Inc., Andover, MA. Incoloy® is a registered trademark of Inco Alloys International, Inc. Huntington, WV. VCR® is a registered trademark of Swagelok® Co., Solon, OH. Bendix® is a registered trademark of Amphenol Corp., Bendix Connector Operations, Sidney, NY. Vista™ is a trademark of MKS Instruments, Inc., Andover, MA.