



Pressure relief valve, DN 16 ISO-KF




Similar Image

Pressure relief valve, DN 16 ISO-KF

- Protects vacuum systems from over pressures
- Pressure relief valves with stainless steel housing
- An exhaust hose can be attached to the KF connection at the outlet side
- Only intended to be used for vacuum chambers. No safety component in terms of the machinery directive 2006/42/EC

Dimensions

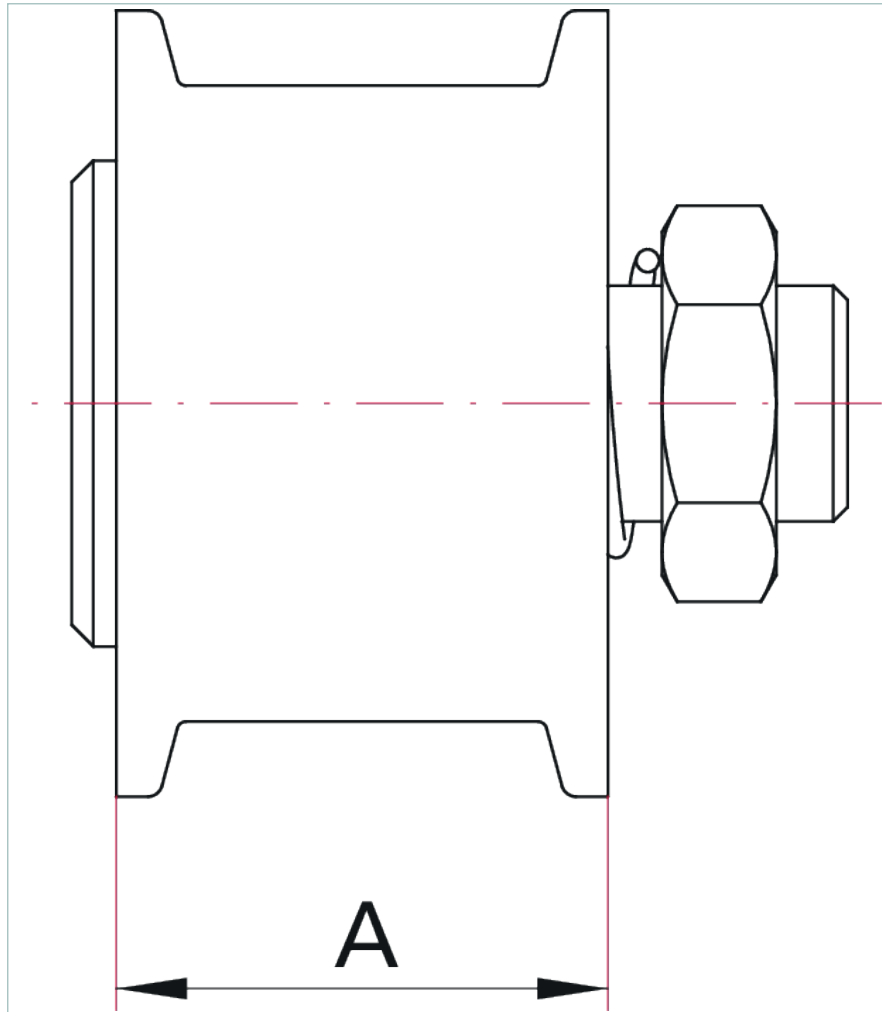

A 25 mm

Technical Data	Pressure relief valve, DN 16 ISO-KF
Differential pressure	modifiable to app. ± 100 hPa
Flange (in)	DN 16 ISO-KF
Flange (out)	DN 16 ISO-KF
Housing	Stainless steel
Nominal diameter	DN 16 ISO-KF
Opening \varnothing	app. 10 mm^2
Opens to a pressure difference of	400 hPa 300 Torr 400 mbar
Pressure range	$1 \cdot 10^{-7}$ hPa to 500 hPa over pressure
Seal	FKM
Temperature range	5-60 °C 41-140 °F 278-333 K
Tightness	$1 \cdot 10^{-9}$ Pa m^3/s $7.5 \cdot 10^{-9}$ Torr l/s $1 \cdot 10^{-8}$ mbar l/s

Technical Data	Pressure relief valve, DN 16 ISO-KF
Type	Pressure relief valve

Order number	
Pressure Relief Valve	120VUS016

VACUUM SOLUTIONS FROM A SINGLE SOURCE

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

COMPLETE RANGE OF PRODUCTS

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

COMPETENCE IN THEORY AND PRACTICE

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a
perfect vacuum solution?
Please contact us:

Pfeiffer Vacuum GmbH
Headquarters · Germany
T +49 6441 802-0
info@pfeiffer-vacuum.de

www.pfeiffer-vacuum.com

All data subject to change without prior notice.

PFEIFFER  **VACUUM**