

Betriebsanleitung
Operating Instructions
Instructions de service
Istruzioni d'uso
Handleiding
Instrucciones para el manejo
Manual de instruções
Naudojimosi instrukcija
Kasutusjuhend
Lietošanas instrukcija
Driftsinstruks
Driftsinstruktioner
Käyttöohje
Driftsvejledning
Instrukcja obsługi






Kezelési útmutató
Návod k obsluze
Navodilo za uporabo
Návod na obsluhu
Upute za rad
Manual de operatii
Treoracha Oibriúcháin
Οδηγίες χρήσης
El Kitabi
Инструкции за експлоатация
Инструкция по эксплуатации
取扱説明書
사용설명서
使用说明书



VT 4.10


2006/42/EG





DIN EN ISO 9001
001929 QM
DIN EN ISO 14001:2015







 	 	 MAX. VACUUM  mbar
 	  	 MAX. DIN EN ISO 3744 $L_{pA} = 60 \text{ dB(A)} - 50\text{Hz}$ $L_{pA} = 62 \text{ dB(A)} - 60\text{Hz}$ $K_{pA} = 3 \text{ dB(A)}$  m³/h







			
			

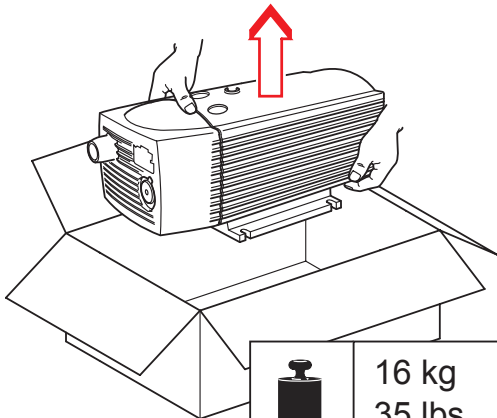
		16 kg 35 lbs
---	---	-----------------

A > 100mm A > 4"	 > 5°C/41°F < 45°C/113°F	 max. 90%	 max. 800m
---	--	---	--

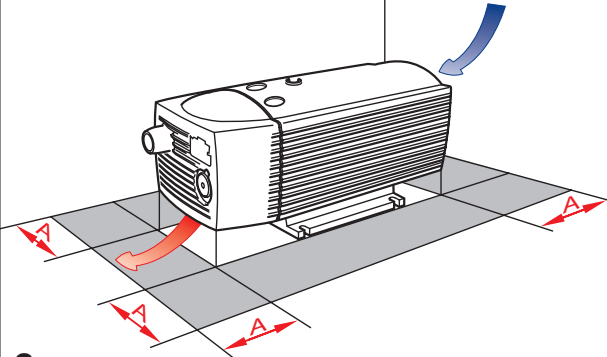
--

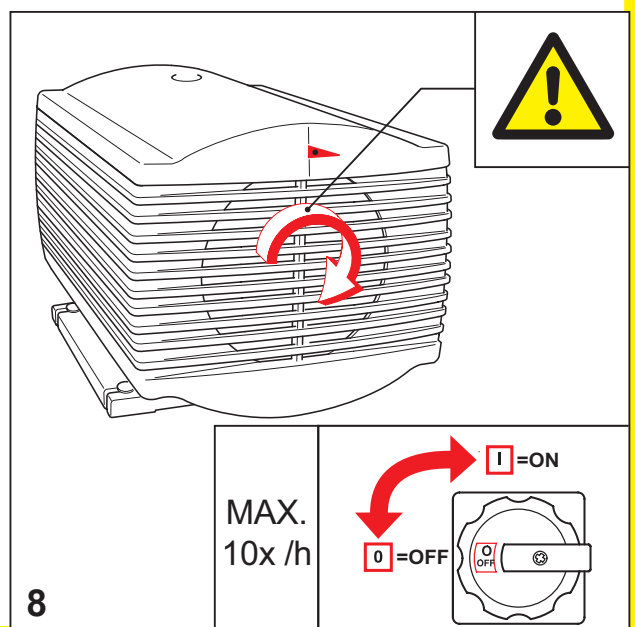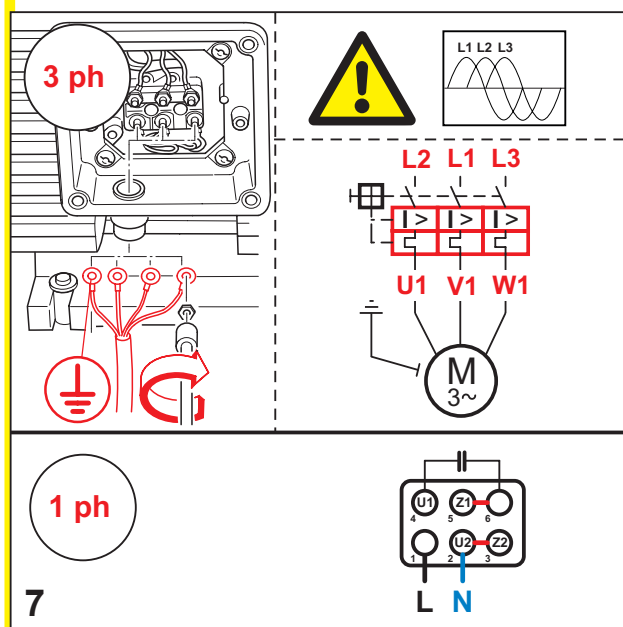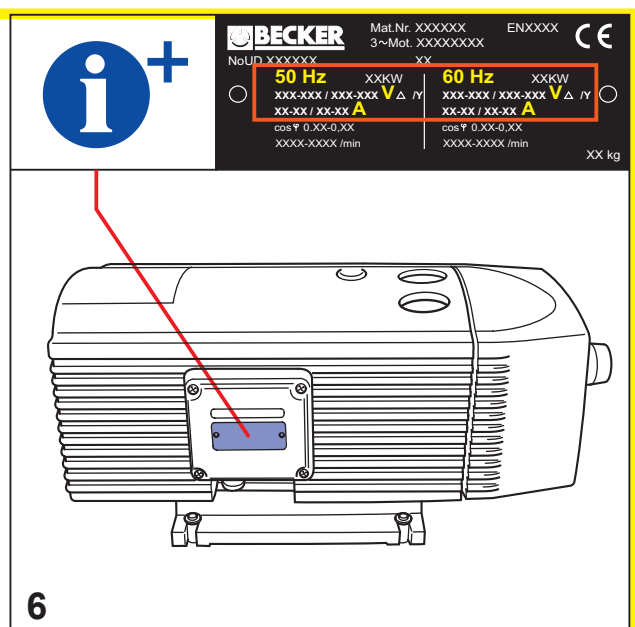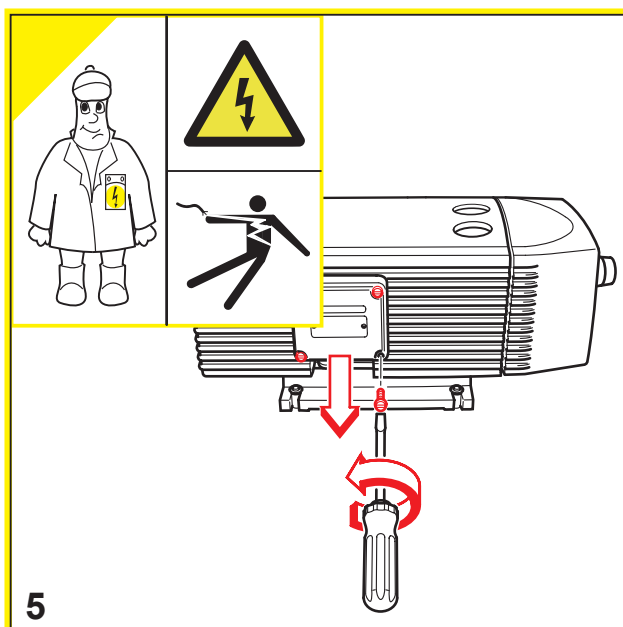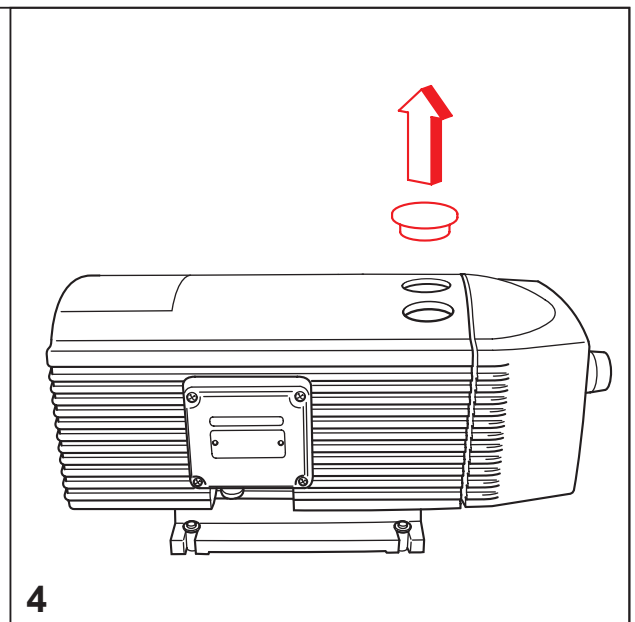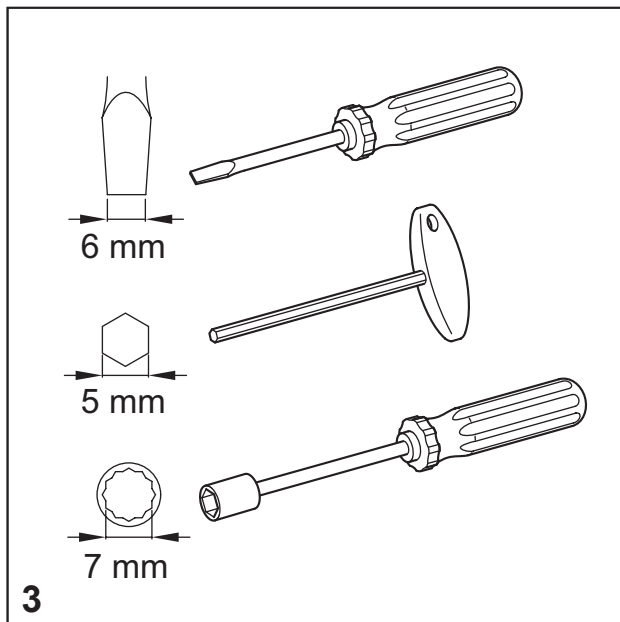

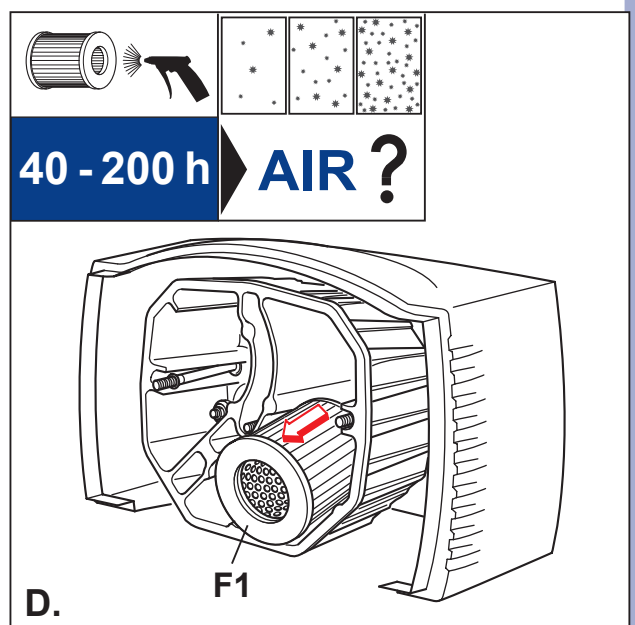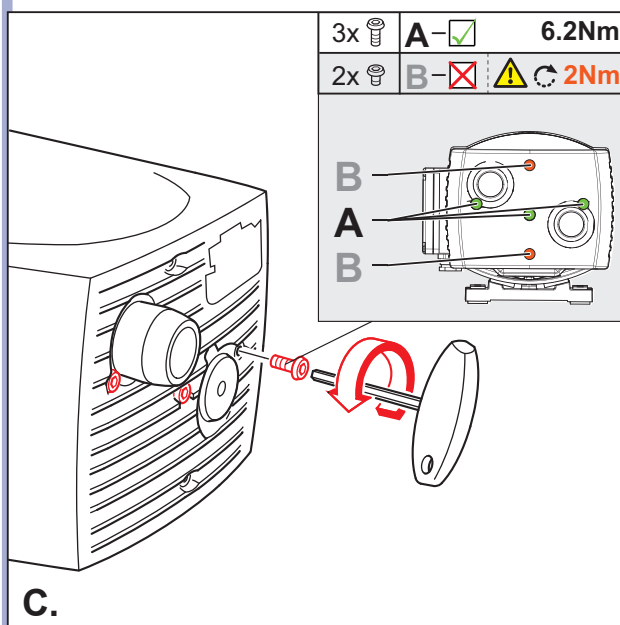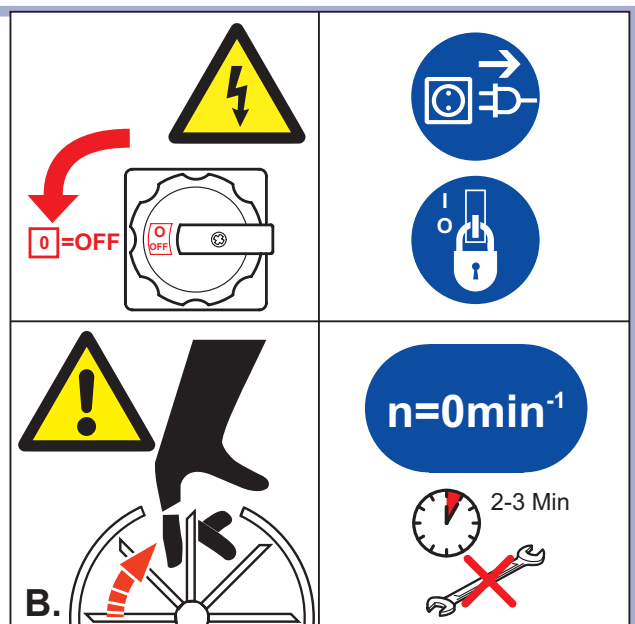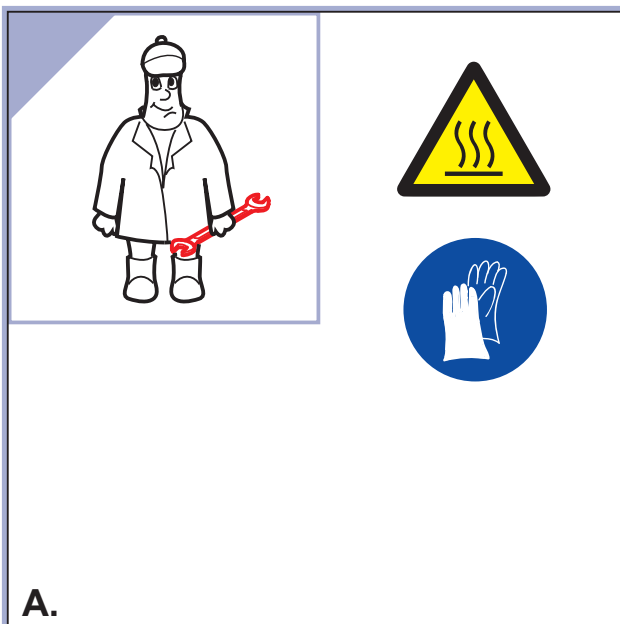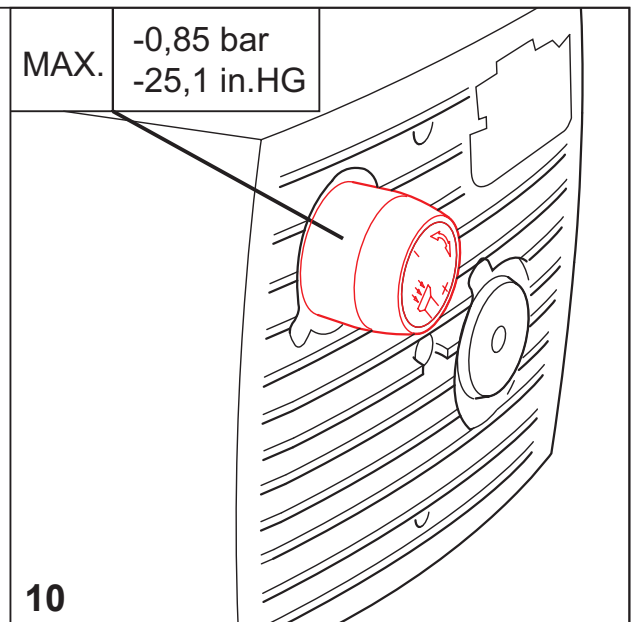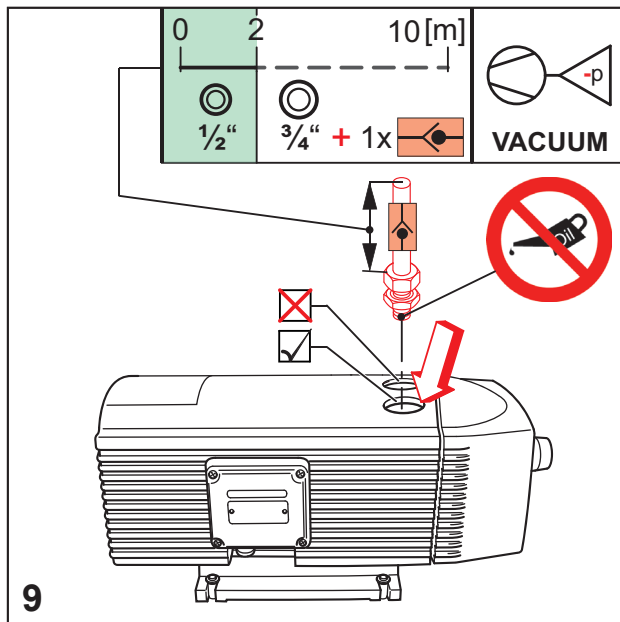




F1: D: 38 mm
H: 38 mm
No.: 90951800000



EN149 - FFP3
42 CFR 84 - N100



E.

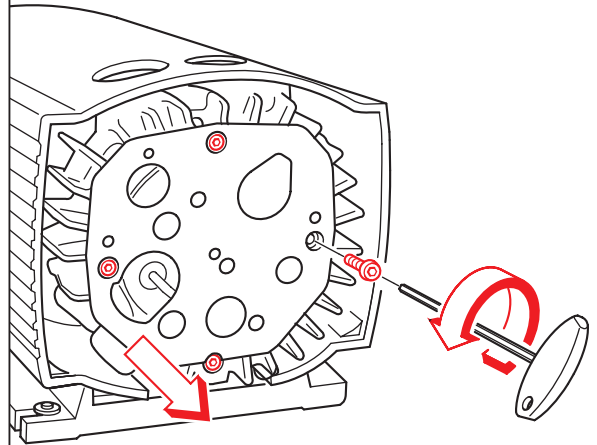

F.



3000 h




$A_{MAX} = 27mm$
 $A_{MIN} = 18mm$

$A_{\text{min}} < 18mm$




→ No. 90132700007 (SET)

G.

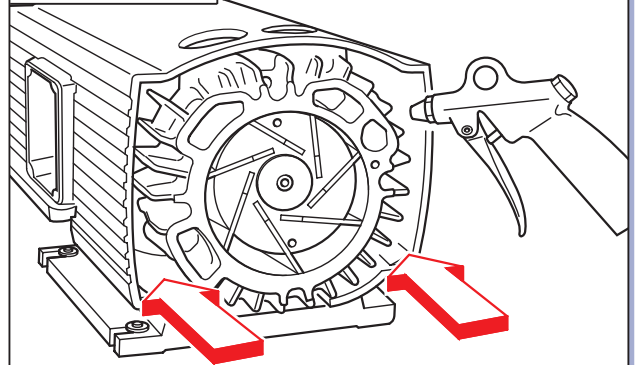

H.



Gebr. Becker GmbH
Hölker Feld 29-31
D-42279 Wuppertal
info@becker-international.com

